



F2SF500LO658300

**FINE LED G2 IP65 24V 7720 48W 830 5Mx10****Description:**

Flexible strip model fine led LAMP brand. Model for MID POWER LED, 3000K color temperature, CRI 80. IP65 protection rating. Insulation class III. Lifetime: 50.000 L70 B10. Supplied with a 5 meter coil and a 3M adhesive on the rear. These strips allow modular cut.

**Dimensions:** 5.000 x 10,2 x 1,4 mm**Weight:** 148 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:****Light output:** 7.710 lm**°K :** 3000**Plum:** 48W**CRI :** 80**Efficacy:** 160,6 lm/w**MacAdam:** 3**Type:** MID POWER LED**Power Supply:** 24VDC**LED Lifetime:** 50.000 L70 B10 (Ta=25°C)**Gear:** Without gear (requires external gear)**Power:** 48W**Light output tolerance +/- 10%**

PHOTOMETRIC DATA :

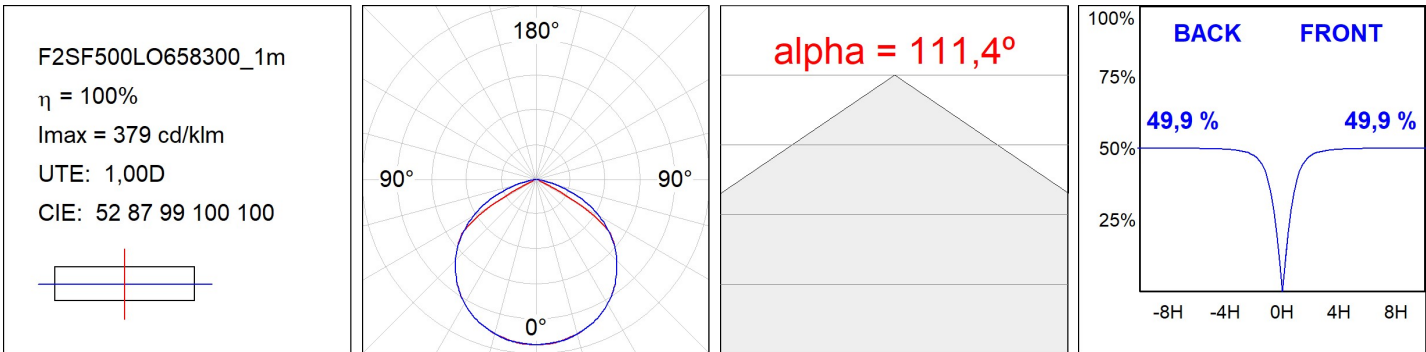

---

**ACCESORIES :**
**Assembly****Product code:**

ELWRST

**Description:**

ACC. ELECTROSTATICS WRIST STRAP

**Product code:**

FICOSU122000N

FISUEC120HG

FISUEC121HG

**Description:**

FINE LED STRIP ACC. 12MM SUR PROFILE 2M  
 FINE LED STRIP ACC. 12MM SUR END COVER  
 FINE LED STRIP ACC. 12MM SUR HOLE COVER

**Product code:**

FICOSU452000N

FISUEC450HG

FISUEC451HG

**Description:**

FINE LED STRIP ACC. 45° PROFILE 2M  
 FINE LED STRIP ACC. 45° END COVER  
 FINE LED STRIP ACC. 45° HOLE COVER

**Product code:**

FIPRRE062000N

FIREEC060HG

FIREEC061HG

**Description:**

FINE LED STRIP ACC. 6MM REC PROFILE 2M  
 FINE LED STRIP ACC. 6MM REC END COVER  
 FINE LED STRIP ACC. 6MM REC HOLE COVER

**Product code:**

FIPRRE122000N

FIREEC120HG

FIREEC121HG

**Description:**

FINE LED STRIP ACC. 12MM REC PROFILE 2M  
 FINE LED STRIP ACC. 12MM REC END COVER  
 FINE LED STRIP ACC. 12MM REC HOLE COVER

**Product code:**

FIPRSU062000N

FISUEC060HG

FISUEC061HG

**Description:**

FINE LED STRIP ACC. 6MM SUR PROFILE 2M  
 FINE LED STRIP ACC. 6MM SUR END COVER  
 FINE LED STRIP ACC. 6MM SUR HOLE COVER

**Product code:**

FISUBR

FISUBR45

**Description:**

FINE LED STRIP ACC. SUR BRACKET  
 FINE LED STRIP ACC. 45° BRACKET

---

**ACCESORIES :**
**Optical**

## FINE LED



**Product code:**

FIDI2000OP

**Description:**

FINE LED STRIP ACC. OPAL DIFFUSER 2M



**Product code:**

FIDI2000TR

**Description:**

FINE LED STRIP ACC. TRANS DIFFUSER 2M

---

### ACCESORIES :

#### Adjustment and control



**Product code:**

DRV676024D

**Description:**

DRV 60W 24V 90-305V PWM/DA IP67



**Product code:**

DRV677524N

**Description:**

DRV 75W 24V 220-240V NR IND IP67

**Importante:**

- 1- En caso de cortes intermedios, para una conexión segura se recomienda soldar los cables a los terminales +/- de la tira flexible. Conectar la tira en la polaridad correcta.
- 2- En caso de cortes intermedios en los modelos IP65, se deben sellar las extremidades cortadas para garantizar el IP65.
- 3- La instalación debe ser sobre superficies lisas, limpias de polvo y grasa, y con grapas de sujeción. En otro tipo de superficie, se recomienda instalar la tira en perfilera de aluminio.
- 4- Cada tira de LED (bobina de 5m) debe ir alimentada con un driver. Para asegurar las prestaciones del producto, utilizar los drivers homologados por LAMP.
- 5- La garantía no cubre los daños creados por el incumplimiento de las recomendaciones.

**Important:**

- 1- In case of intermediate cuts, for a secure connection it is recommended to solder the wires to the +/- flexible strip terminals. Connect the strip with the correct polarity.
- 2- In case of intermediate cuts in IP65 models you must seal the cut ends to ensure the IP65.
- 3- The installation must be carried out on smooth, dust and fat-free surfaces using clamping plates. On other types of surface you are recommended to install the strip on aluminium profiles.
- 4- Each LED strip (5m coil) must be powered by a driver. To ensure product performance, use LAMP-approved drivers.
- 5- The warranty does not cover any damage caused owing to a breach of the recommendations.

**Important:**

- 1- En cas de découpes intermédiaires, pour une connexion sécurisée, il est recommandé de souder les câbles aux bornes +/- de la bandeau flexible. Connecter le bandeau sur la polarité appropriée.
- 2- En cas de découpes intermédiaires dans les modèles IP65 vous devrez protéger les extrémités coupées afin d'assurer l'IP65.
- 3- L'installation doit s'effectuer sur des surfaces lisses, exemptes de poussière et de graisse et au moyen d'agrafes de fixation. Sur tout autre type de surface, on recommande d'installer le bandeau sur un profilé en aluminium.
- 4- Chaque bandeau à LED (bobine de 5 m) doit être alimenté avec un driver. Pour garantir les prestations du produit, utiliser les drivers homologués par LAMP.
- 5- La garantie ne couvre pas les dommages dérivés du non respect des recommandations.