

FINE LED

F1SF500LO207300




FINE LED IP20 24V 7250LM 90W 830 5MX8

Description:

Flexible strip model FINE LED IP20 24V 7250LM 90W 830 5MX8, LAMP brand. Model for MID-POWER LED, warm white color temperature. IP20 protection rating. Insulation class III. Supplied with a 5 meter coil and a 3M adhesive on the rear. These strips allow modular cut.

Weight: 148 g




Installation: Surface

TECHNICAL SPECIFICATIONS:

|               |                   |          |                                       |
|---------------|-------------------|----------|---------------------------------------|
| Light output: | 7.000 lm          | °K :     | 3000                                  |
|               |                   | CRI :    | 80                                    |
| Type:         | MID POWER CITIZEN | MacAdam: | 3                                     |
| LED Lifetime: | 50.000 L70        |          |                                       |
| Power:        | 93W               | Gear:    | Without gear (requires external gear) |

Light output tolerance +/- 10%

PHOTOMETRIC DATA :

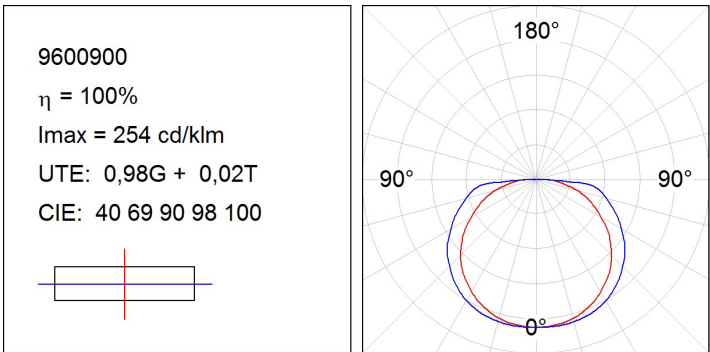

ACCESORIES :

Assembly



**Product code:**  
ELWRST

**Description:**  
ACC. ELECTROSTATICS WRIST STRAP




**Product code:**  
FICOSU122000N  
FISUEC120HG  
FISUEC121HG

**Description:**  
FINE LED STRIP ACC. 12MM SUR PROFILE 2M  
FINE LED STRIP ACC. 12MM SUR END COVER  
FINE LED STRIP ACC. 12MM SUR HOLE COVER



**Product code:**  
FICOSU452000N  
FISUEC450HG  
FISUEC451HG

**Description:**  
FINE LED STRIP ACC. 45° PROFILE 2M  
FINE LED STRIP ACC. 45° END COVER  
FINE LED STRIP ACC. 45° HOLE COVER



**Product code:**  
FIPPRE062000N  
FIREEC060HG  
FIREEC061HG

**Description:**  
FINE LED STRIP ACC. 6MM REC PROFILE 2M  
FINE LED STRIP ACC. 6MM REC END COVER  
FINE LED STRIP ACC. 6MM REC HOLE COVER



**Product code:**  
FIPPRE122000N  
FIREEC120HG  
FIREEC121HG

**Description:**  
FINE LED STRIP ACC. 12MM REC PROFILE 2M  
FINE LED STRIP ACC. 12MM REC END COVER  
FINE LED STRIP ACC. 12MM REC HOLE COVER



**Product code:**  
FIPRSU062000N  
FISUEC060HG  
FISUEC061HG

**Description:**  
FINE LED STRIP ACC. 6MM SUR PROFILE 2M  
FINE LED STRIP ACC. 6MM SUR END COVER  
FINE LED STRIP ACC. 6MM SUR HOLE COVER



**Product code:**  
FISUBR  
FISUBR45

**Description:**  
FINE LED STRIP ACC. SUR BRACKET  
FINE LED STRIP ACC. 45° BRACKET

ACCESORIES :

Optical



**Product code:**

FIDI2000OP

**Description:**

FINE LED STRIP ACC. OPAL DIFFUSER 2M



**Product code:**

FIDI2000TR

**Description:**

FINE LED STRIP ACC. TRANS DIFFUSER 2M

## ACCESORIES :

### Adjustment and control



**Product code:**

CL2012024A

CL2012024D

**Description:**

ACC. 1-10V PWM LED CONVERTER 24V 120W

ACC. DALI PWM LED CONVERTER 24V 120W



**Product code:**

CL2014424

**Description:**

ACC. DALI/DMX PWM RGB CONVERTER 24V 144W




**Product code:**

CL2043224RGB

**Description:**

ACC. RGB RCONTROLLER 24V 432W



**Product code:**

DRV201002430N

**Description:**

ACC DRIVER 100W 24V 220-240V 30MM NR IND



**Product code:**

DRV2010024D

**Description:**

DRV 100W 24V 220-240V DA IND.



**Product code:**

DRV202024N

**Description:**

ACC. DRIVER 24V 20W



**Product code:**

DRV206024N

**Description:**

ACC. DRIVER 24V 60W



**Product code:**

DRV6710024N

**Description:**

DRV 100W 24V 100-305V NR IP67



**Product code:**

DRV688024N

**Description:**

ACC. DRIVER IP68 24V 80W


**Importante:**

- 1- En caso de cortes intermedios, para una conexión segura se recomienda soldar los cables a los terminales +/- de la tira flexible. Conectar la tira en la polaridad correcta.
- 2- En caso de cortes intermedios en los modelos IP65, se deben sellar las extremidades cortadas para garantizar el IP65.
- 3- La instalación debe ser sobre superficies lisas, limpias de polvo y grasa, y con grapas de sujeción. En otro tipo de superficie, se recomienda instalar la tira en perfilera de aluminio.
- 4- Cada tira de LED (bobina de 5m) debe ir alimentada con un driver. Para asegurar las prestaciones del producto, utilizar los drivers homologados por LAMP.
- 5- La garantía no cubre los daños creados por el incumplimiento de las recomendaciones.

**Important:**

- 1- In case of intermediate cuts, for a secure connection it is recommended to solder the wires to the +/- flexible strip terminals. Connect the strip with the correct polarity.
- 2- In case of intermediate cuts in IP65 models you must seal the cut ends to ensure the IP65.
- 3- The installation must be carried out on smooth, dust and fat-free surfaces using clamping plates. On other types of surface you are recommended to install the strip on aluminium profiles.
- 4- Each LED strip (5m coil) must be powered by a driver. To ensure product performance, use LAMP-approved drivers.
- 5- The warranty does not cover any damage caused owing to a breach of the recommendations.

**Important:**

- 1- En cas de découpes intermédiaires, pour une connexion sécurisée, il est recommandé de souder les câbles aux bornes +/- de la bandeau flexible. Connecter le bandeau sur la polarité appropriée.
- 2- En cas de découpes intermédiaires dans les modèles IP65 vous devrez protéger les extrémités coupées afin d'assurer l'IP65.
- 3- L'installation doit s'effectuer sur des surfaces lisses, exemptes de poussière et de graisse et au moyen d'agrafes de fixation. Sur tout autre type de surface, on recommande d'installer le bandeau sur un profilé en aluminium.
- 4- Chaque bandeau à LED (bobine de 5 m) doit être alimenté avec un driver. Pour garantir les prestations du produit, utiliser les drivers homologués par LAMP.
- 5- La garantie ne couvre pas les dommages dérivés du non respect des recommandations.