
#### **Product datasheet**

# **B-SIDE LED**

### BS1DB1303840NG





# B-SIDE LED 135 250 NW GR.

### **Description:**

Bollard model B-SIDE LED 135 250, LAMP brand. Made in extruded recycled aluminum with a rate of 80% and injection, and translucent polycarbonate diffuser. 135mm in height. Its base has an anti-corrosion electro coating treatment. Model for HI-POWER LED, with 4000K colour temperature, CRI 80 and control gear included. IP65, IK10 protection rating. Insulation class I. Lifetime: 50. 000 L70 B10. BUG Rate: B0 U1 G0, ULOR: 27,2%. Available finishes: anthracite and textured grey.

Finish:Texturised greyDimensions:Ø 160 mm x 135 mmWeight: 1.450 g

Installation: Standing

#### **TECHNICAL SPECIFICATIONS:**

Light output:	138 lm	⁰K :	4000
Plum:	3,5W	CRI :	80
Efficacy:	39,4 lm/w	Power Supply:	110-240V 50/60Hz
Туре:	HIGH POWER LED	Gear:	Electronic
LED Lifetime:	50.000 L70 B10 (Ta=25ºC)		
Power:	2W		

#### Light output tolerance +/- 10%



## CUSTOM MADE OPTIONS:



Worktitude for light

# **B-SIDE LED**


5841253 η **= 4**%

UTE: 0,01T

BS1DB1303840NG

B-SIDE LED 135 250 NW GR.








# **B-SIDE LED**



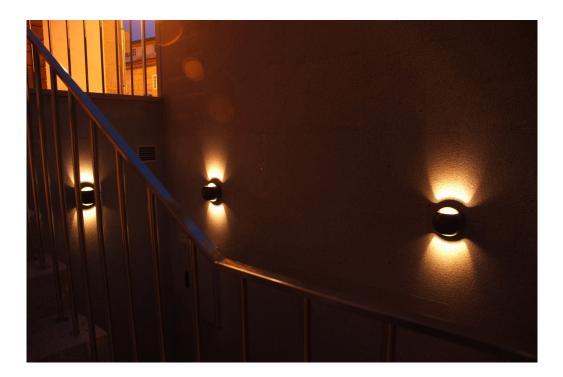



LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es