

NI1452ST740NG




NIU LED STREET CL.II 4500 GR.

Description:


Urban luminaire NIU LED STREET CL. II 4500, LAMP brand. Made of texturised grey lacquered aluminium injection and flat tempered serigraphed glass. Model for HI-POWER LED with 4000K temperature, CRI 70 and control gear included. With street optics. IP66, IK10 protection rating. Insulation class II. To adapt to Ø60mm. Lifetime: 50. 000 L90. BUG Rate: B1 U1 G1, ULOR 0%.

Finish: Texturised grey**Weight:** 12.450 g**Maximum surface exposed to wind:** 0.18 M2**Installation:** Integrated in light-pole**TECHNICAL SPECIFICATIONS:**

| | | | |
|----------------------|----------------------|----------------------|------------------|
| Light output: | 3.439 lm | °K : | 4000 |
| Plum: | 52W | CRI : | 70 |
| Efficacy: | 66,1 lm/w | MacAdam: | 4 |
| Type: | HIGH POWER LED | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 50.000 L90 (Ta=25°C) | Gear: | Electronic |
| Power: | 48W | | |

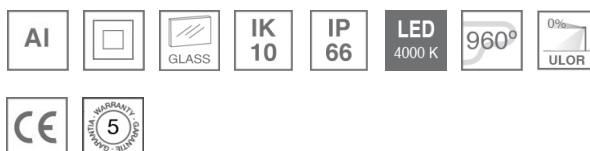Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

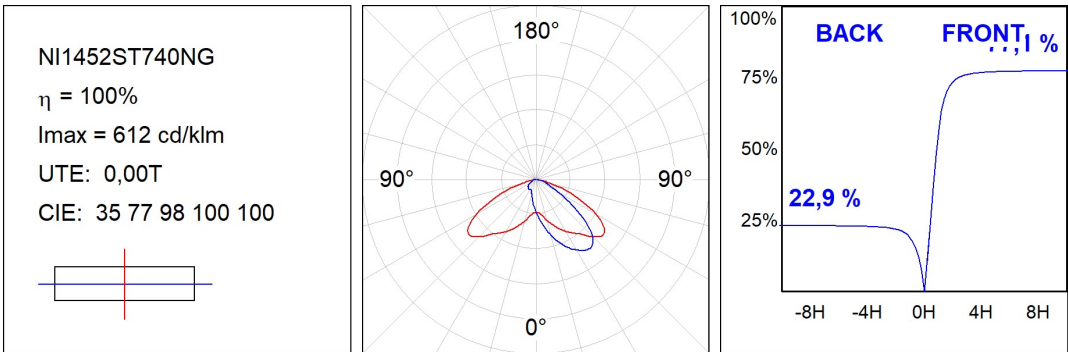

ACCESORIES :

Assembly



Product code:

NIARED60G

Description:

NIU ACC. IND Ø60 ARM



Product code:

NIPOAD76G

Description:

NIU ACC. Ø76 POLE ADAPTER

ACCESORIES :

Support



Product code:

NIAR650G

Description:

NIU ACC. WALL ARM



Product code:

NIPOBR135G

Description:

NIU ACC. IND Ø60-135 POLE CLAMP



Product code:

NIPOBR48G

NIPOBR60G

Description:

NIU ACC. Ø48 POLE BRACKET

NIU ACC. Ø60 POLE BRACKET