


Quiet Baffle Fil 45

Quiet Baffle Fil 45



DESCRIPTION:

Linear pendant luminaire integrated in a sound-absorbing structure with fabric-type finish, made of recycled material rPET, model Quiet Baffle Fil 45, 840, 1120 and 1680 mm long, by Lamp. Opal comfort diffuser consisting of a translucent polycarbonate diffuser and optical sheet for lower light distribution and glare control UGR19. Maximum visual comfort versions also available in models with Tech diffuser. Made of recycled aluminium extrusion. Available in various colour temperatures (3000 and 4000K) and dynamic white option (2700-6500K), LED technology with CRI of 80 and CRI 90 option. Dali or OnOff electronic wiring, with the possibility of control via Bluetooth LE. Degree of protection IP20, IK07. Insulation class I. Photobiological safety group 0. Flicker-free.

Dimensions: 840/1120/1680mmx300x72mm

Panel thickness: 12mm (Option 24mm)

Panel composition: rPET 75% Recycled

Fire Resistance: B-s1, d0

Emissions: LOW VOC/ Low formaldehyde emissions

INSTALLATION: Suspended, surface ceiling rose

QUIET BAFFLE FIL 45

Family	Format	Lm LED/m	Optic	CRI	K	Gear
QBF41	084 840mm	M0 2320lm	PR Prismatic	8 80	30 3000 K	N ON/OFF
	112 1120mm				40 4000 K	D DALI
	168 1680mm					

Code configurator:

SOUND ABSORBENCE

Separated 50mm from the ceiling

12mm aw 0.60
24mm aw 0.70

Separated 200mm from the ceiling

12mm aw 0.85
24mm aw 0.95

Separated 400mm from the ceiling

12mm aw 0.85
24mm aw 0.95

LIGHT OUTPUT AND POWER

QUIET BAFFLE FIL 45

	K	CRI	840mm		1120mm		1680mm	
			W	lm Output	W	lm Output	W	lm Output
PR	3000	80	12	1160	16	1547	23	2319
	4000	80	12	1218	16	1624	23	2437

Quiet Baffle Fil 45

TECHNICAL SPECIFICATIONS:



QUALITY CERTIFICATES:



FINISHES:

B: Black : ● RAL 9011 BLACK MATT

G: Grey : ● RAL 9006

W: White 02: ○ RAL 9010 WHITE MATE


FINISHES:



Quiet Baffle Fil 45

PHOTOMETRIC DATA :

OPAL COMFORT

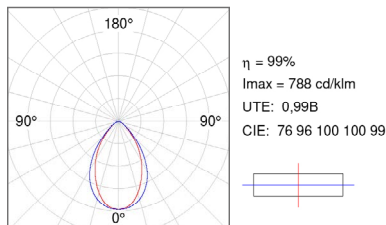

INSTALATION :

