



Fil 35

Fil 35



DESCRIPTION:

"Recessed, trimless, surface-mounted or pendant structure model FIL35 from 840 to 2240 mm in length from Lamp brand. Available with a choice of medium flux (2650 lm LED/m) or low flux (1470 lm LED/m). Direct, direct-indirect and direct-indirect light distribution available. Possibility of designing complex shapes with 90° horizontal and vertical bends. Made of recycled aluminium extrusion (80-85%). Models with opal or opal comfort diffuser consisting of a translucent polycarbonate diffuser and optical sheet for control of light distribution and lower glare UGR19. Colour temperature available in 3000 K or 4000 K with CRI 80. On/Off or Dali control gear with possibility of control via Bluetooth LE. With IP20, IK07 degree of protection. Insulation class I. Photobiological safety group 0."

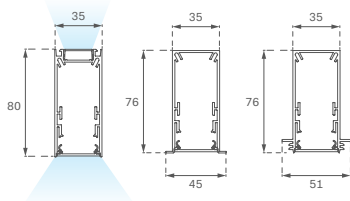

Available finishes:

- White, black or grey.

Dimensions: 35x80mm.

Weight: 1760 - 4900 g

INSTALLATION: Recessed, trimless, surface mounted or suspended. Horizontal and vertical bends.

FIL 35 DIRECT

Family	Installation	Formats	Lm LED	Optic	CRI	K	Gear	Finishes
F31	SF Surface RE Recessed	084 840mm	LO 1470lm	OP Opal	8 80	30 3000 K 40 4000 K	N ON/OFF D DALI	B Black 02
		112 1120mm	MO 2650lm					W White 02
		140 1400mm						G Grey 01
		168 1680mm						
		196 1960mm						
		224 2240mm						
	TR Trimless	084 840mm	LO 1470lm	OC Opal Comfort	8 80	30 3000 K 40 4000 K	N ON/OFF D DALI	W White 02
		112 1120mm	MO 2650lm					
		140 1400mm						
		168 1680mm						
		196 1960mm						
		224 2240mm						
		084 840mm	LO 1470lm	OC Opal Comfort	8 80	30 3000 K 40 4000 K	N ON/OFF D DALI	
		112 1120mm	MO 2650lm					
		140 1400mm						
		168 1680mm						

Code configurator:

LIGHT OUTPUT AND POWER

FIL 35 DIRECT

		K	CRI	840mm		1120mm		1400mm		1680mm		1960mm		2240mm	
				W	lm Output	W	lm Output	W	lm Output	W	lm Output	W	lm Output	W	lm Output
LO	OP	3000	80	8	912	11	1216	14	1520	16	1824	19	2128	22	2432
		4000	80	8	912	11	1216	14	1520	16	1824	19	2128	22	2432
	OC	3000	80	8	834	11	1112	14	1390	16	1668	-	-	-	-
		4000	80	8	874	11	1165	14	1461	16	1748	-	-	-	-
MO	OP	3000	80	12	1281	16	1708	18	2135	22	2562	25	2989	32	3416
		4000	80	12	1329	16	1772	18	2215	22	2658	25	3101	32	3544
	OC	3000	80	12	1179	16	1571	18	1964	22	2357	-	-	-	-
		4000	80	12	1223	16	1630	18	2038	22	2445	-	-	-	-

Fil 35

FIL 35 DIRECT/INDIRECT

Family	Installation	Formats	Lm LED	Optic	CRI	K	Gear	Finishes				
F31	SF Surface	084 840mm	LO 1470lm	IO Dir/Ind Opal	8 80	30 3000 K	N ON/OFF	B Black 02				
		112 1120mm	MO 2650lm						D DALI	W White 02		
		140 1400mm									G Grey 01	
		168 1680mm										
		196 1960mm										
		224 2240mm										
		084 840mm	LO 1470lm									IP Dir/Ind Opal Comfort
		112 1120mm	MO 2650lm									
		140 1400mm										
		168 1680mm										

Code configurator:

LIGHT OUTPUT AND POWER

FIL 35 DIRECT/INDIRECT

		840mm		1120mm		1400mm		1680mm		1960mm		2240mm			
		K	CRI	W	lm Output	W	lm Output	W	lm Output	W	lm Output	W	lm Output		
LO	OP	3000	80	6	549	7	792	9	990	11	1187	13	1085	14	1583
		3000	80	8	912	11	1216	14	1520	16	1824	19	2128	22	2432
	OC	4000	80	6	620	7	808	9	1033	11	1238	13	1445	14	1651
		4000	80	8	912	11	1216	14	1520	16	1824	19	2128	22	2432
	OC	3000	80	6	597	7	796	9	995	11	1193	-	-	-	-
		3000	80	8	834	11	1112	14	1390	16	1668	-	-	-	-
OC	4000	80	6	658	7	777	9	967	11	1164	-	-	-	-	
	4000	80	8	874	11	1165	14	1461	16	1748	-	-	-	-	
MO	OP	3000	80	6	807	7	1090	12	1373	14	1655	17	1228	15	2221
		3000	80	12	1287	16	1708	18	2135	22	2562	25	2989	32	3416
	OC	4000	80	6	852	7	1152	12	1293	14	1559	17	1116	15	673
		4000	80	12	1329	16	1772	18	2215	22	2658	25	3101	32	3544
	OC	3000	80	6	742	7	1003	12	1263	14	1523	-	-	-	-
		3000	80	12	1179	16	1571	18	1964	22	2357	-	-	-	-
OC	4000	80	6	784	7	1060	12	1335	14	1611	-	-	-	-	
	4000	80	12	1223	16	1630	18	2038	22	2445	-	-	-	-	

FINISHES:

- B:** Black 02: ● RAL 9011 BLACK MATE
- W:** White 02: ○ RAL 9010 WHITE MATE
- G:** Grey 01: ● ANODIZED SILVER MATT

TECHNICAL SPECIFICATIONS:




QUALITY CERTIFICATES:




Fil 35

PHOTOMETRIC DATA :


Opal Direct

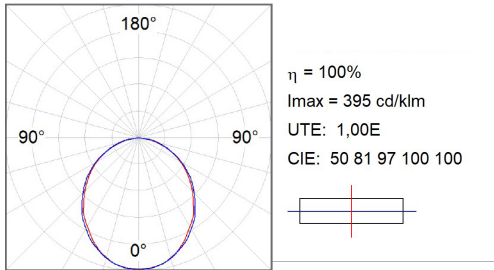


Opal Comfort Direct

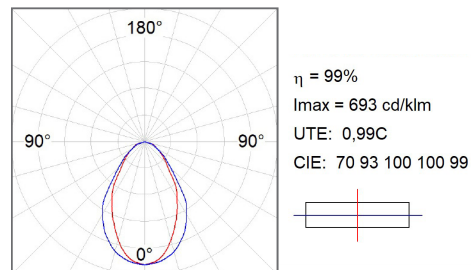

Opal Direct/Indirect

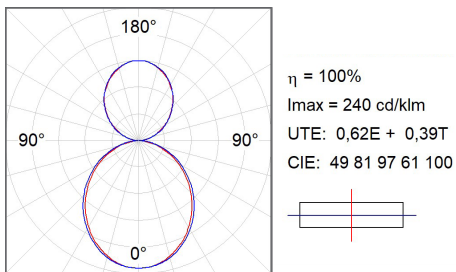


Opal Comfort Direct/Indirect

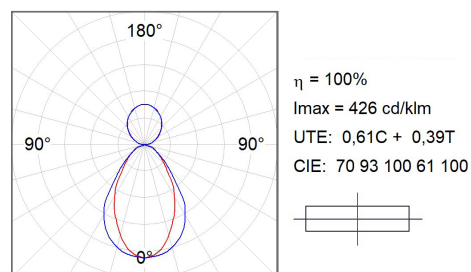


Fil 35

ACCESSORIES:




Product Code:
F3PREX/MMB

Description:
FIL 35 ACC. REC PROFIL X/MM BK.




Product Code:
F3PREX/MMG

Description:
FIL 35 ACC. REC PROFIL X/MM GR.




Product Code:
F3PREX/MMW

Description:
FIL 35 ACC. REC PROFIL X/MM WH.




Product Code:
F3PRSUX/MMB

Description:
FIL 35 ACC. SUS PROFIL X/MM BK.




Product Code:
F3PRSUX/MMG

Description:
FIL 35 ACC. SUS PROFIL X/MM GR.



Product Code:
F3PRSUX/MMW

Description:
FIL 35 ACC. SUS PROFIL X/MM WH.




Product Code:
F3PRTRX/MMW

Description:
FIL 35 ACC. TRIMLESS PROFIL X/MM WH.

Fil 35

ACCESSORIES:




Product Code:

F3SUECB

Description:

FIL35 ACC. SUR END COVER BK.



Product Code:

F3SUECG

Description:

FIL35 ACC. SUR END COVER GR.




Product Code:

F3SUECW

Description:

FIL35 ACC. SUR END COVER WH.




Product Code:

F3REECB

Description:

FIL35 ACC. REC END COVER BK.




Product Code:

F3REECG

Description:

FIL35 ACC. REC END COVER GR.



Product Code:

F3REECW

Description:

FIL35 ACC. REC END COVER WH.



Product Code:

F3TRECW

Description:

FIL35 ACC. TRIM END COVER WH.

Fil 35

ACCESSORIES:




Product Code:

F3JO
F3REJO

Description:

FIL35 ACC. INTM JOINT B
FIL35 ACC. INTM JOINT B RECESSED



Product Code:

F4DIX/MMOP

Description:

FIL 45 ACC. OPAL DIFFUSER X/MM

Fil 35

ACCESSORIES:



Product Code:

F3SUCAEMFA1000NB
F3SUCAEMFA4000NB

Description:

ACC. ELECMEC FIL35 QUICK SUSP 1M BK.
ACC. ELECMEC FIL35 QUICK SUSP 4M BK.



Product Code:

F3SUCAEMFA1000NG
F3SUCAEMFA4000NG

Description:

ACC. ELECMEC FIL35 QUICK SUSP 1M GR.
ACC. ELECMEC FIL35 QUICK SUSP 4M GR.



Product Code:

F3SUCAEMFA1000NW
F3SUCAEMFA4000NW

Description:

ACC. ELECMEC FIL35 QUICK SUSP 1M WH.
ACC. ELECMEC FIL35 QUICK SUSP 4M WH.



Product Code:

F3SUCAWI1000DB
F3SUCAWI4000DB

Description:

ACC. ELECMEC FIL35 QUICK SUSP 1M 5P BK.
ACC. ELECMEC FIL35 QUICK SUSP 4M 5P BK.



Product Code:

F3SUCAWI1000DG
F3SUCAWI4000DG

Description:

ACC. ELECMEC FIL35 QUICK SUSP 1M 5P GR.
ACC. ELECMEC FIL35 QUICK SUSP 4M 5P GR.



Product Code:

F4SUCAWI4000DW
F4SUCAWI1000DW

Description:

ACC. ELECMEC FIL45 QUICK SUSP 1M 5P WH.
ACC. ELECMEC FIL45 QUICK SUSP 4M 5P WH.



Product Code:

F3SUWIDE1000G

Description:

FIL35 ACC. QUICK STEEL CABLE 1M NK.



Product Code:

F3SUWIDE4000G

Description:

FIL35 ACC. QUICK STEEL CABLE 3M NK.