



# Kombic 150 Downlight

## KOMBIC DOWNLIGHT 150 OPAL

	K	CRI	2000lm		3000lm		3500lm	
			W	lm Output	W	lm Output	W	lm Output
BR	2700	90	19,8	1675	27,7	2227	-	-
		80	-	-	-	-	-	-
		90	19,8	1739	27,7	2312	-	-
		80	13,4	1488	19,9	2096	27,7	2788
4000	90	19,8	1874	27,7	2492	-	-	
	80	13,4	1550	19,9	2184	27,7	2904	
MA	2700	90	19,8	1606	27,7	2135	-	-
		80	-	-	-	-	-	-
		90	19,8	1667	27,7	2216	-	-
		80	13,4	1427	19,9	2010	27,7	2673
4000	90	19,8	1797	27,7	2389	-	-	
	80	13,4	1486	19,9	2094	27,7	2784	
WH	2700	90	19,8	1658	27,7	2203	-	-
		80	-	-	-	-	-	-
		90	19,8	1720	27,7	2288	-	-
		80	13,4	1473	19,9	2074	27,7	2759
4000	90	19,8	1854	27,7	2466	-	-	
	80	13,4	1534	19,9	2161	27,7	2874	

## KOMBIC DOWNLIGHT 150 OPTIC

	K	CRI	2000lm		3000lm		3500lm	
			W	lm Output	W	lm Output	W	lm Output
BK	2700	90	19,8	1289	27,7	1713	-	-
		80	-	-	-	-	-	-
		90	19,8	1338	27,7	1779	-	-
		80	13,4	1145	19,9	1613	27,7	2145
4000	90	19,8	1442	27,7	1917	-	-	
	80	13,4	1193	19,9	1680	27,7	2235	
MA	2700	90	19,8	1293	27,7	1718	-	-
		80	-	-	-	-	-	-
		90	19,8	1342	27,7	1784	-	-
		80	13,4	1148	19,9	1618	27,7	2151
4000	90	19,8	1446	27,7	1923	-	-	
	80	13,4	1196	19,9	1685	27,7	2241	
WH	2700	90	19,8	1332	27,7	1771	-	-
		80	-	-	-	-	-	-
		90	19,8	1383	27,7	1838	-	-
		80	13,4	1184	19,9	1677	27,7	2217
4000	90	19,8	1490	27,7	1982	-	-	
	80	13,4	1233	19,9	1737	27,7	2310	

## KOMBIC DOWNLIGHT 150 RF

	K	CRI	2000lm		3000lm		3500lm	
			W	lm Output	W	lm Output	W	lm Output
BK	2700	90	12	1992	17	2622	-	-
		80	-	-	-	-	-	-
		90	12	2089	17	2749	-	-
		80	12	1835	17	2448	25	3223
4000	90	12	2225	17	2929	-	-	
	80	12	1927	17	2570	25	3383	
MA	2700	90	12	1945	17	2560	-	-
		80	-	-	-	-	-	-
		90	12	2039	17	2684	-	-
		80	12	1792	17	2390	25	3146
4000	90	12	2172	17	2929	-	-	
	80	12	1881	17	2509	25	3146	
WH	2700	90	12	1945	17	2622	-	-
		80	-	-	-	-	-	-
		90	12	2039	17	2749	-	-
		80	12	1792	17	2390	25	3146
4000	90	12	2172	17	2929	-	-	
	80	12	1881	17	2509	25	3146	

,166

**B:** Black 02: ● RAL 9011 BLACK MATE  
**W:** White 02: ○ RAL 9010 WHITE MATE

71,,12507,21




48,757,,76




# Kombic 150 Downlight

Opal


**PHOTOMETRIC DATA:**

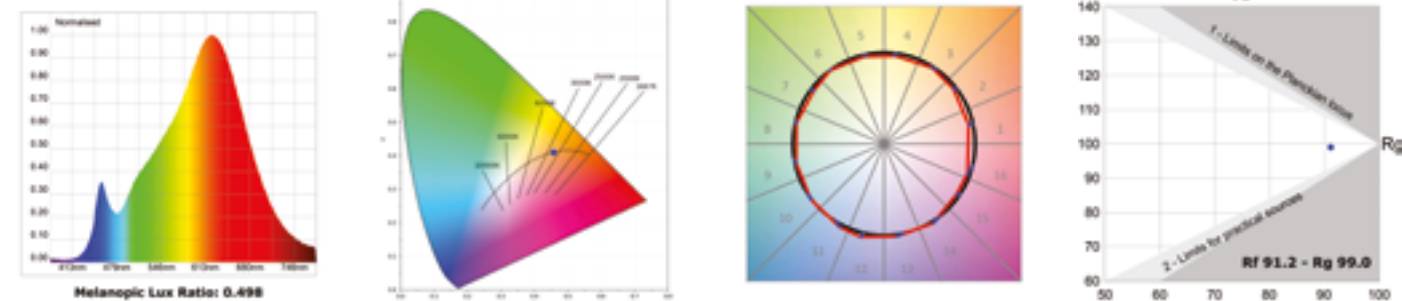


WFL 50°

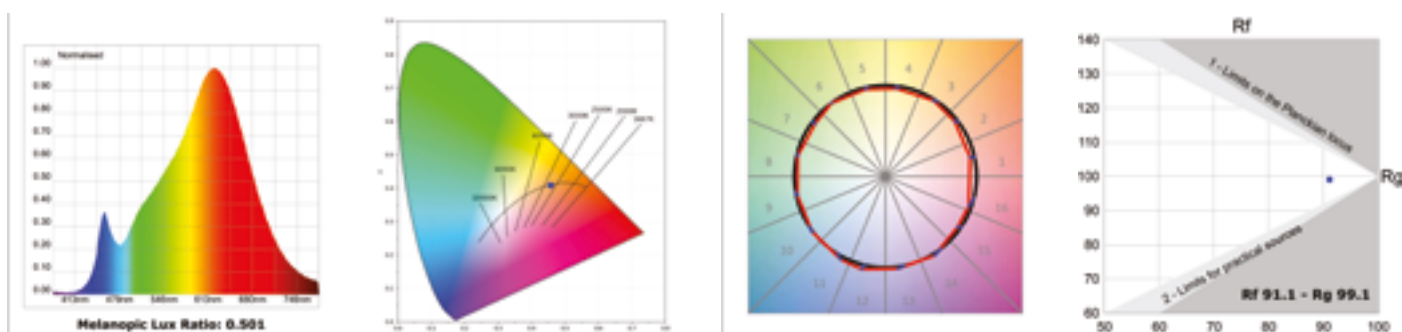

RF

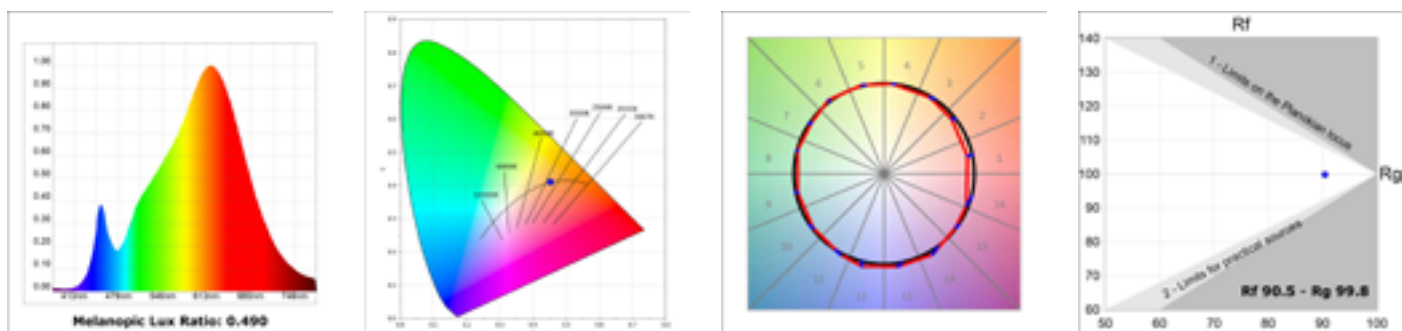


RW

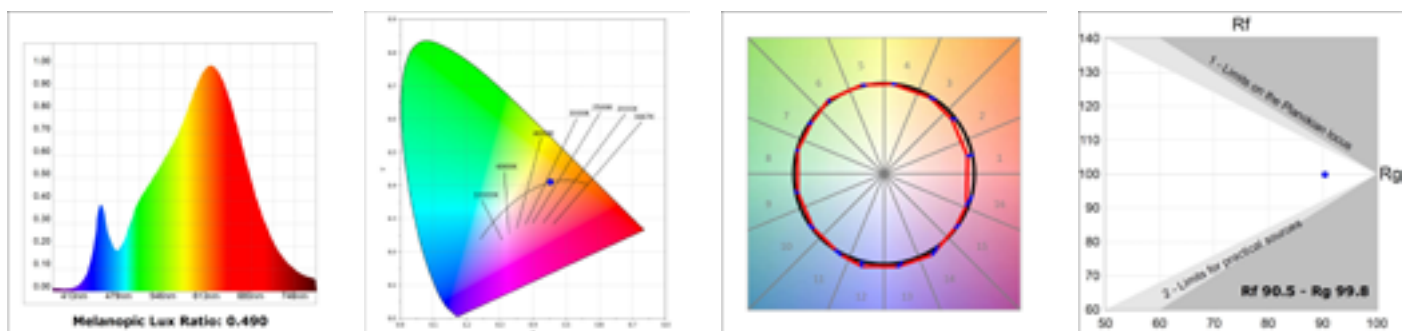

# Kombic 150 Downlight

## PHOTOMETRIC DATA


Opal

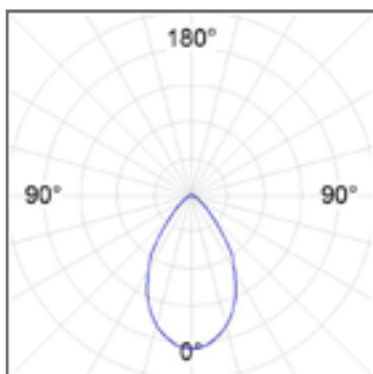

η = 100%  
 I<sub>max</sub> = 833 cd/klm  
 UTE: 1,00B  
 CIE: 79 96 99 100 100




WFL 50°

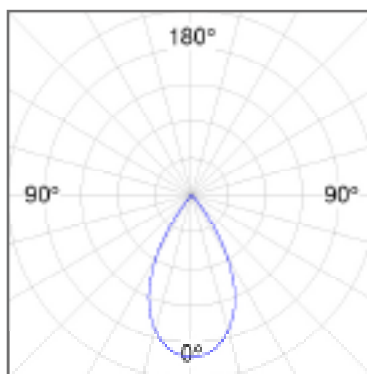

η = 100%  
 I<sub>max</sub> = 1327 cd/klm  
 UTE:  
 CIE: 99 100 100 100 100




RF

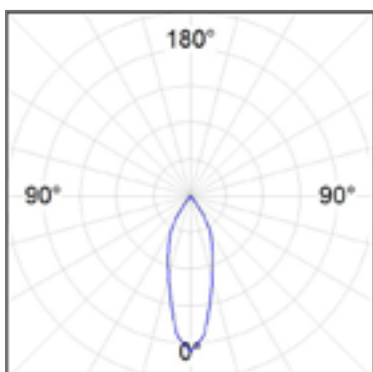

η = 100%  
 I<sub>max</sub> = 2122 cd/klm  
 UTE:  
 CIE: 100 100 100 100 100



RW

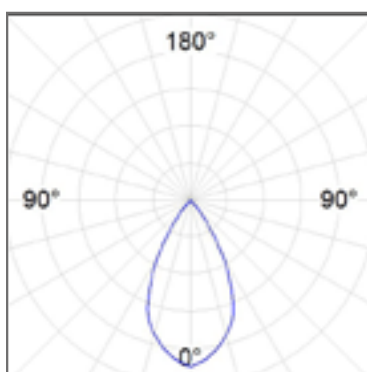

η = 100%  
 I<sub>max</sub> = 1345 cd/klm  
 UTE:  
 CIE: 99 100 100 100 100

