


Kombic 150 Downlight

KOMBIC 150 Downlight



DESCRIPTION:

KOMBIC 150 recessed downlight of 2000 or 3500 lm from Lamp brand. Die-cast aluminium heat sink. Models with opal or optical diffuser for greater visual comfort (reaching UGR <17 in some models) COB LED of 2700 K, 3000 K or 4000 K, with CRI of 80 or 90. On / Off or Dali with the possibility of control via bluetooth LE. With IP40 degree of protection. Isolation class I. Photobiological safety group 0.

Available finishes:

- Opal model: Bright, metalized matt or white interior reflector and white exterior finishing.
- Optic model: Black interior reflector and black or white exterior finishing, or interior reflector in metalized matt or white and white exterior finishing.

Dimensions: diameter 150 mm

Weight: 704 g

INSTALLATION: Recessed

KOMBIC 150 DOWNLIGHT OPAL

Family	Installation	Lm LED	IP	Optic	CRI	K	Gear	Reflector Finishes	Ext. Finishes
K21	RD Round	20 2000lm	40 IP 40	OP Opal	9 90	27 2700 K	N ON/OFF D DALI	R Bright M Metalized Matt W White	W White 02
		30 3000lm				30 3000 K			
		40 4000 K				40 4000 K			
		20 2000lm			8 80	30 3000 K			
		30 3000lm				40 4000 K			
		35 3500lm							

Code configurator:

KOMBIC 150 DOWNLIGHT OPTIC

Family	Installation	Lm LED	IP	Optic	CRI	K	Gear	Reflector Finishes	Ext. Finishes
K21	RD Round	20 2000lm	40 IP 40	WF WFL 50°	9 90	27 2700 K	N ON/OFF D DALI	B Black	B Black 02 W White 02
		30 3000lm				30 3000 K			
		40 4000 K				40 4000 K			
		20 2000lm			8 80	30 3000 K		M Metalized Matt W White	W White 02
		30 3000lm				40 4000 K			
		35 3500lm							

Code configurator:

LIGHT OUTPUT AND POWER

KOMBIC 150 DOWNLIGHT OPAL

			2000lm		3000lm		3500lm	
			K	CRI	W	lm Output	W	lm Output
BR	2700	90	19,8	1675	27,7	2227	-	-
		80	-	-	-	-	-	-
	3000	90	19,8	1739	27,7	2312	-	-
		80	13,4	1488	19,9	2096	27,7	2788
MA	4000	90	19,8	1874	27,7	2492	-	-
		80	13,4	1550	19,9	2184	27,7	2904
	2700	90	19,8	1606	27,7	2135	-	-
		80	-	-	-	-	-	-
WH	3000	90	19,8	1667	27,7	2216	-	-
		80	13,4	1427	19,9	2010	27,7	2673
	4000	90	19,8	1797	27,7	2389	-	-
		80	13,4	1486	19,9	2094	27,7	2784

KOMBIC 150 DOWNLIGHT OPTIC

			2000lm		3000lm		3500lm	
			K	CRI	W	lm Output	W	lm Output
BK	2700	90	19,8	1289	27,7	1713	-	-
		80	-	-	-	-	-	-
	3000	90	19,8	1338	27,7	1779	-	-
		80	13,4	1145	19,9	1613	27,7	2145
MA	4000	90	19,8	1442	27,7	1917	-	-
		80	13,4	1193	19,9	1680	27,7	2235
	2700	90	19,8	1293	27,7	1718	-	-
		80	-	-	-	-	-	-
WH	3000	90	19,8	1342	27,7	1784	-	-
		80	13,4	1148	19,9	1618	27,7	2151
	4000	90	19,8	1446	27,7	1923	-	-
		80	13,4	1196	19,9	1685	27,7	2241

Kombic 150 Downlight

FINISHES:

B: Black 02: ● RAL 9011 BLACK MATE

W: White 02: ○ RAL 9010 WHITE MATE

TECHNICAL SPECIFICATIONS:







QUALITY CERTIFICATES:







PHOTOMETRIC DATA :


Opal




WFL 50°




Opal

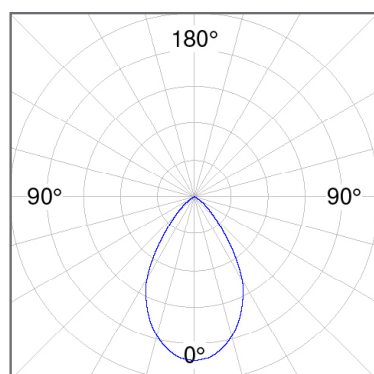

$\eta = 100\%$
 $I_{max} = 893 \text{ cd/klm}$
 UTE: 1,00A
 CIE: 84 99 100 100 100



WFL 50°

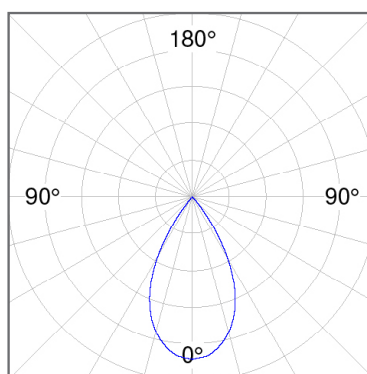

$\eta = 100\%$
 $I_{max} = 1327 \text{ cd/klm}$
 UTE:
 CIE: 99 100 100 100 100

