
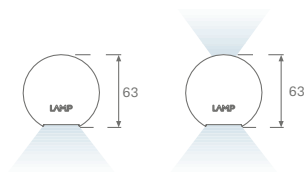


Lamptub 60

Lamptub 60



DESCRIPTION:

"Lamptub 60 surface or pendant luminaire in 840, 1120 and 1680 mm lengths from Lamp. Direct or direct-indirect light distribution options. Available in two luminous flux versions (MO: 3000 lm per metre and LO: 1500 lm per metre). Models with tech, opal or opal comfort diffuser consisting of a translucent polycarbonate diffuser and optical sheet for lower glare and light distribution control UGR19. Maximum visual comfort versions in low luminous flux models (LO versions) UGR<15. Made of recycled aluminium extrusion with 60mm circular section. Available in several colour temperatures (2700, 3000 and 4000K) and dynamic white (2700-6500K) available in LED technology with CRI of 90. Dali or OnOff electronic wiring, with the possibility of control via Bluetooth LE. Degree of protection IP20, IK07. Insulation class I/II. Group 0 photobiological safety. Compatible with Lamp Nomadic system.

Available finishes:

- White (RAL 9010), Black (RAL 9011), Wellbeing Palette and BeSocial."

Dimensions: 60mm

Lengths: 840, 1120, 1680 mm

Weight: 2110 - 4010 g

INSTALLATION: Surface or track suspended (compatible with Nomadic system), or suspended with recessed or surface-mounted trim.

LAMPTUB 60 SUSPENDED DIRECT

Family	Installation	Rose	Format	Lm LED/m	Optic	CRI	K	Gear	Finishes
L61	S	Suspended	E Recessed	084 840mm	LO 1500lm	9	90	N ON/OFF	W White
			S Surface	112 1120mm	MO 3000lm				B Black
				168 1680mm	OC Opal Comfort				3 Wellbeing
								4 Be Social	
L61	S	Suspended	E Recessed	084 840mm	MO 2600lm	9	90	N ON/OFF	W White
			S Surface	112 1120mm	TE Tech				B Black
				168 1680mm					3 Wellbeing
								4 Be Social	
L61	S	Suspended	E Recessed	084 840mm	LO 1500lm	9	90	D DALI	W White
			S Surface	112 1120mm	OC Opal Comfort				B Black
				168 1680mm					3 Wellbeing
								4 Be Social	
L61	S		E	084	LO	9	27	N	W

Code configurator:

LAMPTUB 60 SUSPENDED DIR/IND

Family	Installation	Rose	Format	Lm LED/m	Optic	CRI	K	Gear	Finishes
L61	S	Suspended	E Recessed	084 840mm	LO 1500lm	9	90	N ON/OFF	W White
				112 1120mm	IO Dir/Ind Opal				B Black
				168 1680mm	IP Dir/Ind Opal Comfort				3 Wellbeing
								4 Be Social	
L61	S	Suspended	E Recessed	084 840mm	LO 1500lm	9	90	D DALI	W White
				112 1120mm	IP Dir/Ind Opal Comfort				B Black
				168 1680mm					3 Wellbeing
								4 Be Social	
L61	S		E	084	LO	9	27	N	W

Code configurator:

Lamptub 60

LAMPTUB 60 TRACK DIRECT

Family	Installation	Format	Lm LED/m	Optic	CRI	K	Gear	Finishes
L61	TK Track Surface	084 840mm	LO 1500lm	OP Opal	9 90	27 2700 K 30 3000 K 40 4000 K	N ON/OFF D DALI	W White
	ST Track Suspended	112 1120mm	MO 3000lm	OC Opal Comfort				B Black
		168 1680mm						3 Wellbeing 4 Be Social
L61	TK Track Surface	084 840mm	MO 2600lm	TE Tech	9 90	30 3000 K 40 4000 K	N ON/OFF D DALI	W White
	ST Track Suspended	112 1120mm						B Black
		168 1680mm						3 Wellbeing 4 Be Social
L61	TK	084	LO	OP	9	27	N	W

Code configurator:

LAMPTUB 60 SUSPENDED DIRECT

Family	Installation	Format	Lm LED/m	Optic	CRI	K	Gear	Finishes
L61	ST Track Suspended	084 840mm	LO 1500lm	IO Dir/Ind Opal	9 90	27 2700 K 30 3000 K 40 4000 K	N ON/OFF D DALI	W White
		112 1120mm	MO 3000lm	IP Dir/ Ind Opal Comfort				B Black
		168 1680mm						3 Wellbeing 4 Be Social

Code configurator:

LIGHT OUTPUT AND POWER

LAMPTUB 60 DIRECT

		K	CRI	840mm		1120mm		1680mm	
				W	lm Output	W	lm Output	W	lm Output
LO	OP	2700	90	10	717	12	955	17	1433
		3000	90	10	754	12	1005	17	1508
		4000	90	10	778	12	1038	17	1557
	OC	2700	90	10	663	12	884	17	1327
		3000	90	10	698	12	931	17	1396
		4000	90	10	720	12	961	17	1441
MO	OP	2700	90	17	1468	25	1957	34	2936
		3000	90	17	1545	25	2060	34	3089
		4000	90	17	1594	25	2126	34	3189
	OC	2700	90	17	1359	25	1912	34	2717
		3000	90	17	1430	25	1906	34	2860
		4000	90	17	1476	25	1968	34	2951
TE	2700	-	-	-	-	-	-	-	
	3000	90	11	1260	14	1680	22	2520	
	4000	90	11	1320	14	1760	22	2640	

LAMPTUB 60 DIRECT INDIRECT

		K	CRI	840mm		1120mm		1680mm	
				W	lm Output	W	lm Output	W	lm Output
LO	IO	2700	90	10	600	10	840	17	1320
				10	717	12	955	17	1433
				3000	90	10	632	11	884
	IP	2700	90	10	599	11	840	17	1319
				10	663	12	884	34	1327
				3000	90	10	630	10	883
MO	IO	2700	90	10	600	11	841	17	1321
				17	1468	25	1957	34	2936
				3000	90	10	632	11	884
	IP	2700	90	10	652	11	913	17	1434
				17	1594	25	2126	34	3189
				3000	90	10	631	11	884
MO	IO	2700	90	10	600	11	839	17	1320
				17	1359	25	1812	34	2717
				3000	90	10	631	11	884
	IP	2700	90	10	631	11	884	17	1388
				17	1430	25	1906	34	2860
				4000	90	10	651	11	912
				17	1476	25	1968	34	2951

FINISHES:

B: Black 02: ● RAL 9011 BLACK MATE

W: White 02: ○ RAL 9010 WHITE MATE

3: Wellbeing : ● 4050-R90B ○ 1505-Y10R ● 7024 ● 4030 ● 7001

4: Be Social : ● 4050-R90B ● 1050-B10G ● 7502-R ● 2070-Y80R ● 2011

TECHNICAL SPECIFICATIONS:




QUALITY CERTIFICATES:




Lamptub 60

PHOTOMETRIC DATA :

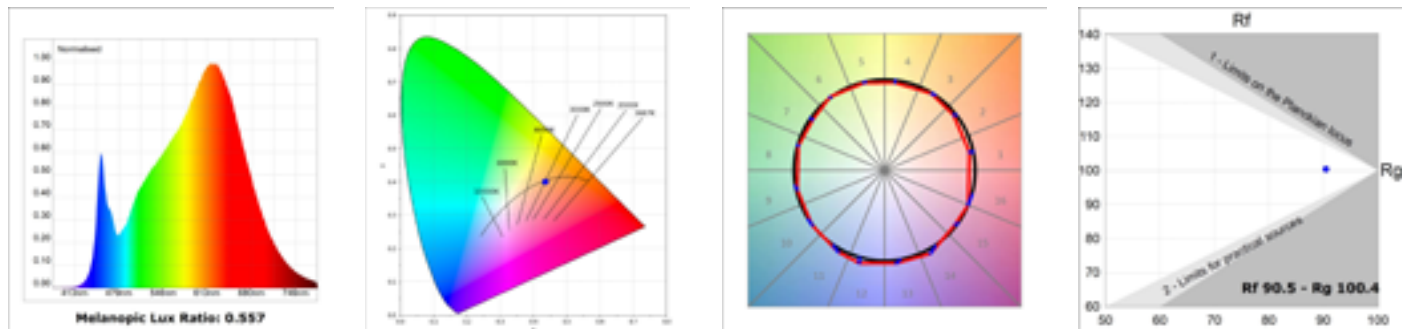


PHOTOMETRIC DATA :


OP

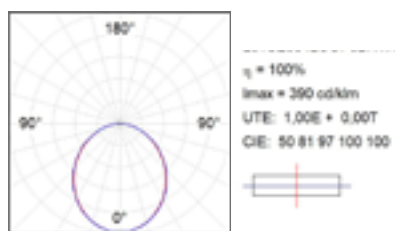


OC

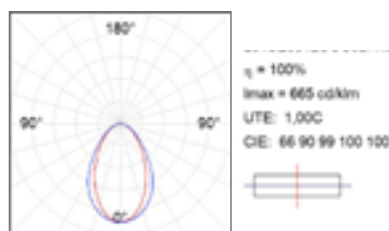


IO

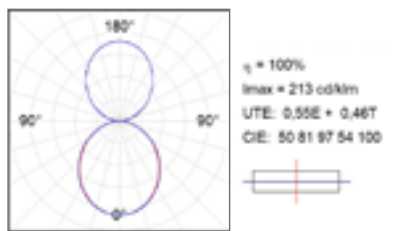

IP

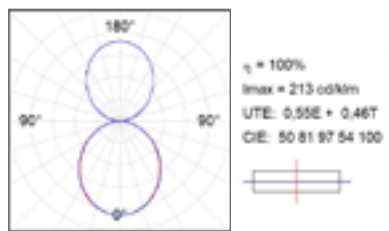

TE

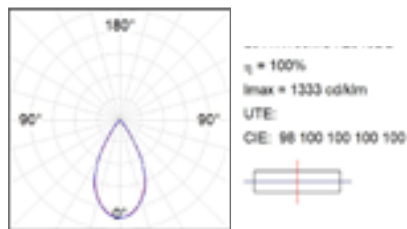

Lamptub 60

ACCESSORIES:



Product Code:

L6SUECB
L6SUECW
L6SUECW3
L6SUECW4

Description:

LTUB60 ACC. SUR END COVER BK.
LTUB60 ACC. SUR END COVER WH.
LTUB60 ACC. SUR END COVER WE.
LTUB60 ACC. SUR END COVER BS.