


Kombic 100 Surface

KOMBIC 100 Surface



DESCRIPTION:

Downlight to be fixed or suspended to the ceiling or with rail adapter, compatible with NOMADIC SYSTEM model KOMBIC 100 of 1500 or 2500 lm of Lamp brand. Die-cast aluminium dissipater. Models with opal diffuser, optics for maximum visual comfort (UGR<17 depending on model) or reflector with two Flood (32°) and Wide Flood (60°) apertures, combining visual comfort with high efficiency (up to 107 lm/W - UGR<19). COB LEDs in 2700 K, 3000 K or 4000 K, with CRI of 80 and 90. On/Off or Dali control gear with the possibility of control via Bluetooth LE. With IP40 degree of protection. Insulation class I. Group 0 photobiological safety.

Available finishes:

- Opal model: interior reflector in white, matt and gloss metallic and black or white exterior finish.
- Optic model: Black interior reflector and black or white exterior finish, or matt or white metallised interior reflector and black or white exterior finish.
- Matt metallic or white and black or white exterior finish.
- Reflector Model: inner reflector in black and black or white outer finish, or inner reflector in matt metallised or white and black or white outer finish.

Dimensions: diameter 99 mm.

Weight: 392 g

INSTALLATION: Surface mounted or surface mounted to ceiling or track compatible with Nomadic System.

KOMBIC 100 SURFACE OPAL

Family	Installation	Lm LED	IP	Optic	CRI	K	Gear	Reflector Finishes	Ext. Finishes
K11	SF Surface	15 1500lm	40 IP 40	OP Opal	9 90	27 2700 K	N ON/OFF D DALI	R Bright M Metalized Matt W White	W White 02
		20 2000lm				30 3000 K			
		40 4000 K							
		20 2000lm				30 3000 K			
		25 2500lm				40 4000 K			

Code configurator:

KOMBIC 100 SURFACE OPTIC

Family	Installation	Lm LED	IP	Optic	CRI	K	Gear	Reflector Finishes	Ext. Finishes
K11	SF Surface	15 1500lm	40 IP 40	WF WFL 50°	9 90	27 2700 K	N ON/OFF D DALI	B Black M Metalized Matt W White	B Black 02 W White 02
		20 2000lm				30 3000 K			
		40 4000 K							
		20 2000lm				30 3000 K			
		25 2500lm				40 4000 K			

Code configurator:

KOMBIC 100 SURFACE REFLECTOR

Family	Installation	Lm LED	IP	Optic	CRI	K	Gear	Reflector Finishes	Ext. Finishes
K11	SF Surface	15 1500lm	40 IP 40	RF Flood RW Wide Flood	9 90	27 2700 K	N ON/OFF D DALI	B Black M Metalized Matt W White	B Black 02 W White 02
		20 2000lm				30 3000 K			
		40 4000 K							
		20 2000lm				30 3000 K			
		25 2500lm				40 4000 K			

Code configurator:

Kombic 100 Surface

LIGHT OUTPUT AND POWER

KOMBIC 100 SURFACE OPAL

	K	CRI	1500lm		2000lm		2500lm	
			W	lm Output	W	lm Output	W	lm Output
BR	2700	90 80	13 -	1191 -	19 13	1598 -	19 19	- -
	3000	90 80	13 -	1230 -	19 13	1648 1460	19 19	- 1959
	4000	90 80	13 -	1336 -	19 13	1892 1547	19 19	- 2075
MA	2700	90 80	13 -	1135 -	19 13	1523 -	19 19	- -
	3000	90 80	13 -	1172 -	19 13	1571 1392	19 19	- 1867
	4000	90 80	13 -	1273 -	19 13	1708 1474	19 19	- 1978
WH	2700	90 80	13 -	1186 -	19 13	1591 -	19 19	- -
	3000	90 80	13 -	1125 -	19 13	1642 1454	19 19	- 1951
	4000	90 80	13 -	1330 -	19 13	1785 1541	19 19	- 2067

KOMBIC 100 SURFACE OPTIC

	K	CRI	1500lm		2000lm		2500lm	
			W	lm Output	W	lm Output	W	lm Output
BK	2700	90 80	13 -	983 -	19 -	1312 -	- -	- -
	3000	90 80	13 -	1015 -	19 14	1354 1205	- 20	- 1609
	4000	90 80	13 -	1102 -	14 14	1472 1277	- 20	- 1704
MA	2700	90 80	13 -	1030 -	19 -	1380 -	- -	- -
	3000	90 80	13 -	1068 -	19 14	1424 1268	- 20	- 1692
	4000	90 80	13 -	1160 -	14 14	1548 1343	- 20	- 1792
WH	2700	90 80	13 -	1040 -	19 -	1387 -	- -	- -
	3000	90 80	13 -	1074 -	19 14	1432 1275	- 20	- 1701
	4000	90 80	13 -	1166 -	14 14	1556 1351	- 20	- 1802

KOMBIC 100 SURFACE REFLECTOR WF

	K	CRI	1500lm		2000lm		2500lm	
			W	lm Output	W	lm Output	W	lm Output
BK	2700	90 80	13 -	1168 -	19 -	1568 -	- -	- -
	3000	90 80	13 -	1218 -	19 13	1636 1421	- 19	- 1908
	4000	90 80	13 -	1299 -	19 13	1744 1491	- 19	- 2002
MA	2700	90 80	13 -	1264 -	19 -	1710 -	- -	- -
	3000	90 80	13 -	1318 -	19 13	1784 1538	- 19	- 2081
	4000	90 80	13 -	1406 -	19 13	1902 1614	- 19	- 2184
WH	2700	90 80	13 -	1264 -	19 -	1710 -	- -	- -
	3000	90 80	13 -	1318 -	19 13	1784 1538	- 19	- 2081
	4000	90 80	13 -	1406 -	19 13	1902 1614	- 19	- 2184

KOMBIC 100 SURFACE REFLECTOR FL

	K	CRI	1500lm		2000lm		2500lm	
			W	lm Output	W	lm Output	W	lm Output
BK	2700	90 80	13 -	983 -	19 -	1711 -	- -	- -
	3000	90 80	13 -	1015 -	19 13	1785 1549	- 19	- 2082
	4000	90 80	13 -	1102 -	19 13	1903 1226	- 19	- 2185
MA	2700	90 80	13 -	1030 -	19 -	1815 -	- -	- -
	3000	90 80	13 -	1068 -	19 13	1893 1612	- 19	- 2208
	4000	90 80	13 -	1160 -	19 13	2019 1692	- 19	- 2318
WH	2700	90 80	13 -	1040 -	19 -	1815 -	- -	- -
	3000	90 80	13 -	1074 -	19 13	1893 1612	- 19	- 2208
	4000	90 80	13 -	1166 -	19 13	2019 1692	- 19	- 2318

FINISHES:

B: Black 02: ● RAL 9011 BLACK MATE

W: White 02: ○ RAL 9010 WHITE MATE

TECHNICAL SPECIFICATIONS:




QUALITY CERTIFICATES:




Kombic 100 Surface

PHOTOMETRIC DATA :


Opal

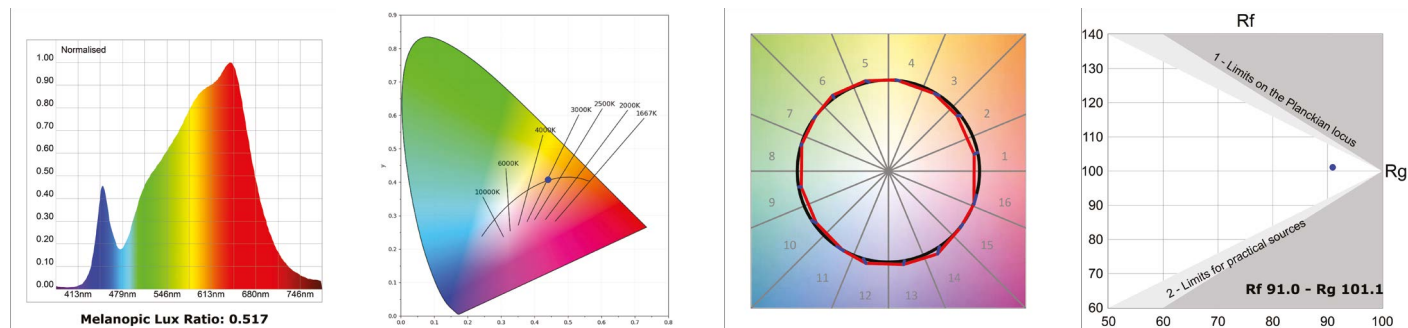

Optic

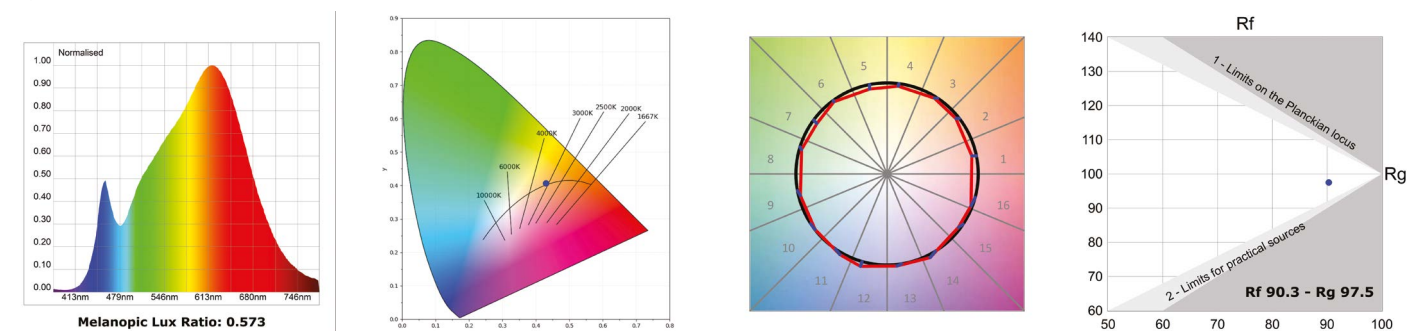


Reflector

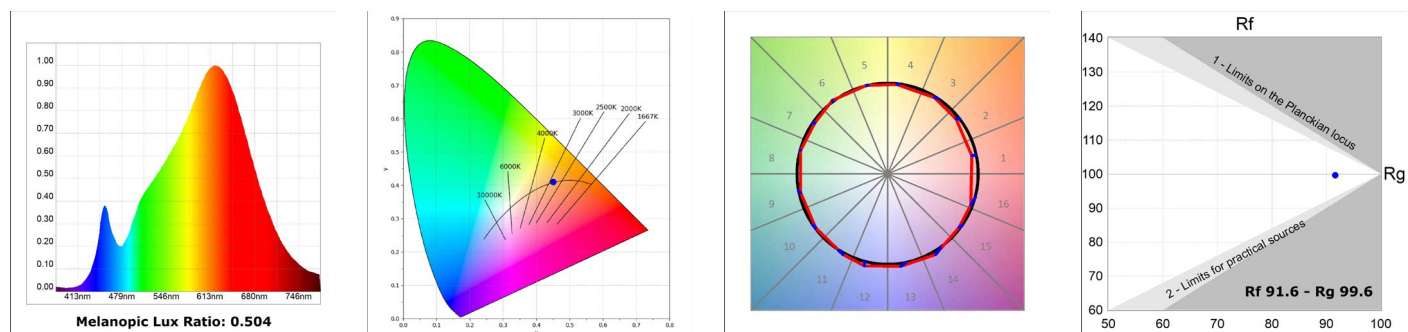


Kombic 100 Surface

PHOTOMETRIC DATA :


Opal

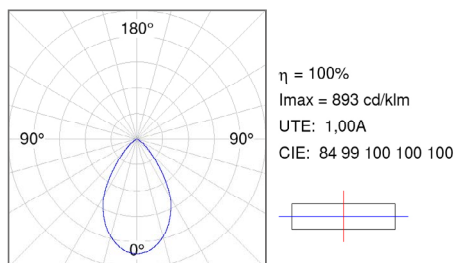


WFL 50°

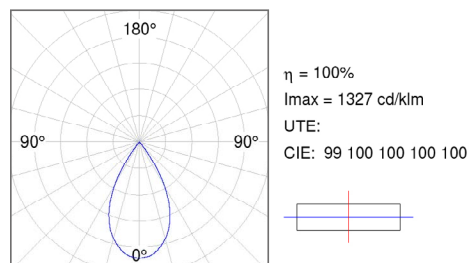

RF

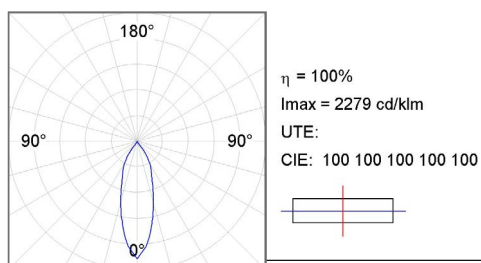

RW

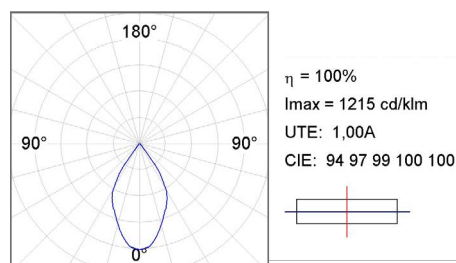

Kombic 100 Surface

ACCESSORIES:



Product Code:

K1SUCARG0500DB
K1SUCARG0500NB
K1SUCARG1000DB
K1SUCARG1000NB

Description:

KOMBIC 100 SF ACC ELEC 5P RIGI SUS 0.5 B
KOMBIC 100 SF ACC ELEC 3P RIGI SUS 0.5 B
KOMBIC 100 SF ACC ELEC 5P RIGI SUS 1M BK
KOMBIC 100 SF ACC ELEC 3P RIGI SUS 1M BK



Product Code:

K1SUCARG0500DW
K1SUCARG0500NW
K1SUCARG1000DW
K1SUCARG1000NW

Description:

KOMBIC 100 SF ACC ELEC 5P RIGI SUS 0.5 W
KOMBIC 100 SF ACC ELEC 3P RIGI SUS 0.5 W
KOMBIC 100 SF ACC ELEC 5P RIGI SUS 1M WH
KOMBIC 100 SF ACC ELEC 3P RIGI SUS 1M WH



Product Code:

K1SUCAWI2000DB
K1SUCAWI2000NB

Description:

KOMBIC 100 SF ACC. ELEC 5P SUSP 2M BK.
KOMBIC 100 SF ACC. ELEC 3P SUSP 2M BK.



Product Code:

K1SUCAWI2000DW
K1SUCAWI2000NW

Description:

KOMBIC 100 SF ACC. ELEC 5P SUSP 2M WH.
KOMBIC 100 SF ACC. ELEC 3P SUSP 2M WH.