

FIL 45

NOTA/NOTE: Al instalar la luminaria con el accesorio de suspensión, su grado de protección contra los agentes sólidos y el agua pasa a ser IP20. / When installing the luminaire with the suspension accessory, its degree of protection against solid agents and water becomes IP20.



● PULSERA ELECTROSTÁTICA ■ BRACELET ANTISTATIQUE ▲ DISPOSABLE WRIST STRAP

1

• La pulsera electrostática (ref: 9600990) está diseñada para evitar daños electrostáticos en productos electrónicos durante su manipulación.

■ Le bracelet antistatique (ref: 9600990) est conçu pour éviter des dommages électrostatiques des produits électroniques durant leur manipulation.

▲ The disposable wrist strap (ref:9600990) is an effective personel grounding device designed to prevent electrostatic damage to electronic products during handling


INSTRUCCIONES/ INSTRUCTIONS

1. Utilice pulsera antes de manipular montajes electrostáticos.
2. Introduzca su mano por el lazo de puño y ciña cómodamente alrededor de la muñeca.
3. Conecte la pinza a un sistema de tierra adecuado

1. Enfiler le bracelet antistatique Utilisez la dragonne du bracelet avant de manipuler des ensembles électroniques.

2. Insérez votre main dans la dragonne et serrez confortablement autour du poignet.
3. Connectez la pince crocodile à un système de terre correct

1. Use wrist strap before handling electrostatic assemblies.
2. Slip wrist loop over hand and cinch snugly around wrist
3. Attach alligator clip to suitable pround





REFLECTORS

OPAL

OPAL COMFORT

Glossy Surface




SUSPENDED



1

NOT INCLUDED



- 1
- 2
- 3
- 4

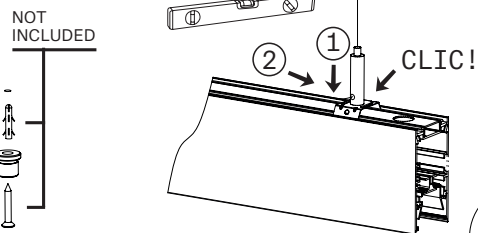

NOTA/NOTE: Al instalar la luminaria con el accesorio de suspensión, su grado de protección contra los agentes sólidos y el agua pasa a ser IP20. / When installing the luminaire with the suspension accessory, its degree of protection against solid agents and water becomes IP20



2 SINGLE LUMINAIRE

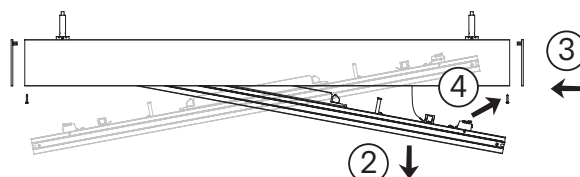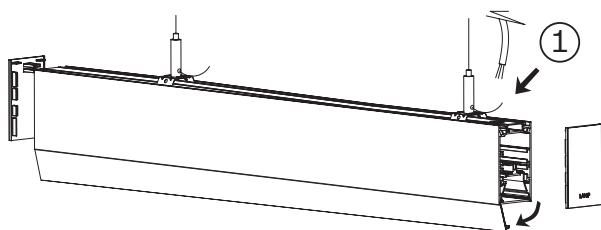

NO DIMMABLE
max. 2,5mm2




DALI
max. 2,5mm2





220V DALI

ANTITRACK
INCLUDED IN
CANOPY ACCESSORY




3 CONTINUOUS LINE LUMINAIRE

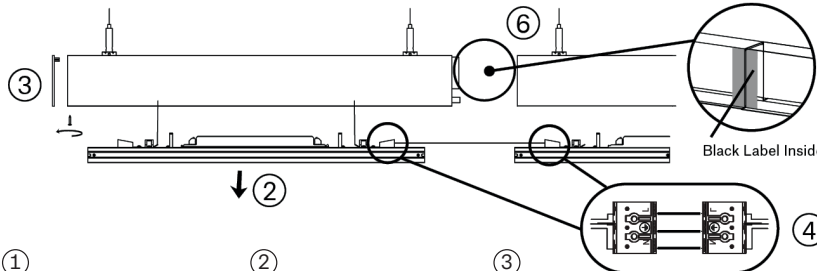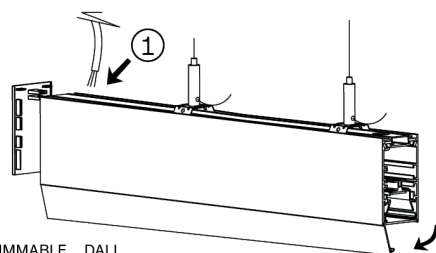

NO DIMMABLE
max. 2,5mm2




DALI
max. 2,5mm2



220V DALI


ANTITRACK
INCLUDED IN
CANOPY ACCESSORY



DESATORNILLAR
/ UNSCREW



ATORNILLAR
/ SCREW



ATORNILLAR
/ SCREW

NOT INCLUDED
REF.: F42JO



FIL 45

NOTA/NOTE: Al instalar la luminaria con el accesorio de suspensión, su grado de protección contra los agentes sólidos y el agua pasa a ser IP20. / When installing the luminaire with the suspension accessory, its degree of protection against solid agents and water becomes IP20.



SURFACE

1A

NOT INCLUDED
ø4,2 Recommended

X

x1 NOT INCLUDED
Ref: F4FX15G

L	X	QUANTITY
840mm	690mm	2 units
1120mm	970mm	2 units
1400mm	625mm	3 units
1680mm	765mm	3 units
1960mm	905mm	3 units
2240mm	1045mm	3 units

1B

NOT INCLUDED

ø5 max.

X

L	X	QUANTITY
840mm	740mm	2 units
1120mm	1020mm	2 units
1400mm	1300mm	2 units
1680mm	1580mm	2 units
1960mm	1860mm	2 units
2240mm	2140mm	2 units

2 SINGLE LUMINAIRE

CLIC!

NO DIMMABLE
max. 2,5mm2

DALI
max. 2,5mm2

220V DALI

ANTITRACK
INCLUDED IN
CANOPY ACCESSORY

Nº: 3

3 CONTINUOUS LINE LUMINAIRE

ANTITRACK
INCLUDED IN
CANOPY ACCESSORY

Nº: 3

NO DIMMABLE
max. 2,5mm2

DALI
max. 2,5mm2

220V DALI

DESATORNILLAR / UNSCREW

ATORNILLAR / SCREW

ATORNILLAR / SCREW

NOT INCLUDED
REF.: F42JO

FIL 45

NOTA/NOTE: Al instalar la luminaria con el accesorio de suspensión, su grado de protección contra los agentes sólidos y el agua pasa a ser IP20. / When installing the luminaire with the suspension accessory, its degree of protection against solid agents and water becomes IP20.



RECESSED

1

L	X	Y
840mm	L+6mm	51mm
1120mm	L+6mm	
1400mm	L+6mm	
1680mm	L+6mm	
1960mm	L+6mm	
2240mm	L+6mm	

2 SINGLE LUMINAIRE

3

4 CONTINUOUS LINE LUMINAIRE

NO DIMMABLE max. 2,5mm2

DALI max. 2,5mm2

220V DALI

ANTITRACK INCLUDED IN CANOPY ACCESSORY

Nº: 3

DESATORNILLAR / UNSCREW

ATORNILLAR / SCREW

ATORNILLAR / SCREW

NOT INCLUDED REF.: F42JO

CORNER

1

CURVE

1

ES: Este producto contiene una fuente luminosa de la clase de eficiencia energética:
EN: This product contains a light source of energy efficiency class:
FR: Ce produit est équipé d'une source lumineuse de classe d'efficacité énergétique:

CCT	CRI	EEC	CCT	CRI	EEC
3000K	80	C	3000K WB	97	F
4000K	80	C	4000K WB	97	F
3000K	90	D	TW	80	D
4000K	90	D	TW WB	97	F

El fabricante no asume las responsabilidades derivadas del uso y montaje incorrectos de sus productos.

The manufacturer is not responsible for the incorrect use and assembly of its products.

Le fabricant n'assume pas les responsabilités dérivées de l'emploi et du montage incorrects de ses produits.

Córdoba, 16, 08226 Terrassa, Spain
T. 93 736 68 00 - lamp@lamp.es
www.lamp.es