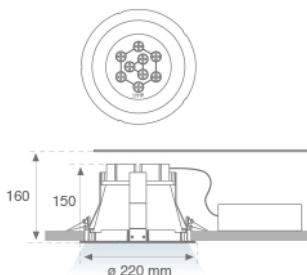


10041040

**DOMO 220 G2 4000 WW****Description:**

Round recessed DOMO 220 G2 4000 WW downlight, LAMP brand. With external ring in white lacquered die-cast aluminium. Model for MID-POWER LED, warm white colour temperature and control gear included. Reflector designed by the optical concept named REDIL® (Direct Emission LED Reflector), which consists of a two-phase reflection. Insulation class II.

Finish: Matte white RAL 9010


Weight: 1.508 g

Installation: Recessed
TECHNICAL SPECIFICATIONS:

Light output:	3.665 lm	°K :	3000
Plum:	40,5W	CRI :	80
Efficacy:	90,5 lm/w	MacAdam:	3
Type:	MID POWER NICHIA	Power Supply:	120-240V 50/60Hz
LED Lifetime:	50.000 L80 B10	Gear:	Electronic
Power:	37W		

Light output tolerance +/- 10%


PHOTOMETRIC DATA :

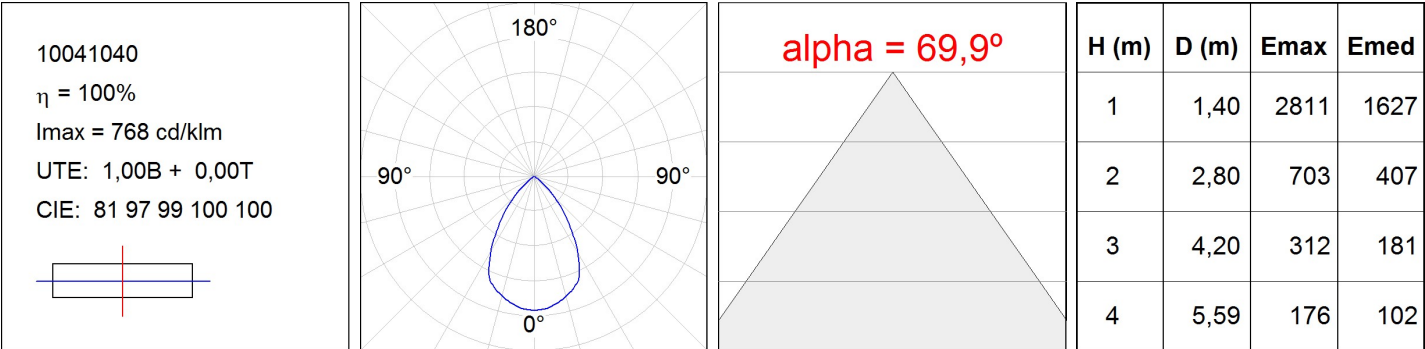

ACCESSORIES :

Optical

**Product code:**

8606120

8606123

Description:

DOMO 220 ACC. OPAL GLASS WH.

DOMO 220 ACC. OPAL GLASS GR.

**Product code:**

8606130

Description:

DOMO 220 G2 ACC. INT OPAL DIFFUSER

**Product code:**


8606140

8606143

Description:

DOMO 220/KOMBIC ACC. TRANSP GLASS WH.

DOMO 220/KOMBIC ACC. TRANSP GLASS GR.

**Product code:**

8606142

Description:

DOMO 220/KOMBIC ACC. TRANSP GLASS BK.

**Product code:**


9200210

9200213

Description:

DOMO 220/KOMBIC ACC. DECO RING WH.

DOMO 220/KOMBIC ACC. DECO RING GR.

**Product code:**

9200212

Description:

DOMO 220/KOMBIC ACC. DECO RING BK.

