


10540082

MUN LIGHT SUS Ø300 3000 NW GRH.

Description:

Round suspended downlight model MUN LIGHT SUS Ø300 3000 NW GRH., LAMP brand. Made of textured graphite painted extruded aluminum and with methacrylate opal diffuser. Model for LED MID-POWER with neutral white color temperature and control gear included. IP20 protection rating. Insulation class I.



Finish: Texturised matte graphite RAL 7021


Weight: 2.680 g

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	1.492 lm	°K :	4000
Plum:	26,2W	CRI :	80
Efficacy:	56,9 lm/w	MacAdam:	<3
Type:	MID POWER OSRAM	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10	Gear:	Electronic
Power:	22W		

Light output tolerance +/- 10%


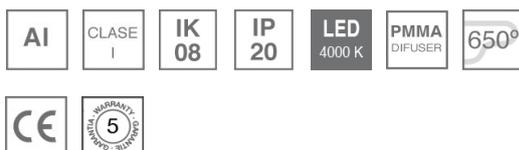


10540082

MUN LIGHT SUS Ø300 3000 NW GRH.

PHOTOMETRIC DATA :

10540082
 $\eta = 100\%$
 $I_{max} = 348 \text{ cd/klm}$
 UTE: 1,00E + 0,00T
 CIE: 47 79 96 100 100

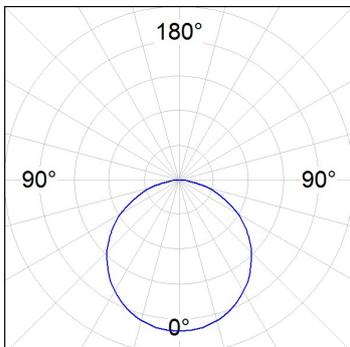H (m)	D (m)	E _{max}	E _{med}
1	3,05	518	152
2	6,10	130	38
3	9,15	58	17
4	12,20	32	10