


14741500



**FIL LED G2 OPAL REC 3000 WW WH.**

**Description:**

Recessed luminaire model FIL LED G2 OPAL REC 3000 WW WH., LAMP brand. Made of satin white painted extruded aluminium with opal polycarbonate diffuser. Model for MID-POWER LED, warm white colour temperature and control gear included. With opal polycarbonate diffuser. With a IP42, IK07 protection rating. Insulation class I. Photobiological safety group 0.



**Finish:** Matte white RAL 9010

**Dimensions:** 1.137 x 66 x 67 mm

**Weight:** 2.166 g


**Installation:** Recessed

**Recessing measures:** 1,147 x 52 x 80 mm

**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	1.900 lm	<b>°K :</b>	3000
<b>Plum:</b>	21,3W	<b>CRI :</b>	80
<b>Efficacy:</b>	89,2 lm/w	<b>MacAdam:</b>	3
<b>Type:</b>	MID POWER TRIDONIC	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50000 L80 B10	<b>Gear:</b>	Electronic
<b>Power:</b>	19W		

*Light output tolerance +/- 10%*

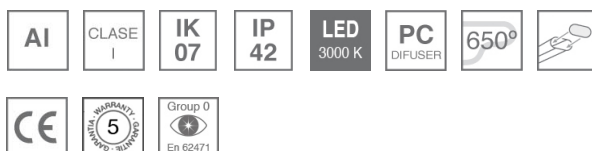
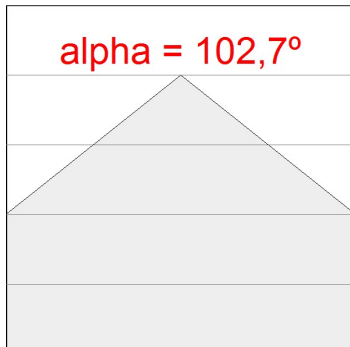
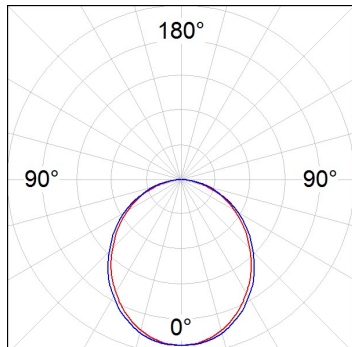


14741500

FIL LED G2 OPAL REC 3000 WW WH.

**PHOTOMETRIC DATA :**


14741500  
 $\eta = 100\%$   
 $I_{max} = 380 \text{ cd/klm}$   
 UTE: 1,00E + 0,00T  
 CIE: 49 80 96 100 100

H (m)	D (m)	E <sub>max</sub>	E <sub>med</sub>
1	2,50	721	258
2	5,00	180	64
3	7,50	80	29
4	10,00	45	16

**ACCESORIES :**

**Assembly**




**Product code:**

4700580  
4700583  
4705100  
4705103

**Description:**

FIL ACC. REC PROFILE X/MM WH.  
FIL ACC. REC PROFILE X/MM GR.  
FIL ACC. COVER X/MM WH.  
FIL ACC. COVER X/MM GR.




**Product code:**

4705210  
4705213

**Description:**

FIL ACC. REC 90° CORNER WH.  
FIL ACC. REC 90° CORNER GR.



**Product code:**

4706450  
4706453

**Description:**

FIL ACC. REC END COVER WH.  
FIL ACC. REC END COVER GR.



**Product code:**

9600990

**Description:**

ACC. ELECTROSTATICS WRIST STRAP



**Product code:**

9606010

**Description:**

ACC. INTM JOINT B

**ACCESORIES :**

**Optical**



**Product code:**

4700590

**Description:**

FIL ACC. OPAL DIFFUSER X/MM