Product datasheet

KOMBIC 200


9281380



KOMBIC 200 RD 4000 IP40 NW OPAL DA BR/WH

Description:

Round recessed downlight model KOMBIC 4000 NW, LAMP brand. Interior diffuser made of opal polycarbonate specially for LED, injection aluminium dissipator and torkit type easy-fit fastening system. Model for MID-POWER LED, with neutral white colour temperature and control gear included. IP44 protection rating. Insulation class II.



Finish: Shiny white RAL 9010

Weight: 976 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output: 2.944 lm °K: 4000 Plum: 25,4W CRI: 80

Efficacy: 115,9 lm/w

Type: MID POWER TRIDONIC MacAdam: 3

LED Lifetime: 50.000 L80 B10 Power Supply: 220-240V 50/60Hz 24W Gear: Power: Adjustable DALI

Light output tolerance +/- 10%


























KOMBIC 200





9281380

KOMBIC 200 RD 4000 IP40 NW OPAL DA BR/WH

PHOTOMETRIC DATA:





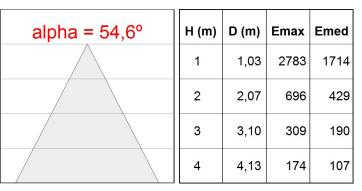

Product datasheet

KOMBIC 200



ACCESORIES:

Optical



Product code: Description:

8606140 8606143

DOMO 220/KOMBIC ACC.TRANSP GLASS WH. DOMO 220/KOMBIC ACC.TRANSP GLASS GR.



Product code:

8606142

Description:

DOMO 220/KOMBIC ACC.TRANSP GLASS BK.



Product code:

Description:

9200210 DOMO 220/KOMBIC ACC. DECO RING WH. DOMO 220/KOMBIC ACC. DECO RING GR. 9200213



Product code:

9200212

Description:

DOMO 220/KOMBIC ACC. DECO RING BK.



Product code:

Description:

9200220 KOMBIC ACC. Ø250 ADAPTER RING WH.