#### **Product datasheet**

# AMBIENT

## AM2060DI25OO830NW



47,5	-	591	
8			
57.5			

## AMBIENT G2 IND 600 D/I WW OP/OP WH

### **Description:**

LAMP surface wall mounted fixture AMBIENT G2 IND 600 D/I. Manufactured from extruded aluminum with an 75% recycling rate with Opal polycarbonate diffusers. Model for LED MID-POWER, colour temperature 3000K and IRC80. Electronic ON OFF gear included. IP40, IK07 ratings. Insulation Class I. Photobiological safety group 0. LED life time: >72.000 L80B10. Available luminaire body finishes: White and black. Frontal accessory sold separately with the desired finish. White, Black, Raw o Anodised (Gold, Bronze, Champagne, Blue and Black).

Finish:Matte white RAL 9010Dimensions:600 x 80 x 48 mm

Installation: Wall mounted

#### **TECHNICAL SPECIFICATIONS:**

Light output:	2.078 lm	⁰К :	3000
Plum:	18,6W	CRI :	80
Efficacy:	111,7 lm/w	MacAdam:	3
Туре:	MID POWER	Power Supply:	220-240V 50/60Hz
LED Lifetime:	>72.000 L80B10 (Ta=25ºC)	Gear:	Electronic
Power:	16W		

#### Light output tolerance +/- 10%



## CUSTOM MADE OPTIONS:




LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es Worktitude for light

# AMBIENT

AM2060DI25OO830NW

AMBIENT G2 IND 600 D/I WW OP/OP WH



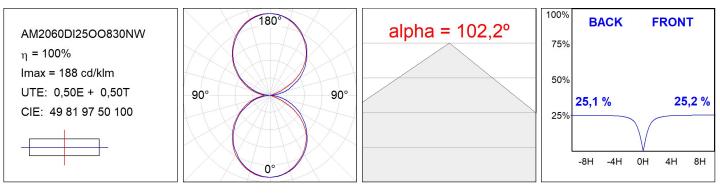

Worktitude for light

#### Product datasheet

## AMBIENT

### ACCESORIES :

#### Assembly



Product code: AM2ACIN060ABK

Description: AMBIENT G2 ACC FRONT IND 600 AN. BLACK

Product code:

AM2ACIN060ABL

Description: AMBIENT G2 ACC FRONT IND 600 AN. BLUE



Product code: AM2ACIN060ABZ





Product code: AM2ACIN060ACH

Description: AMBIENT G2 ACC FRONT IND 600 AN. CHAMP



Product code: AM2ACIN060AGD





Product code: AM2ACIN060ARW

Description: AMBIENT G2 ACC FRONT IND 600 AL RAW



Product code: AM2ACIN060B





Product code: AM2ACIN060W

Description: AMBIENT G2 ACC FRONT IND 600MM WH

Data according to regulations 2019/2020/EU and 2019/2015/EU