Product datasheet

BAULINE


BA3RE127MOSP840NG



BAULINE G3 REC 1268MM 5000 NW SP AND

Description:

Outdoor recessed structure model BAULINE G3 REC 1268MM 5000 NW SP, LAMP brand. Made of silver anodized aluminum extrusion and end covers of aluminum injection lacquered in silver grey polyester, with AISI304 stainless steel frame and serigraphed tempered glass. Model for LED HI-POWER, 4000K colour temperature, CRI 80 and control gear included. With Spot optics. IP67, IK10 protection rating. Insulation class I. Lifetime: 83.000 L90 B10



Finish:Anodized matte silverDimensions:1.268 x 80 x 100 mm

Weight: 5.510 g

Installation: Floor recessed

Recessing measures: 1,272 x 72 x 107 mm

TECHNICAL SPECIFICATIONS:

Light output:	3.921 lm	⁰K :	4000
Plum:	32,3W	CRI :	80
Efficacy:	121,4 Im/w	MacAdam:	3
Туре:	HIGH POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	83.000 L90 B10 (Ta=25⁰C)	Gear:	Electronic
Power:	30,8W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:




LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es Worktitude for light

BAULINE

BA3RE127MOSP840NG

BAULINE G3 REC 1268MM 5000 NW SP AND



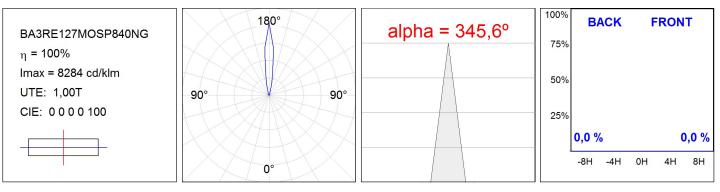

Worktitude for light

Product datasheet

BAULINE

ACCESORIES :

Assembly



Product code: BUREBO0683

Description: BAULINE ACC. REC BOX 683



Product code: BUREBO1272

Description: BAULINE ACC. REC BOX 1272 Worktitude for light