

DO2RD40AS830DW




DOMO 220 G2 ASYM 4000 WW DALI

Description:

Round recessed DOMO 220 G2 ASYM 4000 downlight, LAMP brand. With external ring in white lacquered die-cast aluminium and with polycarbonate opal diffuser. Model for MID-POWER LED, 3000K colour temperature and control DALI gear included. Lower asymmetric reflector in high purity aluminium. Insulation class II. Lifetime: 50.000 L90 B10

Finish: Matte white RAL 9010

Weight: 1.616 g

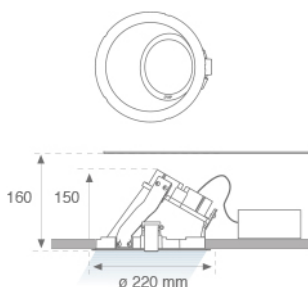


Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	2.737 lm	°K :	3000
Plum:	40,5W	CRI :	80
Efficacy:	67,6 lm/w	MacAdam:	3
Type:	MID POWER LED	Power Supply:	120-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	37W		

Light output tolerance +/- 10%

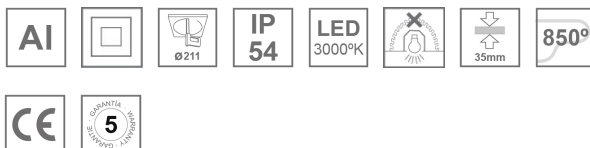



CUSTOM MADE OPTIONS:




PHOTOMETRIC DATA :

10041150
 $\eta = 100\%$
 $I_{max} = 582 \text{ cd/klm}$
UTE: 1,00C + 0,00T
CIE: 65 93 99 100 100

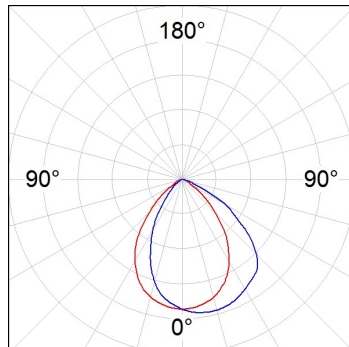

ACCESORIES :


Optical



Product code: DITRRD240B
Description: DOMO 220/KOMBIC ACC.TRANSF GLASS BK.



Product code: DITRRD240G
Description: DOMO 220/KOMBIC ACC.TRANSF GLASS GR.
DITRRD240W
Description: DOMO 220/KOMBIC ACC.TRANSF GLASS WH.



Product code: RIRD240B
Description: DOMO 220/KOMBIC ACC. DECO RING BK.



Product code: RIRD240G
Description: DOMO 220/KOMBIC ACC. DECO RING GR.
RIRD240W
Description: DOMO 220/KOMBIC ACC. DECO RING WH.