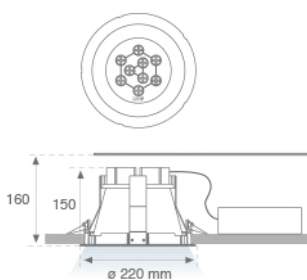


DO2RD40SY830DW

**DOMO 220 G2 4000 WW DALI****Description:**


Round recessed DOMO 220 G2 4000 downlight, LAMP brand. With external ring in white lacquered die-cast aluminium. Model for MID-POWER LED, 3000K colour temperature and control DALI gear included. Reflector designed by the optical concept named REDIL (Direct Emission LED Reflector), which consists of a two-phase reflection. Insulation class II. Lifetime: 50.000 L90 B10

Finish: Matte white RAL 9010**Weight:** 1.508 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

Light output:	3.665 lm	°K :	3000
Plum:	40,5W	CRI :	80
Efficacy:	90,5 lm/w	MacAdam:	3
Type:	MID POWER LED	Power Supply:	120-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	37W		

Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

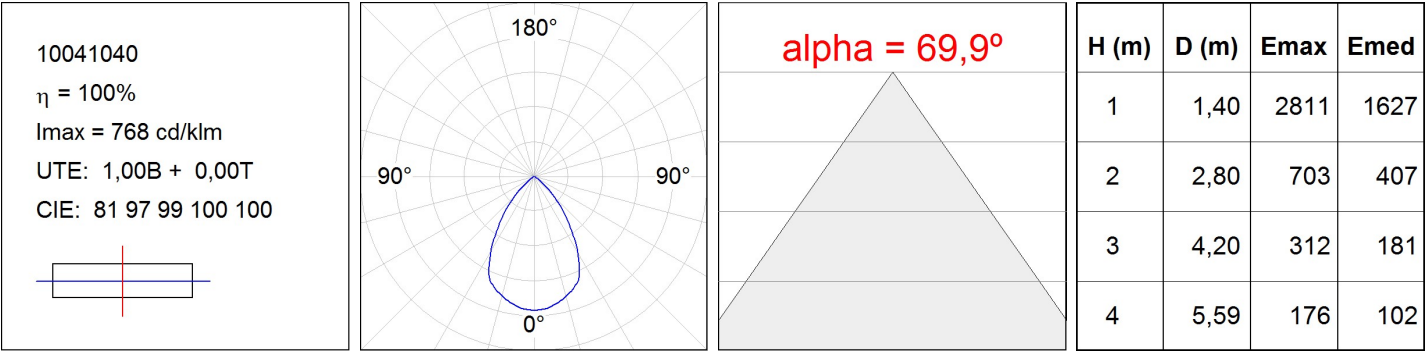

ACCESSORIES :

Optical



Product code:

8606130

Description:

DOMO 220 G2 ACC. INT OPAL DIFFUSER



Product code:


DIOPRD240G

DIOPRD240W

Description:

DOMO 220 ACC. OPAL GLASS GR.

DOMO 220 ACC. OPAL GLASS WH.



Product code:

DITRRD240B

Description:

DOMO 220/KOMBIC ACC. TRANSP GLASS BK.



Product code:


DITRRD240G

DITRRD240W

Description:

DOMO 220/KOMBIC ACC. TRANSP GLASS GR.

DOMO 220/KOMBIC ACC. TRANSP GLASS WH.



Product code:

RIRD240B

Description:

DOMO 220/KOMBIC ACC. DECO RING BK.



Product code:

RIRD240G

RIRD240W

Description:

DOMO 220/KOMBIC ACC. DECO RING GR.

DOMO 220/KOMBIC ACC. DECO RING WH.

