


F31RE112MOTÉ940NB

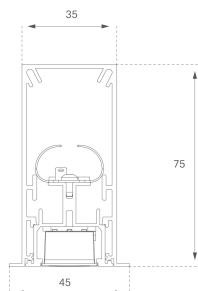

FIL35 REC 1120 2960 9NW TECH BK

Description:

Recessed structure for suspension or surface mounting, model FIL35 TECH by LAMP. Made of 80% recycled aluminium extrusion, length 1120 mm, with matt black reflector ULTRA COMFORT and optics for light distribution control and low glare UGR<12. Model for MID-POWER LED, with colour temperature 4000K and CRI90. Built-in electronic wiring. With IP43, IK07 degree of protection. Insulation class I. Photobiological safety group 0. Lifetime: 50000 L90 B10. Available finishes: White, black and grey. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte black RAL 9011


Dimensions: 1.120 x 35 x 76 mm

Weight: 3.240 g


Installation: Recessed

Recessing measures: 1,128 x 42 x 0 mm
TECHNICAL SPECIFICATIONS:

Light output:	1.760 lm	°K :	4000
Plum:	17,8W	CRI :	90
Efficacy:	98,9 lm/w	R9 :	85
UGR:	<12	MacAdam:	3
Type:	MID POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L90 B10 (Ta=25°C)	Gear:	Electronic
Power:	14W		

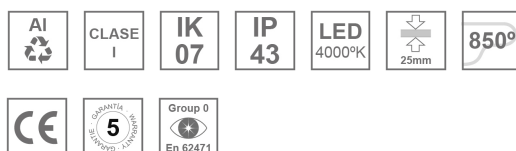Light output tolerance +/- 10%
**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

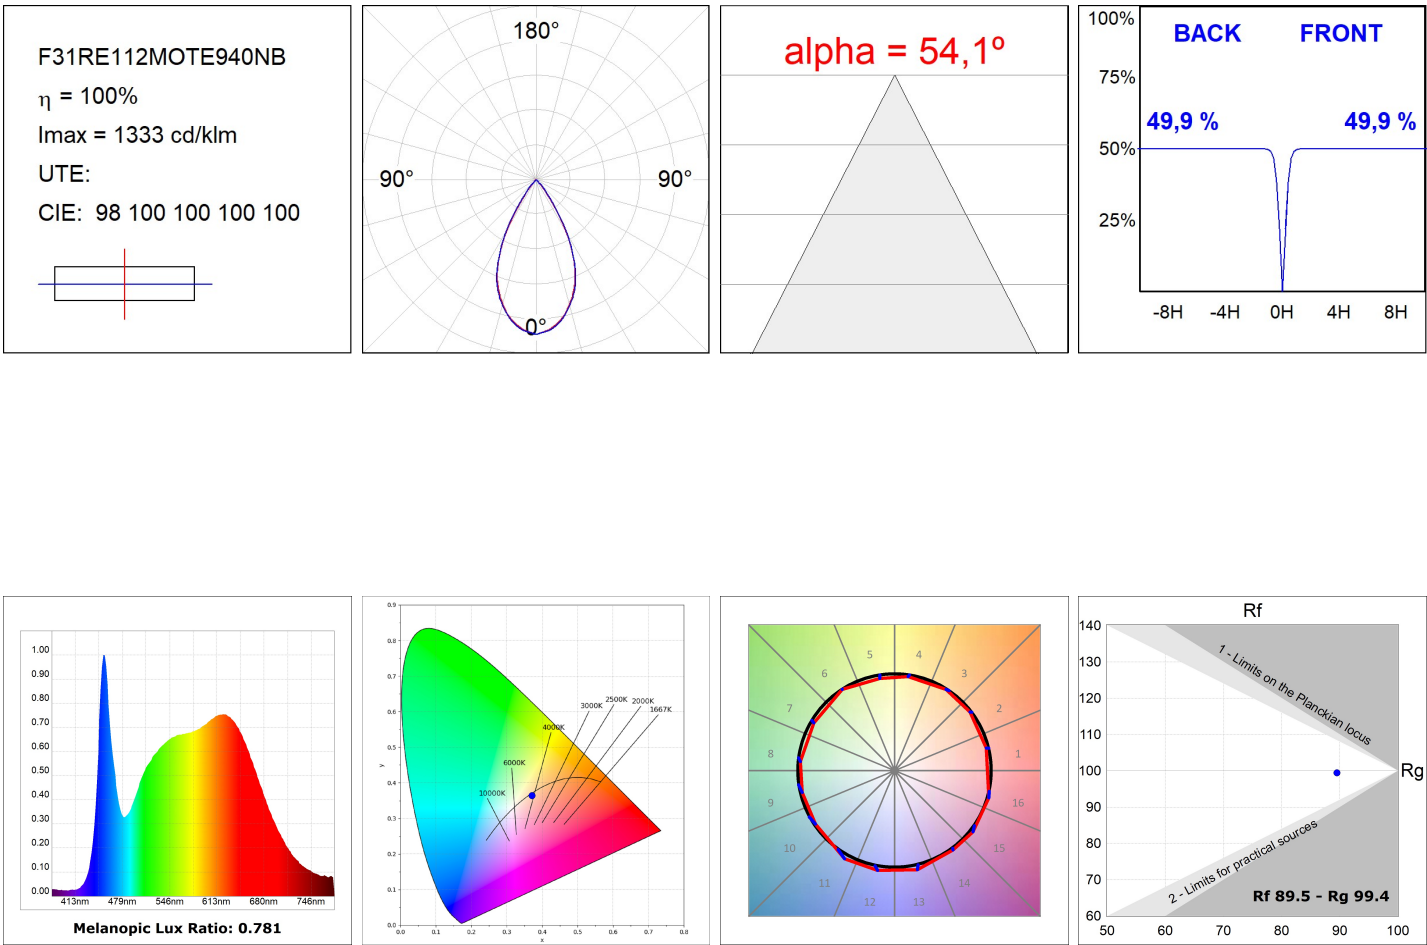

ACCESSORIES :
Assembly**Product code:**

F3COX/MMB

Description:

FIL 35 ACC. COVER X/MM BK.

**Product code:**

F3COX/MMG

Description:

FIL 35 ACC. COVER X/MM GR.

**Product code:**

F3COX/MMW

Description:

FIL 35 ACC. COVER X/MM WH.

**Product code:**

F3PRREX/MMB

Description:

FIL 35 ACC. REC PROFIL X/MM BK.

**Product code:**

F3PRREX/MMG

Description:

FIL 35 ACC. REC PROFIL X/MM GR.

**Product code:**

F3PRREX/MMW

Description:

FIL 35 ACC. REC PROFIL X/MM WH.

**Product code:**

F3REECB

Description:

FIL 35 ACC. REC END COVER BK.

**Product code:**

F3REECG

Description:

FIL 35 ACC. REC END COVER GR.

**Product code:**

F3REECW

Description:

FIL 35 ACC. REC END COVER WH.

**Product code:**

F3REJO

Description:

FIL35 ACC. INTM JOINT B RECESSED

ACCESSORIES :
Optical

FIL35



Product code:

F3DIX/MMOP

Description:

FIL 35 ACC. OPAL DIFFUSER X/MM