


F31RE140LOOC830DW



FIL35 REC 1400 2000 WW OP COMF DALI WH.

Description:

Structure to recessed model FIL35 REC 1400 LAMP brand. Made in extruded recycled aluminum with a rate of 80%, with and opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<19. Model for LED MID-POWER, colour temperature 3000K with CRI80 and with electronic wiring Dali included. With IP43, IK07 protection rating. Insulation Class I. Photobiological safety group 0. LED lifetime: 50.000 L90 B10. Available finishes: White, black and grey. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010

Dimensions: 1.400 x 45 x 76 mm

Weight: 3.350 g


Installation: Recessed

Recessing measures: 1,408 x 42 x 0 mm
TECHNICAL SPECIFICATIONS:

Light output:	1.334 lm	°K :	3000
Plum:	14,4W	CRI :	80
Efficacy:	92,7 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	MID POWER LED	Gear:	Adjustable DALI
LED Lifetime:	50.000 L90 B10 (Ta=25°C)		
Power:	14W		

Light output tolerance +/- 10%
**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

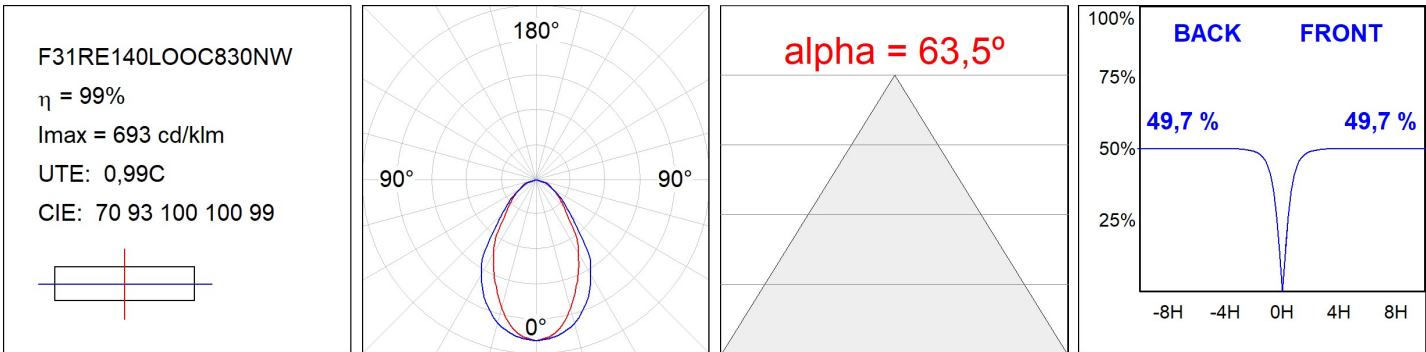

ACCESSORIES :
Assembly**Product code:**

F3COX/MMB

Description:

FIL 35 ACC. COVER X/MM BK.

**Product code:**

F3COX/MMG

Description:

FIL 35 ACC. COVER X/MM GR.

**Product code:**

F3COX/MMW

Description:

FIL 35 ACC. COVER X/MM WH.

**Product code:**

F3PRREX/MMB

Description:

FIL 35 ACC. REC PROFIL X/MM BK.

**Product code:**

F3PRREX/MMG

Description:

FIL 35 ACC. REC PROFIL X/MM GR.

**Product code:**

F3PRREX/MMW

Description:

FIL 35 ACC. REC PROFIL X/MM WH.

**Product code:**

F3REECB

Description:

FIL 35 ACC. REC END COVER BK.

**Product code:**

F3REECG

Description:

FIL 35 ACC. REC END COVER GR.

**Product code:**

F3REECW

Description:

FIL 35 ACC. REC END COVER WH.

**Product code:**

F3REJO

Description:

FIL35 ACC. INTM JOINT B RECESSED

ACCESSORIES :
Optical

FIL35



Product code:

F3DIX/MMOP

Description:

FIL 35 ACC. OPAL DIFFUSER X/MM