#### Product datasheet

## FIL35

### F31RE168MOOP830DW

\_

**Description:** 

Worktitude for light

# 2



Finish: Matte white RAL 9010

FIL35 REC 1680 4440 WW OPAL DALI WH.

Installation: Recessed

#### **TECHNICAL SPECIFICATIONS:**

Light output:	2.562 lm	⁰K :	3000
Plum:	25,2W	CRI :	80
Efficacy:	101,7 lm/w	MacAdam:	3
Туре:	MID POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	70.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	22W		

Light output tolerance +/- 10%




#### Product datasheet

# FIL35

F31RE168MOOP830DW

FIL35 REC 1680 4440 WW OPAL DALI WH.



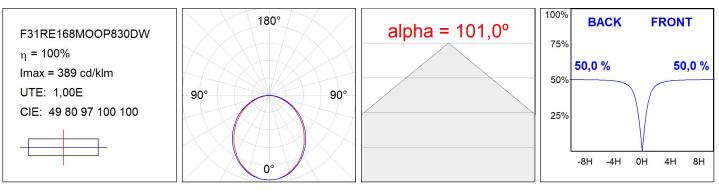

Worktitude for light

#### Product datasheet

# FIL35

## ACCESORIES :

## Assembly



Product code: F3COX/MMB

Description: FIL 35 ACC. COVER X/MM BK.



Product code: F3COX/MMG

Description: FIL 35 ACC. COVER X/MM GR.



Product code: F3COX/MMW Description: FIL 35 ACC. COVER X/MM WH.



Worktitude for light