


F31RE168MOOP840DB


- FIL35 REC 1680 4440 NW OPAL DALI BK.

**Description:****Finish:** Matte black RAL 9011**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	2.658 lm	<b>°K :</b>	4000
<b>Plum:</b>	25,2W	<b>CRI :</b>	80
<b>Efficacy:</b>	105,5 lm/w	<b>MacAdam:</b>	3
<b>Type:</b>	MID POWER LED	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	70.000 L80 B10 (Ta=25°C)	<b>Gear:</b>	Adjustable DALI
<b>Power:</b>	22W		

**Light output tolerance +/- 10%**

PHOTOMETRIC DATA :

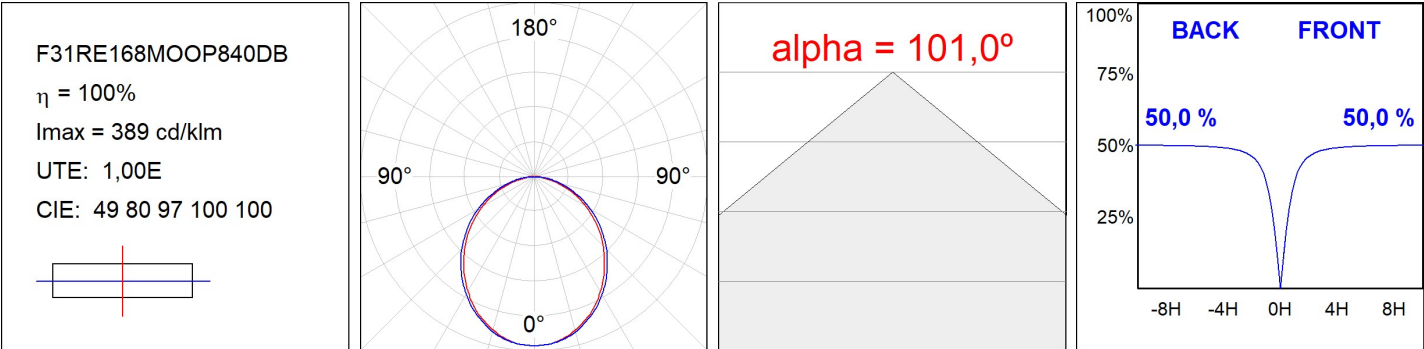

ACCESORIES :

Assembly



**Product code:**  
F3COX/MMB

**Description:**  
FIL 35 ACC. COVER X/MM BK.



**Product code:**  
F3COX/MMG

**Description:**  
FIL 35 ACC. COVER X/MM GR.



**Product code:**  
F3COX/MMW

**Description:**  
FIL 35 ACC. COVER X/MM WH.