


F31RE224LOOP830DB



FIL35 REC 2240 3200 WW OPAL DALI BK.

Description:

Structure to recessed model FIL35 REC 2240 LAMP brand. Made in extruded recycled aluminum with a rate of 80%, with opal polycarbonate diffuser. Model for LED MID-POWER, colour temperature 3000K with CRI80 and with electronic wiring Dali included. With IP20, IK07 protection rating. Insulation Class I. Photobiological safety group 0. LED lifetime: 50.000 L90 B10. Available finishes: White, black and grey.

Finish: Matte black RAL 9011

Dimensions: 2.240 x 45 x 76 mm

Weight: 5.350 g

Installation: Recessed

Recessing measures: 2,248 x 42 x 0 mm
TECHNICAL SPECIFICATIONS:
Light output: 2.310 lm

°K : 3000

Plum: 21,7W

CRI : 80

Efficacy: 106,5 lm/w

MacAdam: 3


Type: MID POWER LED

Power Supply: 220-240V 50/60Hz


LED Lifetime: 50.000 L90 B10 (Ta=25°C)

Gear: Adjustable DALI

Power: 21W

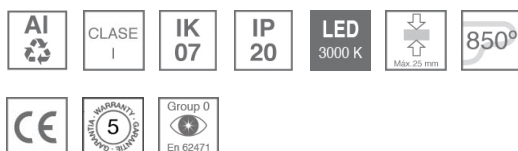Light output tolerance +/- 10%
**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

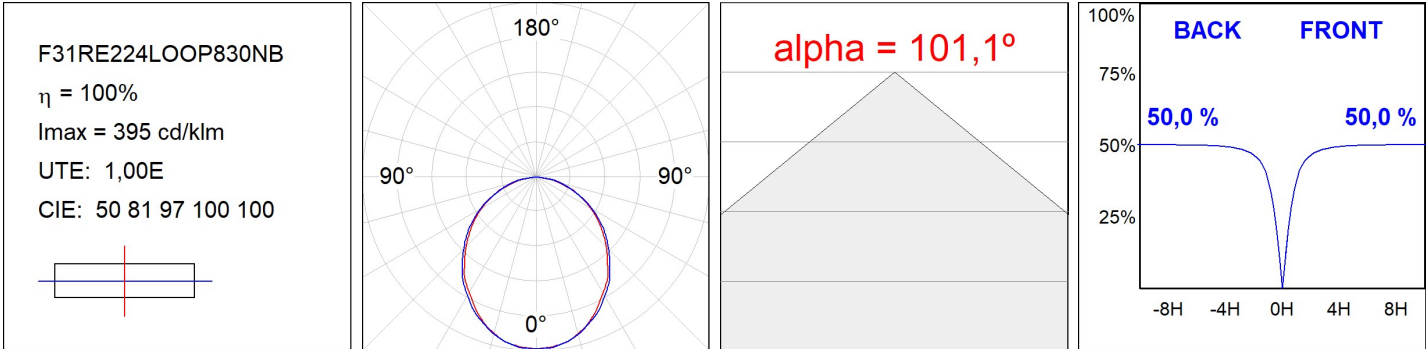

ACCESSORIES :
Assembly**Product code:**

F3COX/MMB

Description:

FIL 35 ACC. COVER X/MM BK.

**Product code:**

F3COX/MMG

Description:

FIL 35 ACC. COVER X/MM GR.

**Product code:**

F3COX/MMW

Description:

FIL 35 ACC. COVER X/MM WH.

**Product code:**

F3PRREX/MMB

Description:

FIL 35 ACC. REC PROFIL X/MM BK.

**Product code:**

F3PRREX/MMG

Description:

FIL 35 ACC. REC PROFIL X/MM GR.

**Product code:**

F3PRREX/MMW

Description:

FIL 35 ACC. REC PROFIL X/MM WH.

**Product code:**

F3REECB

Description:

FIL 35 ACC. REC END COVER BK.

**Product code:**

F3REECG

Description:

FIL 35 ACC. REC END COVER GR.

**Product code:**

F3REECW

Description:

FIL 35 ACC. REC END COVER WH.

**Product code:**

F3REJO

Description:

FIL35 ACC. INTM JOINT B RECESSED

ACCESSORIES :
Optical

FIL35



Product code:

F3DIX/MMOP

Description:

FIL 35 ACC. OPAL DIFFUSER X/MM