


## F31RE224LOOP840NG

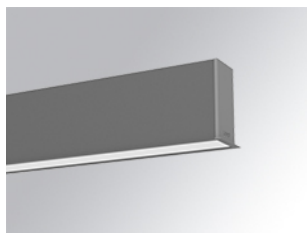


## FIL35 REC 2240 3200 NW OPAL GR.

**Description:**

Structure to recessed model FIL35 REC 2240 LAMP brand. Made in extruded recycled aluminum with a rate of 80%, with opal polycarbonate diffuser. Model for LED MID-POWER, colour temperature 4000K with CRI80 and with electronic wiring included. With IP43, IK07 protection rating. Insulation Class I. Photobiological safety group 0. LED lifetime: 50.000 L90 B10. Available finishes: White, black and grey. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Gloss grey**Dimensions:** 2.240 x 45 x 76 mm**Weight:** 5.350 g**Installation:** Recessed**Recessing measures:** 2,248 x 42 x 0 mm**TECHNICAL SPECIFICATIONS:****Light output:** 2.432 lm**°K :** 4000**Plum:** 21,7W**CRI :** 80**Efficacy:** 112,1 lm/w**MacAdam:** 3**Type:** MID POWER LED**Power Supply:** 220-240V 50/60Hz**LED Lifetime:** 50.000 L90 B10 (Ta=25°C)**Gear:** Electronic**Power:** 21W**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

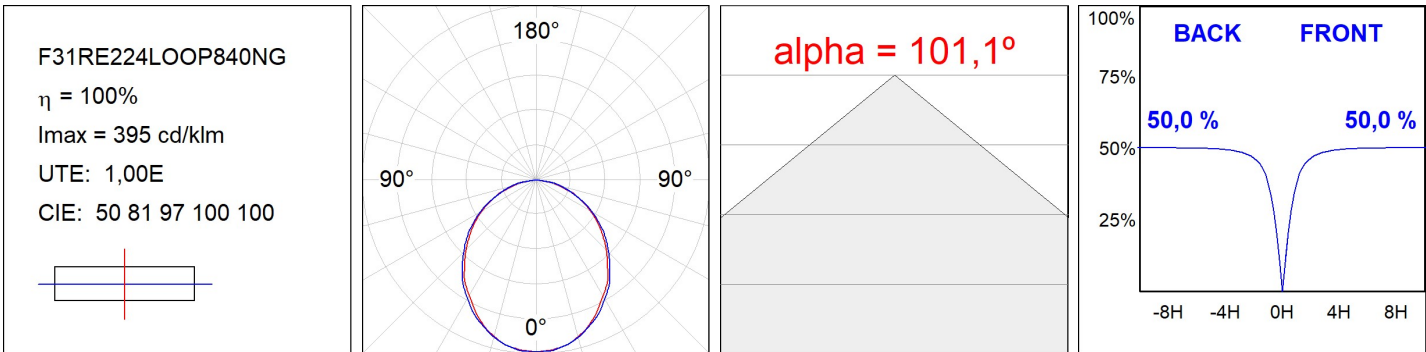

---

**ACCESSORIES :**
**Assembly****Product code:**

F3COX/MMB

**Description:**

FIL 35 ACC. COVER X/MM BK.

**Product code:**

F3COX/MMG

**Description:**

FIL 35 ACC. COVER X/MM GR.

**Product code:**

F3COX/MMW

**Description:**

FIL 35 ACC. COVER X/MM WH.

**Product code:**

F3PRREX/MMB

**Description:**

FIL 35 ACC. REC PROFIL X/MM BK.

**Product code:**

F3PRREX/MMG

**Description:**

FIL 35 ACC. REC PROFIL X/MM GR.

**Product code:**

F3PRREX/MMW

**Description:**

FIL 35 ACC. REC PROFIL X/MM WH.

**Product code:**

F3REECB

**Description:**

FIL 35 ACC. REC END COVER BK.

**Product code:**

F3REECG

**Description:**

FIL 35 ACC. REC END COVER GR.

**Product code:**

F3REECW

**Description:**

FIL 35 ACC. REC END COVER WH.

**Product code:**

F3REJO

**Description:**

FIL35 ACC. INTM JOINT B RECESSED

---

**ACCESSORIES :**
**Optical**

## FIL35



**Product code:**

F3DIX/MMOP

**Description:**

FIL 35 ACC. OPAL DIFFUSER X/MM