

## F31RE224MOOP830NB



## FIL35 REC 2240 5920 WW OPAL BK.

**Description:**

Structure to recessed model FIL35 REC 2240 LAMP brand. Made in extruded recycled aluminum with a rate of 80%, with opal polycarbonate diffuser. Model for LED MID-POWER, colour temperature 3000K with CRI80 and with electronic wiring included. With IP43, IK07 protection rating. Insulation Class I. Photobiological safety group 0. LED lifetime: 70.000 L80 B10. Available finishes: White, black and grey. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte black RAL 9011

**Dimensions:** 2.240 x 45 x 76 mm


**Weight:** 5.350 g

**Installation:** Recessed
**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	3.416 lm	<b>°K :</b>	3000
<b>Plum:</b>	36W	<b>CRI :</b>	80
<b>Efficacy:</b>	94,9 lm/w	<b>MacAdam:</b>	3
<b>Type:</b>	MID POWER LED	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	70.000 L80 B10 (Ta=25°C)	<b>Gear:</b>	Electronic
<b>Power:</b>	32W		

*Light output tolerance +/- 10%*
**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

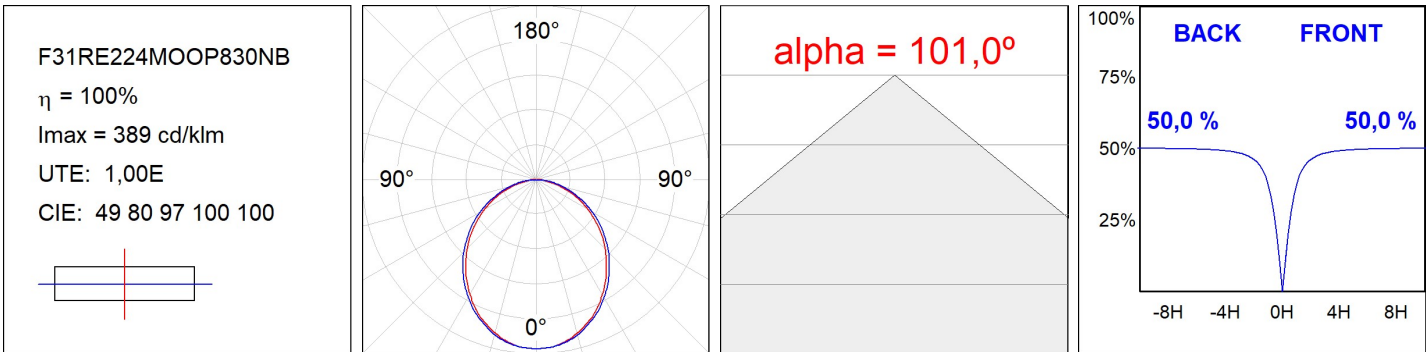

---

**ACCESSORIES :**
**Assembly****Product code:**

F3COX/MMB

**Description:**

FIL 35 ACC. COVER X/MM BK.

**Product code:**

F3COX/MMG

**Description:**

FIL 35 ACC. COVER X/MM GR.

**Product code:**

F3COX/MMW

**Description:**

FIL 35 ACC. COVER X/MM WH.

**Product code:**

F3PRRX/MMB

**Description:**

FIL 35 ACC. REC PROFIL X/MM BK.

**Product code:**

F3PRRX/MMG

**Description:**

FIL 35 ACC. REC PROFIL X/MM GR.

**Product code:**

F3PRRX/MMW

**Description:**

FIL 35 ACC. REC PROFIL X/MM WH.

**Product code:**

F3REECB

**Description:**

FIL 35 ACC. REC END COVER BK.

**Product code:**

F3REECG

**Description:**

FIL 35 ACC. REC END COVER GR.

**Product code:**

F3REECW

**Description:**

FIL 35 ACC. REC END COVER WH.

**Product code:**

F3REJO

**Description:**

FIL35 ACC. INTM JOINT B RECESSED

---

**ACCESSORIES :**
**Optical**

## FIL35



**Product code:**

F3DIX/MMOP

**Description:**

FIL 35 ACC. OPAL DIFFUSER X/MM