



F31SF084MOTE930DW



- FIL35 SUR 840 2200 9WW TECH DALI WH

Description:


Surface-mounted structure for suspension or surface mounting, model FIL35 TECH by LAMP. Made of 80% recycled aluminium extrusion, length 840 mm, with matt black reflector ULTRA COMFORT and optics for light distribution control and low glare UGR<12. Model for MID-POWER LED, with colour temperature 3000K and CRI90. Built-in electronic wiring Dali. With IP43, except for suspended installation, which becomes IP20, IK07 degree of protection. Insulation class I. Photobiological safety group 0. Lifetime: 50000 L90 B10. Available finishes: White, black and grey. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010**Dimensions:** 840 x 35 x 76 mm**Weight:** 2.000 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

Light output:	1.260 lm	°K :	3000
Plum:	13,7W	CRI :	90
UGR:	<12	R9 :	61
Type:	MID POWER LED	MacAdam:	3
LED Lifetime:	50.000 L90 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	11W	Gear:	Adjustable DALI

Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

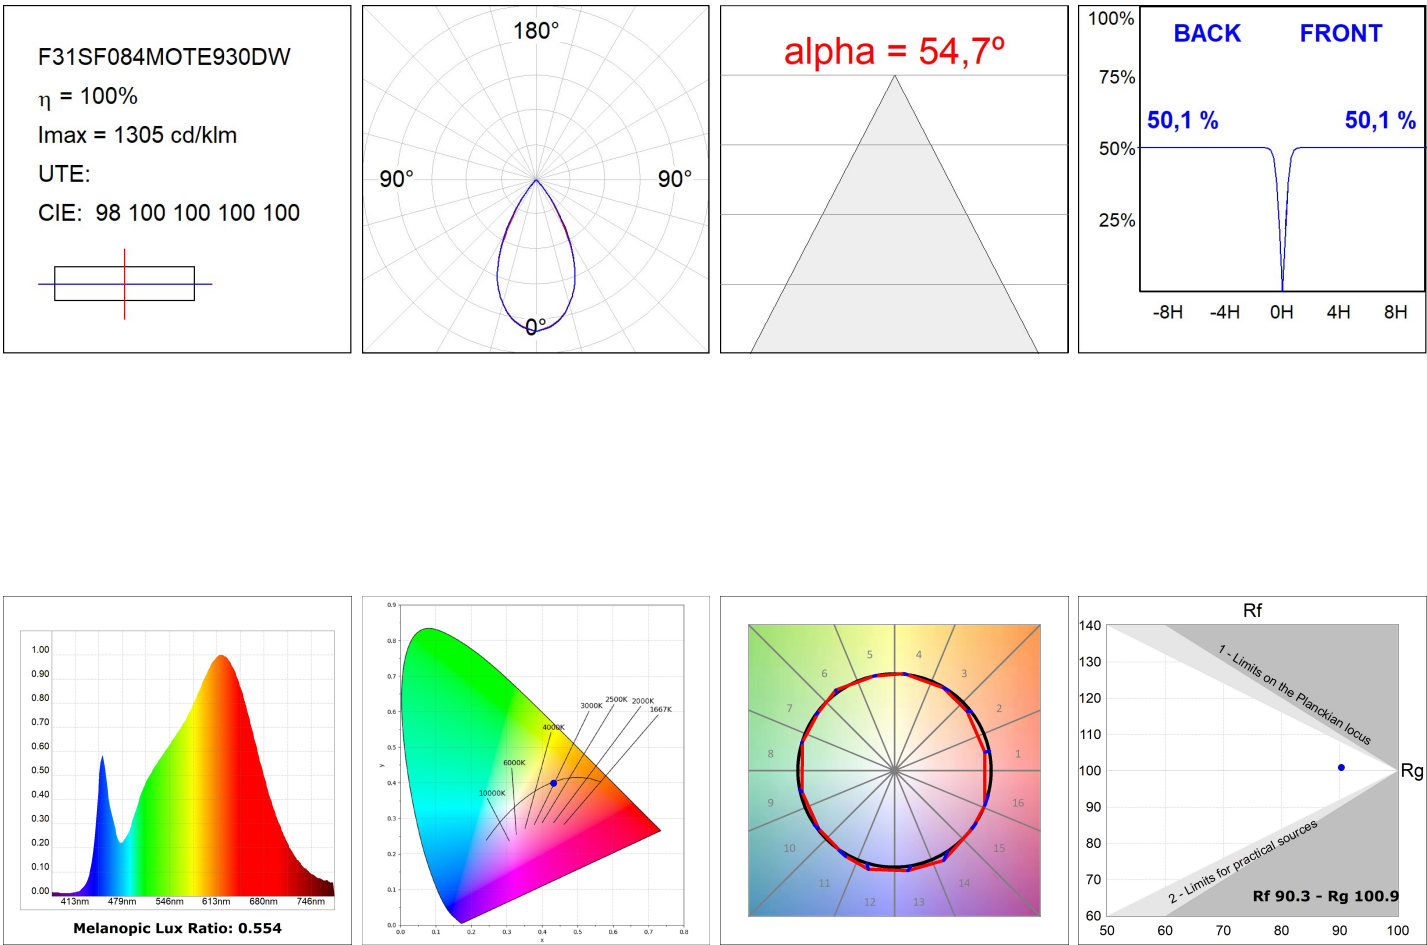

ACCESORIES :

Assembly



Product code:

F3FX50B

Description:

ACC. WALL BRACKET FIL45 50MM BK.



Product code:

F3FX50G

Description:

ACC. WALL BRACKET FIL35 50MM GR.



Product code:

F3FX50W

Description:

ACC. WALL BRACKET FIL35 50MM WH.

ACCESORIES :

Support



Product code:

F3FX15G

Description:

ACC. CEILING BRACKET FIL35 15MM GR.