



F31SF112MOIC830NG



- FIL35 SUR 1120 4360 WW D/I COMF GR.

Description:


Suspended structure model FIL35 SUR 1120 D/I LAMP brand. Made in extruded recycled aluminum with a rate of 80%, with an opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<19. Model for LED MID-POWER, colour temperature 3000K with CRI80 and with electronic wiring included. With IP20, IK07 protection rating. Insulation Class I. Photobiological safety group 0. LED lifetime: 70.000 L80 B10. Available finishes: White, black and grey. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Gloss grey**Dimensions:** 1.120 x 35 x 80 mm**Weight:** 2.650 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

Light output:	2.574 lm	°K :	3000
Plum:	29,3W	CRI :	80
Efficacy:	87,9 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	MID POWER LED	Gear:	Electronic
LED Lifetime:	70.000 L80 B10 (Ta=25°C)		
Power:	26W		


Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

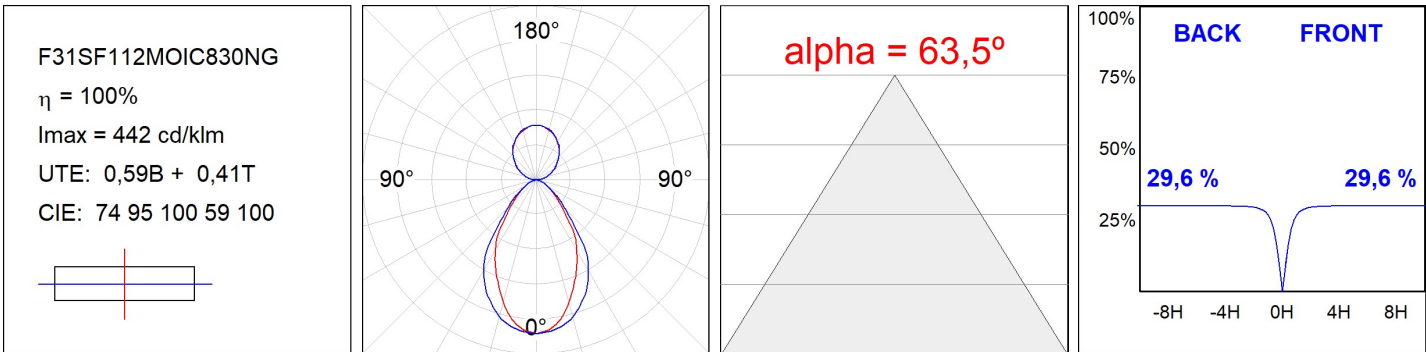

ACCESORIES :

Assembly




Product code:

F3COX/MMB

Description:

FIL 35 ACC. COVER X/MM BK.



Product code:

F3COX/MMG

Description:

FIL 35 ACC. COVER X/MM GR.



Product code:

F3COX/MMW

Description:

FIL 35 ACC. COVER X/MM WH.



Product code:

F3FX50B

Description:

ACC. WALL BRACKET FIL45 50MM BK.



Product code:

F3FX50G

Description:

ACC. WALL BRACKET FIL35 50MM GR.



Product code:

F3FX50W

Description:

ACC. WALL BRACKET FIL35 50MM WH.

ACCESORIES :

Support



Product code:

F3FX15G

Description:

ACC. CEILING BRACKET FIL35 15MM GR.