

F31SF112MOOC840DG

- **FIL35 SUR 1120 2960 NW OP COMF DALI GR.****Description:**

Suspended or mounted structure model FIL35 SUR 1120 2960 NW OPAL COMF DALI GR. LAMP brand. Made of extruded aluminium painted in matt grey with an opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<19. Model for LED MID-POWER, neutral white color temperature and control DALI gear included. With IP20, IK07 protection rating. Insulation class I. Photobiological safety group 0. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Gloss grey

**Installation:** Surface


**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	1.630 lm	<b>°K :</b>	4000
<b>Plum:</b>	18W	<b>CRI :</b>	80
<b>Efficacy:</b>	90,6 lm/w	<b>MacAdam:</b>	3
<b>UGR:</b>	<19	<b>Power Supply:</b>	220-240V 50/60Hz
<b>Type:</b>	MID POWER LED	<b>Gear:</b>	Adjustable DALI
<b>LED Lifetime:</b>	70.000 L80 B10 (Ta=25°C)		
<b>Power:</b>	16W		

*Light output tolerance +/- 10%*



PHOTOMETRIC DATA :

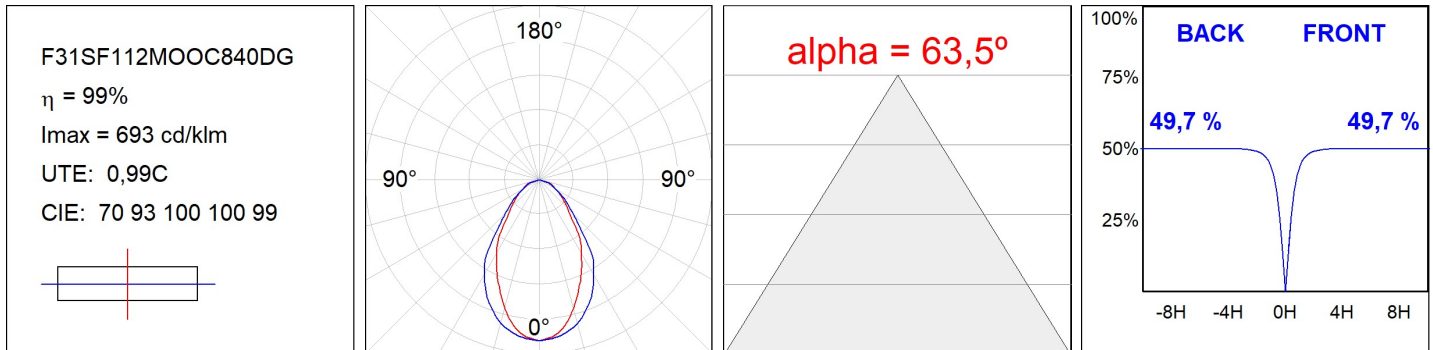

ACCESORIES :

Assembly



**Product code:**

F3COX/MMB

**Description:**

FIL 35 ACC. COVER X/MM BK.



**Product code:**

F3COX/MMG

**Description:**

FIL 35 ACC. COVER X/MM GR.



**Product code:**

F3COX/MMW

**Description:**

FIL 35 ACC. COVER X/MM WH.