FIL35

F31SF112MOOC840DW






FIL35 SUR 1120 2960 NW OP COMF DALI WH.

Description:

Suspended or mounted structure model FIL35 SUR 1120 LAMP brand. Made in extruded recycled aluminum with a rate of 80%, with and opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<19. Model for LED MID-POWER, colour temperature 4000K with CRI80 and with electronic wiring Dali included. With IP43, except for suspended installation, which becomes IP20, IK07 protection rating. Insulation Class I. Photobiological safety group 0. LED lifetime: 70.000 L90 B10. Available finishes: White, black and grey. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.



Dimensions: 1.120 x 35 x 80 mm

Weight: 2.435 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.630 lm	°K :	4000
Plum:	18W	CRI :	80
Efficacy:	90,6 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Туре:	MID POWER LED	Gear:	Adjustable DALI
LED Lifetime:	70.000 L80 B10 (Ta=25°C)		
Power:	16W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



Worktitude for light


FIL35

F31SF112MOOC840DW

FIL35 SUR 1120 2960 NW OP COMF DALI WH.



PHOTOMETRIC DATA :

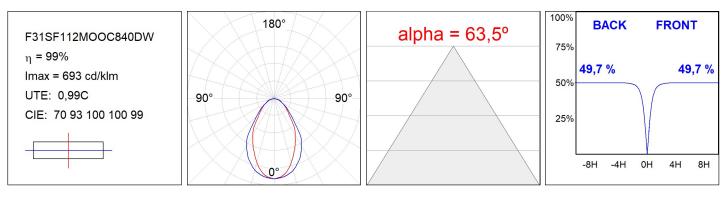

Product datasheet

FIL35

ACCESORIES :

Assembly




Product code: F3COX/MMB

Description: FIL 35 ACC. COVER X/MM BK.



Product code: F3COX/MMG





Product code: F3COX/MMW



Product code: F3FX50G



ACC. WALL BRACKET FIL35 50MM GR.



Product code: F3FX50B

Description: ACC. WALL BRACKET FIL45 50MM BK.




Product code: F3FX50W

Description: ACC. WALL BRACKET FIL35 50MM WH.



Product code: F3JO



Description:



Product code: F3PRSUX/MMB

Description: FIL 35 ACC. SUS PROFIL X/MM BK.



F3PRSUX/MMG

Description: FIL 35 ACC. SUS PROFIL X/MM GR.



Product code: F3PRSUX/MMW

Description: FIL 35 ACC. SUS PROFIL X/MM WH.



Product datasheet

FIL35





Product code: **F3SUECB**

Description: FIL35 ACC. SUR END COVER BK.



F3SUECG

Description: FIL35 ACC. SUR END COVER GR.



Product code:

F3SUECW

Description: FIL35 ACC. SUR END COVER WH.

ACCESORIES : Suspension



Product code: F3SUCAEMFA1000NB F3SUCAEMFA4000NB

Description: ACC. ELECMEC FIL35 QUICK SUSP 1M BK. ACC. ELECMEC FIL35 QUICK SUSP 4M BK.



Product code: F3SUCAEMFA1000NG F3SUCAEMFA4000NG

Description: ACC. ELECMEC FIL35 QUICK SUSP 1M GR. ACC. ELECMEC FIL35 QUICK SUSP 4M GR.



Product code: F3SUCAEMFA1000NW F3SUCAEMFA4000NW

Description: ACC. ELECMEC FIL35 QUICK SUSP 1M WH. ACC. ELECMEC FIL35 QUICK SUSP 4M WH.




Product code: F3SUCAWI1000DB F3SUCAWI4000DB

Description:

ACC. ELECMEC FIL35 QUICK SUSP 1M 5P BK. ACC. ELECMEC FIL35 QUICK SUSP 4M 5P BK.



Product code: F3SUCAWI1000DG F3SUCAWI4000DG



ACC. ELECMEC FIL35 QUICK SUSP 1M 5P GR. ACC. ELECMEC FIL35 QUICK SUSP 4M 5P GR.



Product code: F3SUCAWI1000DW F3SUCAWI4000DW

Description: ACC. ELECMEC FIL35 QUICK SUSP 1M 5P WH.

ACC. ELECMEC FIL35 QUICK SUSP 4M 5P WH.

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Product datasheet

FIL35





Description: FIL35 ACC. QUICK STEEL CABLE 1M NK.



F3SUWIDE4000G

Description: FIL35 ACC. QUICK STEEL CABLE 4M NK.

ACCESORIES : Support

F3SUWIDE1000G



Product code: F3FX15G Description: ACC. CEILING BRACKET FIL35 15MM GR.

ACCESORIES : Optical



Product code: F3DIX/MMOP Description: FIL 35 ACC. OPAL DIFFUSER X/MM