


## F31SF112MOTE940NW



## - FIL35 SUR 1120 2960 9NW TECH WH


**Description:**

Surface-mounted structure for suspension or surface mounting, model FIL35 TECH by LAMP. Made of 80% recycled aluminium extrusion, length 1120 mm, with matt black reflector ULTRA COMFORT and optics for light distribution control and low glare UGR<12. Model for MID-POWER LED, with colour temperature 4000K and CRI90. Built-in electronic wiring. With IP43, except for suspended installation, which becomes IP20, IK07 degree of protection. Insulation class I. Photobiological safety group 0. Lifetime: 50000 L90 B10. Available finishes: White, black and grey. Environmental Product Declaration - EPD® available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte white RAL 9010

**Dimensions:** 1.120 x 35 x 76 mm



**Weight:** 3.240 g

**Installation:** Surface
**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	1.760 lm	<b>°K :</b>	4000
<b>Plum:</b>	17,8W	<b>CRI :</b>	90
<b>Efficacy:</b>	98,9 lm/w	<b>R9 :</b>	85
<b>UGR:</b>	<12	<b>MacAdam:</b>	3
<b>Type:</b>	MID POWER LED	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50.000 L90 B10 (Ta=25°C)	<b>Gear:</b>	Electronic
<b>Power:</b>	14W		

*Light output tolerance +/- 10%*
**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

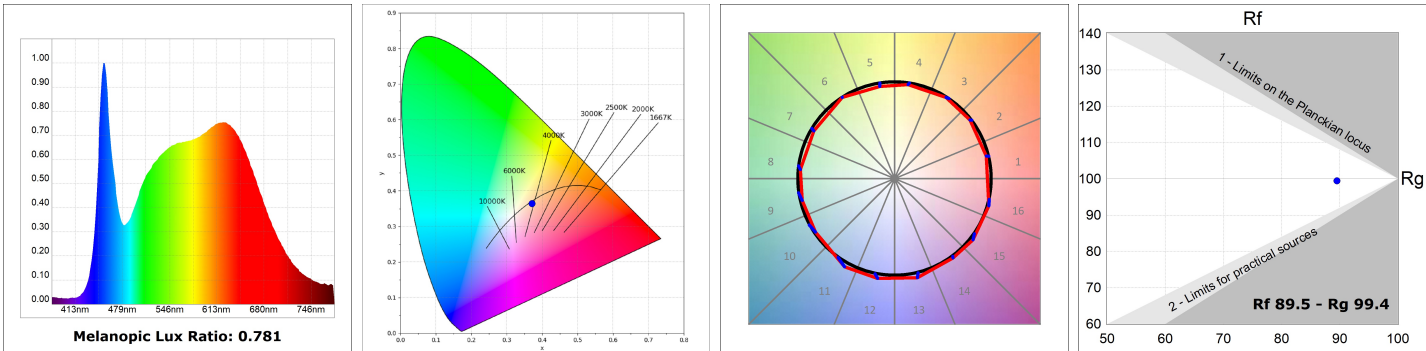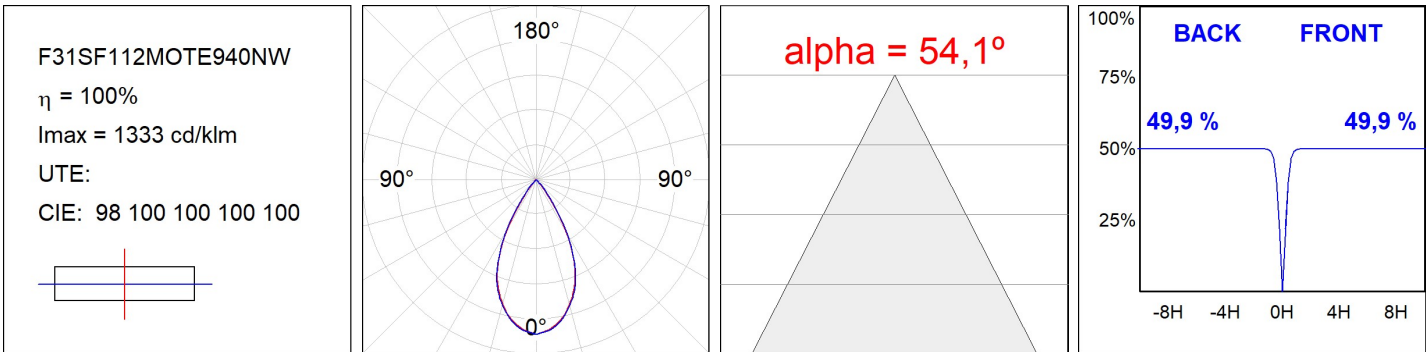

---

**ACCESORIES :**

**Assembly**



**Product code:**

F3FX50B

**Description:**

ACC. WALL BRACKET FIL45 50MM BK.



**Product code:**

F3FX50G

**Description:**

ACC. WALL BRACKET FIL35 50MM GR.



**Product code:**

F3FX50W

**Description:**

ACC. WALL BRACKET FIL35 50MM WH.

---

**ACCESORIES :**

**Support**



**Product code:**

F3FX15G

**Description:**

ACC. CEILING BRACKET FIL35 15MM GR.