**LAMP**
Worktitude for light

F31SF224LOOC840NG

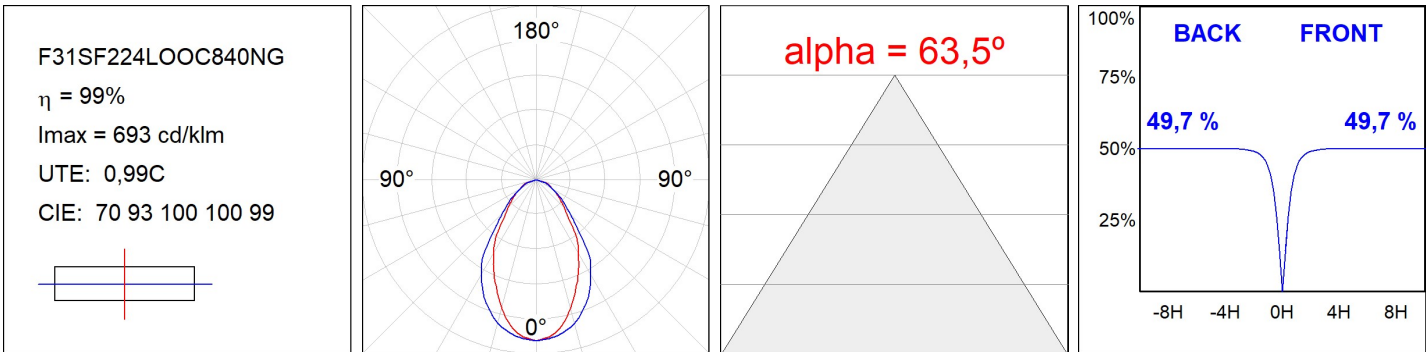**FIL35 SUR 2240 3200 NW OP COMF GR.**

Description:

Suspended or mounted structure model FIL35 SUR 2240 3200 NW OPAL COMF GR., LAMP brand. Made of extruded aluminium painted in matt grey with an opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low glare level, less than UGR 19. Model for LED MID-POWER, neutral white color temperature and control gear included. With IP20, IK07 protection rating. Insulation class I. Photobiological safety group 0.

Finish: Gloss grey

Dimensions: 2.240 x 35 x 80 mm

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	2.224 lm		**ºK :**	4000
Plum:	21,7W		**CRI :**	80
Efficacy:	102,5 lm/w		**MacAdam:**	3
UGR:	19		**Power Supply:**	220-240V 50/60Hz
Type:	MID POWER TRIDONIC		**Gear:**	Electronic
LED Lifetime:	50.000 L90 B10 (Ta=25ºC)			
Power:	22W			

Light output tolerance +/- 10%

CUSTOM MADE OPTIONS:

1-10V | | | | CRI | ↑lm | F | | L/ | PUSH | K | TW | WB

LAMP
Worktitude for light

F31SF224LOOC840NG   **FIL35 SUR 2240 3200 NW OP COMF GR.**

PHOTOMETRIC DATA :

F31SF224LOOC840NG

η = 99%

Imax = 693 cd/klm

UTE: 0,99C

CIE: 70 93 100 100 99

180°

90°   90°

0°

alpha = 63,5º

100%

75%   **BACK   FRONT**

49,7 %   49,7 %

50%

25%

-8H -4H   0H   4H   8H

22-12-2022

ACCESORIES :

Assembly

Product code:	**Description:**	**Product code:**	**Description:**
F3COX/MMB	FIL 35 ACC. COVER X/MM BK.	F3COX/MMG	FIL 35 ACC. COVER X/MM GR.
F3COX/MMW	FIL 35 ACC. COVER X/MM WH.	F3SUECB	FIL35 ACC. SUR END COVER BK.
F3SUECG	FIL35 ACC. SUR END COVER GR.	F3SUECW	FIL35 ACC. SUR END COVER WH.

ACCESORIES :

Suspension

Product code:	**Description:**	**Product code:**	**Description:**
F3SUCAEMFA1000NB	ACC. ELECMEC FIL35 QUICK SUSP 1M BK.	F3SUCAEMFA1000NG	ACC. ELECMEC FIL35 QUICK SUSP 1M GR.
F3SUCAEMFA4000NB	ACC. ELECMEC FIL35 QUICK SUSP 4M BK.	F3SUCAEMFA4000NG	ACC. ELECMEC FIL35 QUICK SUSP 4M GR.

Tel.   +34937366800

Web   www.lamp.es

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU

22-12-2022

Pág.   3 / 4

LAMP
Worktitude for light

Product code:

F3SUCAEMFA1000NW

F3SUCAEMFA4000NW

Description:

ACC. ELECMEC FIL35 QUICK SUSP 1M WH.

ACC. ELECMEC FIL35 QUICK SUSP 4M WH.

Product code:

F3SUCAWI1000DB

F3SUCAWI4000DB

Description:

ACC. ELECMEC FIL35 QUICK SUSP 1M 5P BK.

ACC. ELECMEC FIL35 QUICK SUSP 4M 5P BK.

Product code:

F3SUCAWI1000DG

F3SUCAWI4000DG

Description:

ACC. ELECMEC FIL35 QUICK SUSP 1M 5P GR.

ACC. ELECMEC FIL35 QUICK SUSP 4M 5P GR.

Product code:

F3SUCAWI1000DW

F3SUCAWI4000DW

Description:

ACC. ELECMEC FIL35 QUICK SUSP 1M 5P WH.

ACC. ELECMEC FIL35 QUICK SUSP 4M 5P WH.

Product code:

F3SUWIDE1000G

Description:

FIL35 ACC. QUICK STEEL CABLE 1M NK.

Product code:

F3SUWIDE4000G

Description:

FIL35 ACC. QUICK STEEL CABLE 4M NK.

Tel.   +34937366800

Web   www.lamp.es

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU

22-12-2022

Pág.   4 / 4