


F31TR224LOOP840DW



FIL35 TRIM 2240 3200 NW OPAL DALI WH.

Description:

Structure to recessed model FIL35 TRIM 2240 LAMP brand. Made in extruded recycled aluminum with a rate of 80%, with opal polycarbonate diffuser. Model for LED MID-POWER, colour temperature 4000K with CRI80 and with electronic wiring Dali included. With IP43, IK07 protection rating. Insulation Class I. Photobiological safety group 0. LED lifetime: 50.000 L90 B10. Available finishes: White, black and grey. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010

Dimensions: 2.240 x 51 x 76 mm

Weight: 4.900 g

Installation: Recessed

Recessing measures: 2,247 x 52 x 0 mm
TECHNICAL SPECIFICATIONS:
Light output: 2.432 lm

°K : 4000

Plum: 21,7W

CRI : 80

Efficacy: 112,1 lm/w

MacAdam: 3

Type: MID POWER LED

Power Supply: 220-240V 50/60Hz


LED Lifetime: 50.000 L90 B10 (Ta=25°C)

Gear: Adjustable DALI

Power: 21W

Light output tolerance +/- 10%
**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

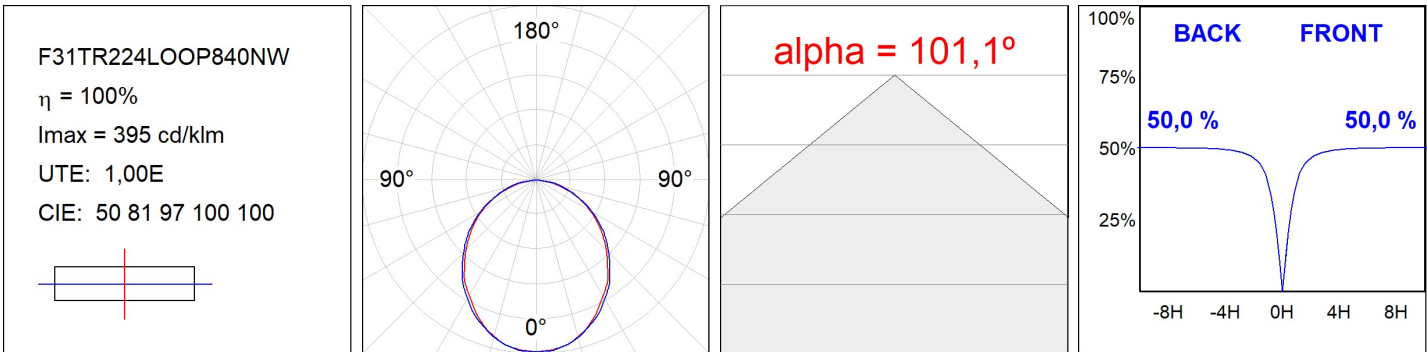

ACCESSORIES :
Assembly**Product code:**

F3COX/MMB

Description:

FIL 35 ACC. COVER X/MM BK.

**Product code:**

F3COX/MMG

Description:

FIL 35 ACC. COVER X/MM GR.

**Product code:**

F3COX/MMW

Description:

FIL 35 ACC. COVER X/MM WH.

**Product code:**


F3JO

Description:

FIL35 ACC. INTM JOINT B

F3REJO

FIL35 ACC. INTM JOINT B RECESSED

**Product code:**

F3PRTRX/MMW

Description:

FIL 35 ACC. TRIMLESS PROFIL X/MM WH.

**Product code:**

F3SUECB

Description:

FIL35 ACC. SUR END COVER BK.

**Product code:**

F3SUECG

Description:

FIL35 ACC. SUR END COVER GR.

**Product code:**

F3SUECW

Description:

FIL35 ACC. SUR END COVER WH.

**Product code:**

F3TRECW

Description:

FIL35 ACC. TRIM END COVER WH.

ACCESSORIES :
Optical

FIL35



Product code:

F3DIX/MMOP

Description:

FIL 35 ACC. OPAL DIFFUSER X/MM