FIL45

F41SF112MOPR935NB



FIL45 SUR 1120 2600 935 OP COMF BK.

Description:

Finish:

Suspended or mounted surface structure model FIL45 SUR 1120 LAMP brand. Made in extruded recycled aluminum with a rate of 80%, with opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<16. Model for LED MID-POWER, colour temperature 3500K with CRI90 and with electronic wiring included. With IP43, except for suspended installation, which becomes IP20, IK07 protection rating. Insulation Class I. Photobiological safety group 0. LED life time: 70.000 L80 B10. Available finishes: White, black and grey. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.



Dimensions: 1.120 x 45 x 80 mm

Matte black RAL 9011

Weight: 2.400 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.671 lm	°K :	3500	
Plum:	20,7W	CRI :	90	
Efficacy:	80,7 lm/w	MacAdam:	3	
UGR:	18	Power Supply:	220-240V 50/60Hz	
Туре:	MID POWER TRIDONIC	Gear:	Electronic	
LED Lifetime:	70.000 L80 B10 (Ta=25⁰C)			
Power:	16W			

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:




Worktitude for light

FIL45

F41SF112MOPR935NB

FIL45 SUR 1120 2600 935 OP COMF BK.



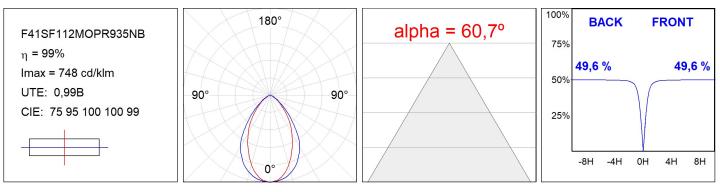

Worktitude for light

FIL45

ACCESORIES :

Assembly




Product code: F42JO

Description: FIL45 ACC. SU/RE INTM JOINT B



Product code: F4COX/MMB





Product code: F4COX/MMG





Product code: F4COX/MMW

Description: FIL 45 ACC. COVER X/MM WH.



Product code: F4FX50B



ACC. WALL BRACKET FIL45 50MM WH.



Product code: F4FX50G

Description: ACC. WALL BRACKET FIL45 50MM GR.





Product code: F4FX50W



Product code: F4PRSUX/MMB

Description: FIL 45 ACC. SUS PROFIL X/MM BK.



Product code:

F4PRSUX/MMG

Description: FIL 45 ACC. SUS PROFIL X/MM GR.

Description:



Product code: F4PRSUX/MMW

Description: FIL 45 ACC. SUS PROFIL X/MM WH.



FIL45





Product code: F4SUECB

Description: FIL45 ACC. SUR END COVER BK.



F4SUECG

Description: FIL45 ACC. SUR END COVER GR.



Product code:

F4SUECW

Description: FIL45 ACC. SUR END COVER WH.

ACCESORIES : Suspension



Product code: F4SUCAEMFA1000NB F4SUCAEMFA4000NB

Description: ACC. ELECMEC FIL45 QUICK SUSP 1M BK. ACC. ELECMEC FIL45 QUICK SUSP 4M BK.



Product code: F4SUCAEMFA1000NG F4SUCAEMFA4000NG

Description: ACC. ELECMEC FIL45 QUICK SUSP 1M GR. ACC. ELECMEC FIL45 QUICK SUSP 4M GR.



Product code: F4SUCAEMFA1000NW F4SUCAEMFA4000NW

Description: ACC. ELECMEC FIL45 QUICK SUSP 1M WH. ACC. ELECMEC FIL45 QUICK SUSP 4M WH.




Product code: F4SUCAWI1000DB F4SUCAWI4000DB

Description:

ACC. ELECMEC FIL45 QUICK SUSP 1M 5P BK. ACC. ELECMEC FIL45 QUICK SUSP 4M 5P BK.



Product code: F4SUCAWI1000DG F4SUCAWI4000DG



ACC. ELECMEC FIL45 QUICK SUSP 1M 5P GR. ACC. ELECMEC FIL45 QUICK SUSP 4M 5P GR.



Product code: F4SUCAWI1000DW F4SUCAWI4000DW



LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

FIL45





Description: FIL45 ACC. QUICK STEEL CABLE 1M NK.



F4SUWIDE4000G

Description: FIL45 ACC. QUICK STEEL CABLE 4M NK.

ACCESORIES : Support

F4SUWIDE1000G



Product code:

F4FX15G

Description: FIL45 ACC. CEILING BRACKET 15MM GR.

ACCESORIES : Optical



Product code: F4DIX/MMOP Description: FIL 45 ACC. OPAL DIFFUSER X/MM

ACCESORIES : Adjustment and control



Product code: F41EMG3HDWB Description: ACC.FIL45 DOWNLIGHT EMERGENCIA 3H BK



Product code: F41EMG3HDWG Description: ACC.FIL45 DOWNLIGHT EMERGENCIA 3H GR

FIL45





Product code: F41EMG3HDWW

Description: ACC.FIL45 DOWNLIGHT EMERGENCIA 3H WH



Product code: F41LIGHTSNDB

Description: ACC.FIL45 SENSOR BASIC ILD DALI-2 BK





ACC.FIL45 SENSOR BASIC ILD DALI-2 GR

Description:



Product code: F41LIGHTSNDW

Description: ACC.FIL45 SENSOR BASIC ILD DALI-2 WH