


F41SF168MOPRWBTDB



FIL45 SUR 1680 4200 WBT OP COMF DALI BK.

Description:

Finish: Matte white RAL 9010

Dimensions: 1.680 x 55 x 80 mm

Weight: 3.992 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output: 2.540 lm

Plum: 30,3W

Efficacy: 83,8 lm/w

UGR: <16

Type: MID POWER LED

LED Lifetime: 50.000 L70 (Ta=25°C)

Power: 26W

°K : 2700-6500

CRI : 95

MacAdam: 3

Power Supply: 220-240V 50/60Hz

Gear: Adjustable DALI


Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



PHOTOMETRIC DATA :

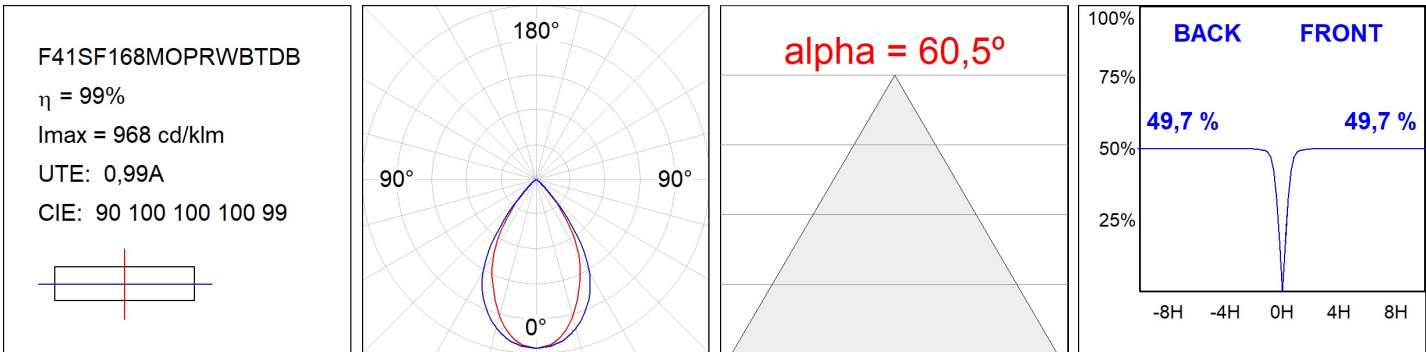

ACCESORIES :**Support****Product code:**

F4FX15G

Description:

FIL45 ACC. CEILING BRACKET 15MM GR.

ACCESORIES :**Adjustment and control****Product code:**

F41EMG3HDWB

Description:

ACC.FIL45 DOWNLIGHT EMERGENCIA 3H BK

**Product code:**

F41EMG3HDWG

Description:

ACC.FIL45 DOWNLIGHT EMERGENCIA 3H GR

**Product code:**

F41EMG3HDWW

Description:


ACC.FIL45 DOWNLIGHT EMERGENCIA 3H WH

**Product code:**

F41LIGHTSNDB

Description:

ACC.FIL45 SENSOR BASIC ILD DALI-2 BK

**Product code:**

F41LIGHTSNDG

Description:

ACC.FIL45 SENSOR BASIC ILD DALI-2 GR

**Product code:**

F41LIGHTSNDW

Description:

ACC.FIL45 SENSOR BASIC ILD DALI-2 WH