

F42RE140MOTÉ930DG



- FIL45 G2 REC 1400 2800 9WW TECH DALI GR

Description:

LAMP recessed structure FIL45 G2 REC 1400. Manufactured from extruded aluminum with an 80% recycling rate, optic and black mat polycarbonate reflector TECH ULTRACONFORT to control light distribution and reduce glare UGR <15. Model for LED MID-POWER, colour temperature 3000K and IRC90. Electronic DALI gear included. IP20, IK07 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 90.000 L80 B10. Available finishes: White, black and grey. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finition: Gris satiné**Dimensions:** 1.398 x 55 x 76 mm**Poids:** 3.410 g**Installation:** Encastré**Mesures encastrement:** 1,406 x 51 x 0 mm**SPÉCIFICATIONS TECHNIQUES:**

Flux lumineux:	2.183 lm	°K :	3000
Plum:	19W	IRC :	90
Efficacité:	114,9 lm/w	R9 :	71
UGR:	<15	MacAdam:	3
Type:	MID POWER	Alimentation:	220-240V 50/60Hz
Durée de vie LED:	90.000 L80 B10 (Ta=25°C)	Équipement:	Réglable DALI
Puissance:	17W		

Tolérance de flux lumineux +/- 10%**OPTIONS PERSONNALISABLES:**

F42RE140MOTE930DG

FIL45 G2 REC 1400 2800 9WW TECH DALI GR



DONNÉES PHOTOMÉTRIQUES :

F42RE140MOTE930DG

 $\eta = 100\%$ $I_{\max} = 906 \text{ cd/klm}$

UTE: 1,00A

CIE: 92 100 100 100 100





F42SF168MOTA930DW

 $\eta = 100\%$ $I_{\max} = 1070 \text{ cd/klm}$

UTE: 1,00A

CIE: 85 100 100 100 100

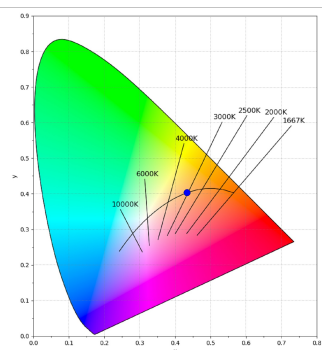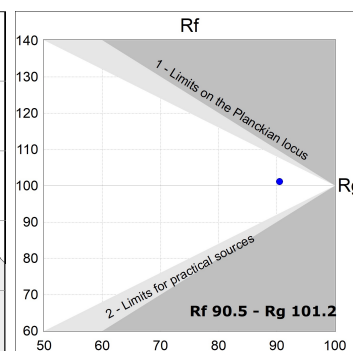 $\alpha = 87,1^\circ$ 

ACCESSOIRES :

Montage

**Code produit:**

F42JO

Description:

FIL45 ACC. SU/RE INTM JOINT B

**Code produit:**

F4COX/MMB

Description:

FIL 45 ACC. COVER X/MM BK.

**Code produit:**

F4COX/MMG

Description:

FIL 45 ACC. COVER X/MM GR.

**Code produit:**

F4COX/MMW

Description:

FIL 45 ACC. COVER X/MM WH.

**Code produit:**

F4PRREX/MMB

Description:

FIL 45 ACC. REC PROFIL X/MM BK.

**Code produit:**

F4PRREX/MMG

Description:

FIL 45 ACC. REC PROFIL X/MM GR.

**Code produit:**

F4PRREX/MMW

Description:

FIL 45 ACC. REC PROFIL X/MM WH.

**Code produit:**

F4REECB

Description:

FIL45 ACC. REC END COVER BK.

**Code produit:**

F4REECG

Description:

FIL45 ACC. REC END COVER GR.

**Code produit:**

F4REECW

Description:

FIL45 ACC. REC END COVER WH.



Code produit:

F4TORFG

Description:

FIL45 ACC. TOOL REMOVE REFLECTOR

ACCESSOIRES :

Optique



Code produit:

F4DIX/MMOP

Description:

FIL 45 ACC. OPAL DIFFUSER X/MM

ACCESSOIRES :

Contrôle et réglage



Code produit:

F41EMG3HDWB

Description:

ACC.FIL45 DOWNLIGHT EMERGENCIA 3H BK



Code produit:

F41EMG3HDWG

Description:

ACC.FIL45 DOWNLIGHT EMERGENCIA 3H GR



Code produit:

F41EMG3HDWW

Description:

ACC.FIL45 DOWNLIGHT EMERGENCIA 3H WH



Code produit:

F41LIGHTSNDB

Description:

ACC.FIL45 SENSOR BASIC ILD DALI-2 BK



Code produit:

F41LIGHTSNDG

Description:

ACC.FIL45 SENSOR BASIC ILD DALI-2 GR



Code produit:

F41LIGHTSNDW

Description:

ACC.FIL45 SENSOR BASIC ILD DALI-2 WH