


## F42SF224MOTE940NG



## - FIL45 G2 SUR 2240 4480 9NW TECH GR

**Description:**









LAMP suspended or surface mounted structure FIL45 G2 SUR 2240. Manufactured from extruded aluminum with an 80% recycling rate, optic and black mat polycarbonate reflector TECH ULTRACONFORT to control light distribution and reduce glare UGR <15. Model for LED MID-POWER, colour temperature 4000K and IRC90. Electronic ON OFF gear included. IP20, IK07 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 90.000 L80 B10. Available finishes: White, black and grey. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finition:** Gris satiné**Dimensions:** 2.238 x 45 x 80 mm**Poids:** 4.970 g**Installation:** Surface**SPÉCIFICATIONS TECHNIQUES:**

<b>Flux lumineux:</b>	3.657 lm	<b>°K :</b>	4000
<b>Plum:</b>	29,7W	<b>IRC :</b>	90
<b>Efficacité:</b>	123,1 lm/w	<b>R9 :</b>	67
<b>UGR:</b>	<15	<b>MacAdam:</b>	3
<b>Type:</b>	MID POWER	<b>Alimentation:</b>	220-240V 50/60Hz
<b>Durée de vie LED:</b>	90.000 L80 B10 (Ta=25°C)	<b>Équipement:</b>	Électronique
<b>Puissance:</b>	26W		

*Tolérance de flux lumineux +/- 10%***OPTIONS PERSONNALISABLES:**

**DONNÉES PHOTOMÉTRIQUES :**

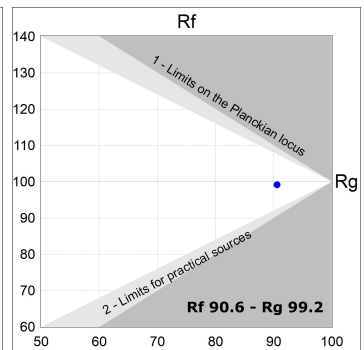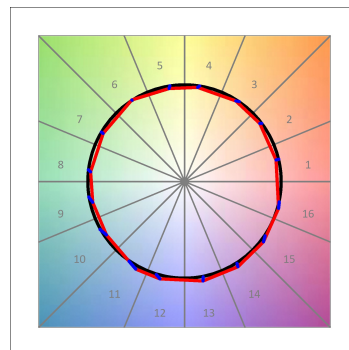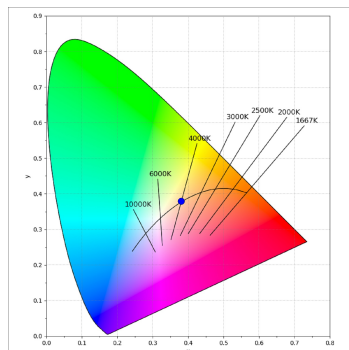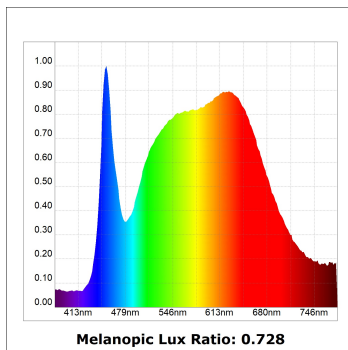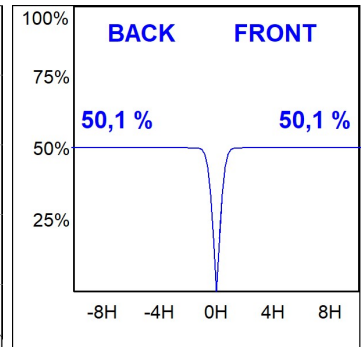

**ACCESSOIRES :**

**Montage**



**Code produit:**

F42JO

**Description:**

FIL45 ACC. SU/RE INTM JOINT B



**Code produit:**

F4COX/MMB

**Description:**

FIL 45 ACC. COVER X/MM BK.



**Code produit:**

F4COX/MMG

**Description:**

FIL 45 ACC. COVER X/MM GR.



**Code produit:**

F4COX/MMW

**Description:**

FIL 45 ACC. COVER X/MM WH.



**Code produit:**

F4FX50B

**Description:**

ACC. WALL BRACKET FIL45 50MM BK.



**Code produit:**

F4FX50G

**Description:**

ACC. WALL BRACKET FIL45 50MM GR.



**Code produit:**

F4FX50W

**Description:**

ACC. WALL BRACKET FIL45 50MM WH.



**Code produit:**

F4PRSUX/MMB

**Description:**

FIL 45 ACC. SUS PROFIL X/MM BK.



**Code produit:**

F4PRSUX/MMG

**Description:**

FIL 45 ACC. SUS PROFIL X/MM GR.



**Code produit:**

F4PRSUX/MMW

**Description:**

FIL 45 ACC. SUS PROFIL X/MM WH.

**ACCESSOIRES :**

**Suspension**



**Code produit:**

F4SUCAEMFA1000NB  
F4SUCAEMFA4000NB

**Description:**

ACC. ELECMEC FIL45 QUICK SUSP 1M BK.  
ACC. ELECMEC FIL45 QUICK SUSP 4M BK.



**Code produit:**

F4SUCAEMFA1000NG  
F4SUCAEMFA4000NG

**Description:**

ACC. ELECMEC FIL45 QUICK SUSP 1M GR.  
ACC. ELECMEC FIL45 QUICK SUSP 4M GR.



**Code produit:**

F4SUCAEMFA1000NW  
F4SUCAEMFA4000NW

**Description:**

ACC. ELECMEC FIL45 QUICK SUSP 1M WH.  
ACC. ELECMEC FIL45 QUICK SUSP 4M WH.



**Code produit:**

F4SUCAWI1000DB  
F4SUCAWI4000DB

**Description:**

ACC. ELECMEC FIL45 QUICK SUSP 1M 5P BK.  
ACC. ELECMEC FIL45 QUICK SUSP 4M 5P BK.



**Code produit:**

F4SUCAWI1000DG  
F4SUCAWI4000DG

**Description:**

ACC. ELECMEC FIL45 QUICK SUSP 1M 5P GR.  
ACC. ELECMEC FIL45 QUICK SUSP 4M 5P GR.



**Code produit:**

F4SUCAWI1000DW

**Description:**

ACC. ELECMEC FIL45 QUICK SUSP 1M 5P WH.

---

**ACCESSOIRES :**

**Support**



**Code produit:**

F4FX15G


**Description:**

FIL45 ACC. CEILING BRACKET 15MM GR.

---

**ACCESSOIRES :**

**Optique**



**Code produit:**  
F4DIX/MMOP

**Description:**  
FIL 45 ACC. OPAL DIFFUSER X/MM

**ACCESSOIRES :**

**Contrôle et réglage**



**Code produit:**  
F41EMG3HDWB

**Description:**  
ACC.FIL45 DOWNLIGHT EMERGENCIA 3H BK



**Code produit:**  
F41EMG3HDWG

**Description:**  
ACC.FIL45 DOWNLIGHT EMERGENCIA 3H GR




**Code produit:**  
F41EMG3HDWW

**Description:**  
ACC.FIL45 DOWNLIGHT EMERGENCIA 3H WH



**Code produit:**  
F41LIGHTSNDB

**Description:**  
ACC.FIL45 SENSOR BASIC ILD DALI-2 BK



**Code produit:**  
F41LIGHTSNDG

**Description:**  
ACC.FIL45 SENSOR BASIC ILD DALI-2 GR



**Code produit:**  
F41LIGHTSNDW

**Description:**  
ACC.FIL45 SENSOR BASIC ILD DALI-2 WH