

F52RC170MOPR840DW



FIL 50 G2 PRISM REC 4600 NW DALI WH.

Description:


Structure to recessed model FIL 50 REC 1700 LAMP brand. Made in extruded recycled aluminum with a rate of 80%, with prismatic diffuser en polycarbonate translucide et un film optique pour un contrôle de la distribution lumineuse procurant un facteur d'éblouissement inférieur à UGR19. Model for LED MID-POWER, colour temperature 4000K with CRI80 and with electronic wiring Dali included. With IP42, IK07 protection rating. Insulation Class I. Photobiological safety group 0. LED lifetime: 70.000 L80 B10. Available finishes: White and grey. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010

Dimensions: 1.700 x 66 x 67 mm


Weight: 2.860 g

Installation: Recessed

Recessing measures: 1,710 x 52 x 80 mm


TECHNICAL SPECIFICATIONS:


Light output:	3.075 lm	°K :	4000
Plum:	31,2W	CRI :	80
Efficacy:	98,6 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	MID POWER LED	Gear:	Adjustable DALI
LED Lifetime:	70.000 L80 B10 (Ta=25°C)		
Power:	28W		

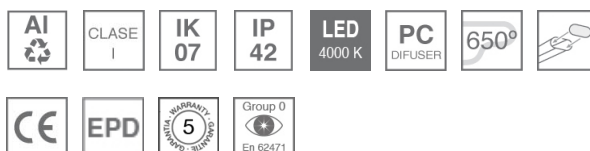Light output tolerance +/- 10%


CUSTOM MADE OPTIONS:



PHOTOMETRIC DATA :

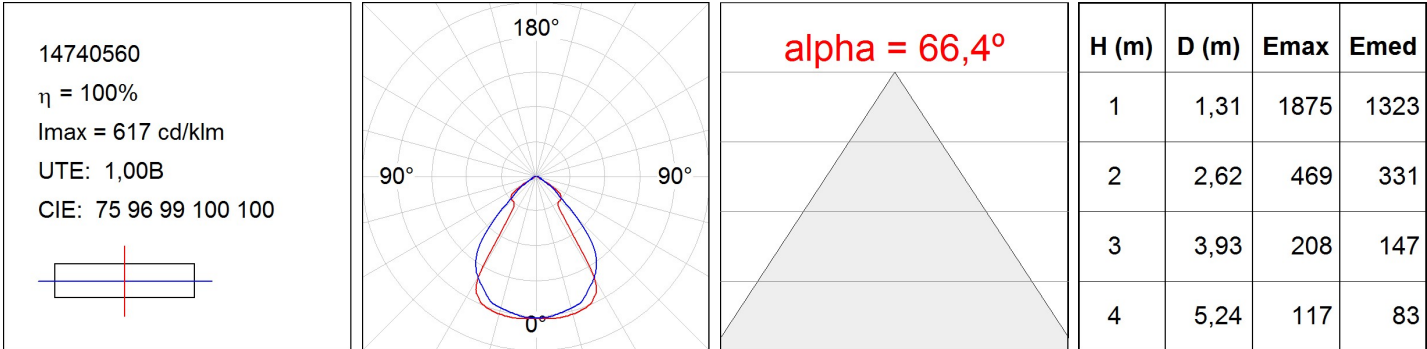


ACCESORIES :

Assembly



Product code:
ELWRST

Description:
ACC. ELECTROSTATICS WRIST STRAP




Product code:
F5COX/MMG
F5COX/MMW
F5PRREX/MMG
F5PRREX/MMW

Description:
FIL 50 ACC. COVER X/MM GR.
FIL 50 ACC. COVER X/MM WH.
FIL 50 ACC. REC PROFIL X/MM GR.
FIL 50 ACC. REC PROFIL X/MM WH.




Product code:
F5JO

Description:
ACC. INTM JOINT B



Product code:
F5REECG
F5REECW

Description:
FIL 50 ACC. REC END COVER GR.
FIL 50 ACC. REC END COVER WH.



Product code:
F5REHCG
F5REHCW

Description:
FIL 50 ACC. REC 90° CORNER GR.
FIL 50 ACC. REC 90° CORNER WH.