FIL 50

F53RE112MOOC840NG



FIL50 G3 REC 1120 2600 840 COMFORT GR

Description:

Finish:

Structure to recessed model FIL50 REC 1120 LAMP brand. Made in extruded recycled aluminum with a rate of 80%, with and opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<19. Model for LED MID-POWER, colour temperature 4000K with CRI80 and with electronic wiring included. With IP43, except for suspended installation, which becomes IP20, IK07 protection rating. Insulation Class I. Photobiological safety group 0. LED lifetime: 72.000 L80 B10. Available finishes: White and grey. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.



80	
*	

Gloss grey Dimensions: 1.123 x 66 x 67 mm

Weight: 2.166 g


Installation: Recessed

1,133 x 52 x 80 mm **Recessing measures:**

TECHNICAL SPECIFICATIONS:

Light output:	2.147 lm	⁰K :	4000	
Plum:	20,1W	CRI :	80	
Efficacy:	106,8 lm/w	MacAdam:	3	
UGR:	<19	Power Supply:	220-240V 50/60Hz	
Туре:	MID POWER LED	Gear:	Electronic	
LED Lifetime:	72.000 L80 B10 (Ta=25ºC)			
Power:	18,1W			

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



Worktitude for light


FIL 50

F53RE112MOOC840NG

FIL50 G3 REC 1120 2600 840 COMFORT GR



PHOTOMETRIC DATA :

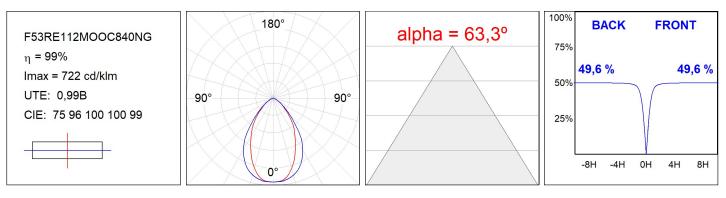

Product datasheet

FIL 50

ACCESORIES :

Assembly



Product code: ELWRST





Product code: F5COX/MMG F5COX/MMW F5PRREX/MMG F5PRREX/MMW

Description:

FIL 50 ACC. COVER X/MM GR. FIL 50 ACC. COVER X/MM WH. FIL 50 ACC. REC PROFIL X/MM GR. FIL 50 ACC. REC PROFIL X/MM WH.



Product code: F5DIX/MMOP





Product code: F5JO

Description: ACC. INTM JOINT B



Product code: F5REECG F5REECW

Description: FIL 50 ACC. REC END COVER GR. FIL 50 ACC. REC END COVER WH.



Product code: F5REHCG F5REHCW

Description:

FIL 50 ACC. REC 90° CORNER GR. FIL 50 ACC. REC 90° CORNER WH.

