

F53RE168HOPR830DW




FIL 50 G3 REC 1680 9300 WW PRISM DALI WH

Description:

LAMP recessed structure FIL 50 REC 1680. Manufactured from extruded aluminum with an 80% recycling rate, diffuser made of prismatic polycarbonate to control light distribution and reduce glare UGR<19. Model for MID-POWER LED, warm white colour temperature and control gear included. With opal polycarbonat e diffuser. With a IP43, IK07 protection rating. Insulation class I. Photobiological safety group 0. LED lifetime: 72.000 L80 B10. White and grey finishes available. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010

Dimensions: 1.683 x 66 x 67 mm

Weight: 2.860 g

Installation: Recessed

Recessing measures: 1,693 x 52 x 80 mm

TECHNICAL SPECIFICATIONS:

Light output: 6.672 lm

°K : 3000

Plum: 59,10W

CRI : 80

Efficacy: 112,9 lm/w

MacAdam: 3

UGR: <19


Power Supply: 220-240V 50/60Hz

Type: MID POWER LED

Gear: Adjustable DALI

LED Lifetime: 72.000 L80 B10 (Ta=25°C)


Power: 53.7W

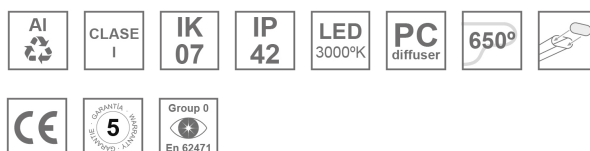Light output tolerance +/- 10%


CUSTOM MADE OPTIONS:



PHOTOMETRIC DATA :

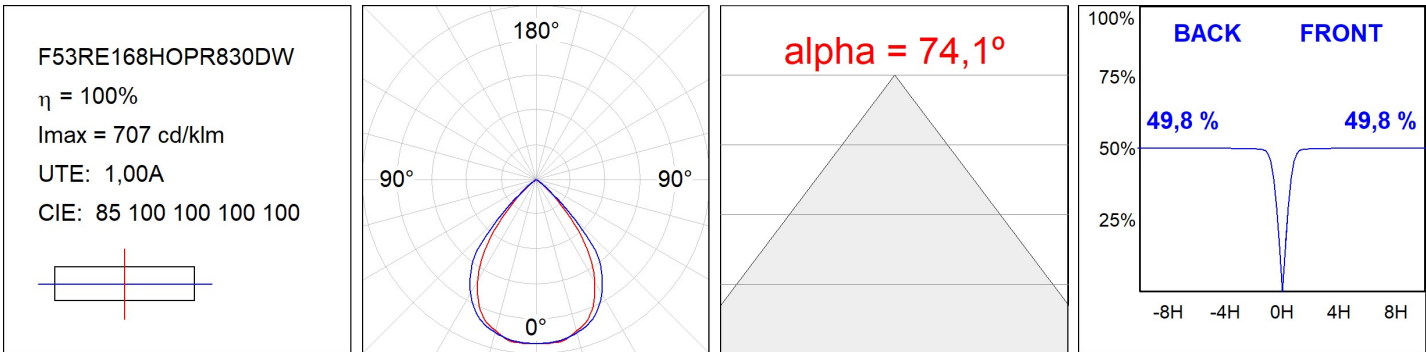

ACCESORIES :

Assembly



Product code:
ELWRST

Description:
ACC. ELECTROSTATICS WRIST STRAP




Product code:
F5COX/MMG
F5COX/MMW
F5PRREX/MMG
F5PRREX/MMW

Description:
FIL 50 ACC. COVER X/MM GR.
FIL 50 ACC. COVER X/MM WH.
FIL 50 ACC. REC PROFIL X/MM GR.
FIL 50 ACC. REC PROFIL X/MM WH.



Product code:
F5JO

Description:
ACC. INTM JOINT B



Product code:
F5REECG
F5REECW

Description:
FIL 50 ACC. REC END COVER GR.
FIL 50 ACC. REC END COVER WH.



Product code:
F5REHCG
F5REHCW

Description:
FIL 50 ACC. REC 90° CORNER GR.
FIL 50 ACC. REC 90° CORNER WH.