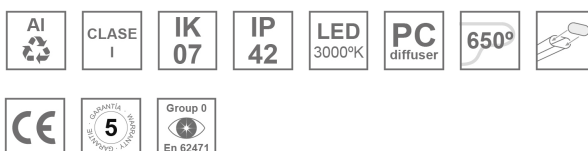



F53RE168MOPR830NW

**FIL 50 G3 REC 1680 3900 WW PRISM WH****Description:**

LAMP recessed structure FIL 50 REC 1680. Manufactured from extruded recycled aluminum with a rate of 80%, with prismatic diffuser polycarbonate to control light distribution and reduce glare UGR<19. Model for LED MID-POWER, colour temperature 3000K with CRI80 and with electronic gear included. IP43, IK07 ratings. Insulation Class I. Photobiological safety group 0. LED lifetime: 72.000 L80 B10. White and grey finishes available. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010**Dimensions:** 1.683 x 66 x 67 mm**Weight:** 2.860 g**Installation:** Recessed**Recessing measures:** 1,693 x 52 x 80 mm**TECHNICAL SPECIFICATIONS:****Light output:** 3.473 lm**°K :** 3000**Plum:** 31,20W**CRI :** 80**Efficacy:** 111,3 lm/w**MacAdam:** 3**UGR:** <19**Power Supply:** 220-240V 50/60Hz**Type:** MID POWER LED**Gear:** Electronic**LED Lifetime:** 72.000 L80 B10 (Ta=25°C)**Power:** 26.8W**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

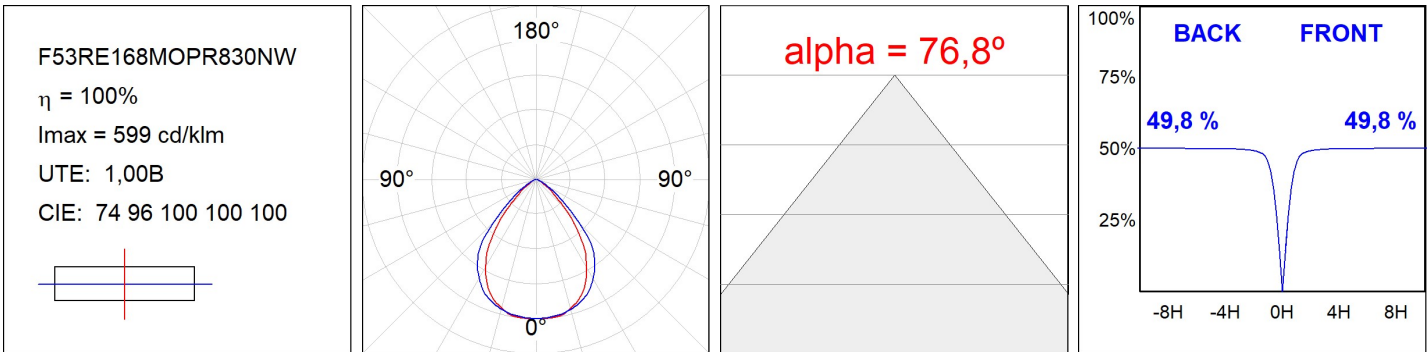

ACCESORIES :

Assembly



Product code:
ELWRST

Description:
ACC. ELECTROSTATICS WRIST STRAP




Product code:
F5COX/MMG
F5COX/MMW
F5PRREX/MMG
F5PRREX/MMW

Description:
FIL 50 ACC. COVER X/MM GR.
FIL 50 ACC. COVER X/MM WH.
FIL 50 ACC. REC PROFIL X/MM GR.
FIL 50 ACC. REC PROFIL X/MM WH.



Product code:
F5JO

Description:
ACC. INTM JOINT B



Product code:
F5REECG
F5REECW

Description:
FIL 50 ACC. REC END COVER GR.
FIL 50 ACC. REC END COVER WH.



Product code:
F5REHCG
F5REHCW

Description:
FIL 50 ACC. REC 90° CORNER GR.
FIL 50 ACC. REC 90° CORNER WH.