



F71HCSFHOO840NW



FIL 70 CORNER OPAL SUS 2200 NW WH.

Description:

Suspended or mounted surface luminaire 90° corner model FIL 70 CORNER OPAL SUS 2200 NW WH., LAMP brand. Made of matt white painted extruded aluminium with opal polycarbonate diffuser. Model for LED MID-POWER with neutral white colour temperature and control gear included. IP43, IK06 protection rating. Insulation class I. Photobiological safety group 0. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010


Weight: 1.416 g

Installation: Suspended
TECHNICAL SPECIFICATIONS:

Light output:	1.813 lm	°K :	4000
Plum:	16W	CRI :	80
Efficacy:	113,3 lm/w	MacAdam:	3
Type:	MID POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	14W		

Light output tolerance +/- 10%
**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

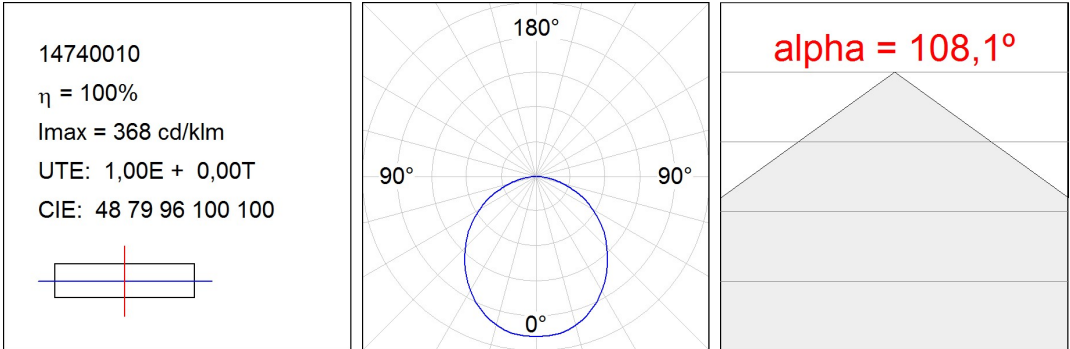

ACCESORIES :
Assembly**Product code:**

ELWRST

Description:

ACC. ELECTROSTATICS WRIST STRAP

**Product code:**

F7COSUX/MMG

F7COSUX/MMW

F7PRSUX/MMG

F7PRSUX/MMW

Description:

FIL 70 ACC. COVER X/MM GR.

FIL 70 ACC. COVER X/MM WH.

FIL 70 ACC. SUS PROFILE X/MM GR.

FIL 70 ACC. SUS PROFILE X/MM WH.

**Product code:**

F7JO

Description:

ACC. INTM JOINT

**Product code:**

F7SFVCG

F7SFVCW

Description:

FIL 70 ACC. 90° WALL CORNER GR.

FIL 70 ACC. 90° WALL CORNER WH.

**Product code:**


F7SUECG

F7SUECW

Description:

FIL 70 ACC. SUS END COVER PC GR.

FIL 70 ACC. SUS END COVER PC WH.

**Product code:**

F7SUHCG

F7SUHCW

Description:

FIL 70 ACC. SUS 90° CORNER GR.

FIL 70 ACC. SUS 90° CORNER WH.

ACCESORIES :
Optical**Product code:**

F7DIX/MMOP

Description:

FIL 70 ACC. OPAL DIFFUSER X/MM