Product datasheet

FIL 70

F71RE120HOOP830DW



FIL 70 OPAL REC 4400 WW DALI WH.

Description:

Finish:

Dimensions:

Recessed luminaire model FIL 70 OPAL REC 4400 WW DALI WH., LAMP brand. Made of matt white painted extruded aluminium with opal polycarbonate diffuser. Model for LED MID-POWER with warm white colour temperature and control DALI gear included. IP43, IK06 protection rating. Insulation class I. Photobiological safety group 0. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Weight: 2.667 g



Installation: Recessed


Recessing measures: 1,174 x 78 x 85 mm

Matte white RAL 9010 s: 1.162 x 89 x 70 mm

TECHNICAL SPECIFICATIONS:

Light output:	3.370 lm	⁰K :	3000
Plum:	30,7W	CRI :	80
Efficacy:	109,8 lm/w	MacAdam:	3
Туре:	MID POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	60.000 L80 B10 (Ta=25⁰C)	Gear:	Adjustable DALI
Power:	28W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:




LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es Worktitude for light

FIL 70

F71RE120HOOP830DW

FIL 70 OPAL REC 4400 WW DALI WH.



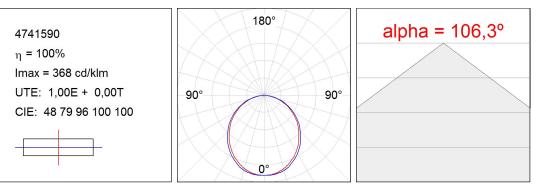

Worktitude for light

Product datasheet

FIL 70

ACCESORIES :

Assembly




Product code: ELWRST





Product code: F7COSUX/MMG F7COSUX/MMW



Worktitude for light



Product code: F7JO Description: ACC. INTM JOINT



47.00.39.3 Product code: F7PRREX/MMG F7PRREX/MMW

Description: FIL 70 ACC. REC PROFILE X/MM GR. FIL 70 ACC. REC PROFILE X/MM WH.



Product code: F7REECG F7REECW Description: FIL 70 ACC. REC END COVER GR. FIL 70 ACC. REC END COVER WH.

Product code:

F7REHCG F7REHCW

Description:

FIL 70 ACC. REC 90° CORNER GR. FIL 70 ACC. REC 90° CORNER WH.

ACCESORIES : Optical



Product code: F7DIX/MMOP

Description: FIL 70 ACC. OPAL DIFFUSER X/MM



