

## F71RE120LOOP840DW



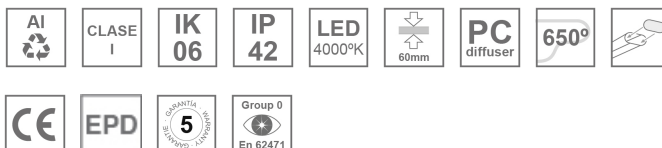
## FIL 70 OPAL REC 2600 NW DALI WH.

**Description:**

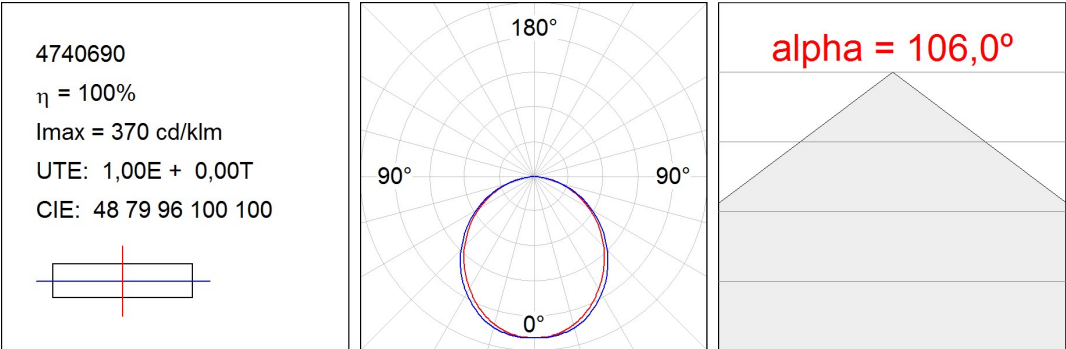
Recessed mounted structure model FIL 70 OPAL REC 2600 NW DALI, LAMP brand. Made of matt white lacquered extruded aluminium and with opal diffuser. Model for MID-POWER LED, with neutral white colour temperature and electronic control DALI gear included. IP43, IK06 protection rating. Insulation class I. Photobiological safety group 0. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte white RAL 9010**Dimensions:** 1.162 x 89 x 70 mm**Weight:** 2.662 g**Installation:** Recessed**Recessing measures:** 1,174 x 78 x 85 mm**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	2.143 lm	<b>°K :</b>	4000
<b>Plum:</b>	19,2W	<b>CRI :</b>	80
<b>Efficacy:</b>	111,6 lm/w	<b>MacAdam:</b>	3
<b>Type:</b>	MID POWER LED	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	60.000 L80 B10 (Ta=25°C)	<b>Gear:</b>	Adjustable DALI
<b>Power:</b>	17W		

**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :



---

**ACCESORIES :**
**Assembly****Product code:**

ELWRST

**Description:**

ACC. ELECTROSTATICS WRIST STRAP

**Product code:**

F7COSUX/MMG

F7COSUX/MMW

**Description:**

FIL 70 ACC. COVER X/MM GR.

FIL 70 ACC. COVER X/MM WH.

**Product code:**

F7JO

**Description:**

ACC. INTM JOINT

**Product code:**


F7PRREX/MMG

F7PRREX/MMW

**Description:**

FIL 70 ACC. REC PROFILE X/MM GR.

FIL 70 ACC. REC PROFILE X/MM WH.

**Product code:**


F7REECG

F7REECW

**Description:**

FIL 70 ACC. REC END COVER GR.

FIL 70 ACC. REC END COVER WH.

**Product code:**

F7REHCG

F7REHCW

**Description:**

FIL 70 ACC. REC 90° CORNER GR.

FIL 70 ACC. REC 90° CORNER WH.

---

**ACCESORIES :**
**Optical****Product code:**

F7DIX/MMOP

**Description:**

FIL 70 ACC. OPAL DIFFUSER X/MM

