#### **Product datasheet**

**FIL 70** 

## F71RE120LOPR830NG



70 mm

89


70

85

### FIL 70 PRISM REC 2600 WW GR.


#### **Description:**

Recessed luminaire model FIL 70 PRISM REC 2600 WW GR., LAMP brand. Made of satin grey painted extruded aluminium with prismatic polycarbonate diffuser. Model for MID-POWER LED, with warm white colour temperature and control gear included. Glare rating <19 (for 4h, 8h 70/50/20). IP43, IK06 protection rating. Insulation class I. Photobiological safety group 0. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

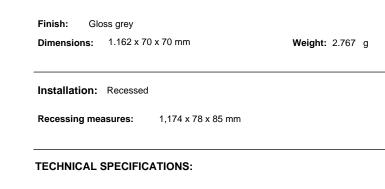

Light output:	2.218 lm	⁰К:	3000	
Plum:	19,4W	CRI :	80	
Efficacy:	114,4 lm/w	MacAdam:	3	
UGR:	<19	Power Supply:	220-240V 50/60Hz	
Туре:	MID POWER LED	Gear: Electronic		
LED Lifetime:	50.000 L80 B10 (Ta=25⁰C)			
Power:	17W			

### Light output tolerance +/- 10%



### **CUSTOM MADE OPTIONS:**



Worktitude for light

# **FIL 70**

F71RE120LOPR830NG

FIL 70 PRISM REC 2600 WW GR.



14741703	180°	alpha = 78,2°	H (m)	D (m)	Emax	Emed
η = 100%			1	1,63	1353	697
lmax = 614 cd/klm						
UTE: 1,00C	90° 90°		2	3,25	338	174
CIE: 70 95 99 100 100						
			3	4,88	150	77
	Oc		4	6,51	85	44

Worktitude for light

### Product datasheet

# **FIL 70**

# ACCESORIES :

## Assembly




Product code: ELWRST





Product code: F7COSUX/MMG F7COSUX/MMW





Product code: F7JO Description: ACC. INTM JOINT



47.00.39.3 Product code: F7PRREX/MMG F7PRREX/MMW





Product code: F7REECG F7REECW







Product code: F7TEREHCG F7TEREHCW

#### Description:

FIL 70 TECH ACC. REC 90° CORNER GR. FIL 70 TECH ACC. REC 90° CORNER WH.

Data according to regulations 2019/2020/EU and 2019/2015/EU



