

FC1500LO68OP8400W



FINECURVE IP67 24V 2600LM 50W 840 5MX19

Description:

Flexible strip model FINECURVE IP67 24V 2600LM 50W 840 5MX19 LAMP brand. Model for MID-POWER LED, neutral white color temperature. IP67 protection rating. Insulation class III. Supplied with a 5 meters.

Finish: Matte white RAL 9010

Weight: 1.000 g



Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output: 2.275 lm

°K : 4000

Type: MID POWER EPISTAR

CRI : 80

LED Lifetime: 36.000


MacAdam: 5

Power: 55W

Power Supply: 24V 50-60Hz

Gear: Without gear (requires external gear)


Light output tolerance +/- 10%

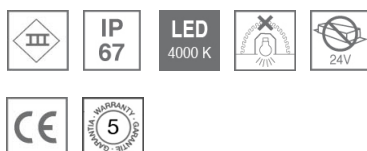

FC1500LO68OP8400W

FINECURVE IP67 24V 2600LM 50W 840 5MX19

PHOTOMETRIC DATA :

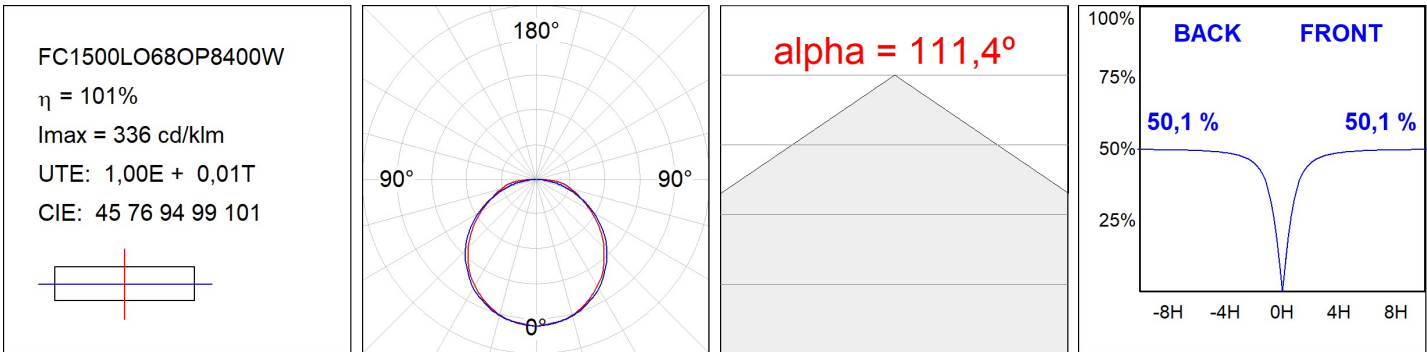

ACCESORIES :

Assembly




Product code:

CT4P67N

Description:

ACC. IP67 4P CONNECTOR



Product code:

FC1FX30G

Description:

FINE CURVE LED ACC.WALL BRACKET 25MM GR

ACCESORIES :

Adjustment and control



Product code:

DRV2010024D

Description:

DRV 100W 24V 220-240V DA IND.



Product code:

DRV6710024N

Description:

DRV 100W 24V 100-305V NR IP67



Product code:

DRV688024N

Description:

ACC. DRIVER IP68 24V 80W