
Product datasheet

GAP

GA230MF830NI





GAP G2 2800 WW MFL INOX

Description:

Outdoor recessed Downlight/Uplight model GAP G2 2800, LAMP brand. Made of injected aluminium, with a cataphoresis treatment, lacquered in black colour, tempered glass and exterior ring made of stainless steel AISI 316. Model with HI-POWER LED, with 3000K colour temperature, CRI 80 and control gear included. With Medium Flood optics. It allows for a rotation from 0° to 90°, and a tilt between -30° and 30°. With a grades of protection IP67, IK10. Insulation class I. Lifetime: 50.000 L90 B10

Finish: Stainless steel AISI 316


Weight: 3.800 g

Installation: Floor recessed

TECHNICAL SPECIFICATIONS:

Light output:	2.113 lm	⁰К:	3000
Plum:	23W	CRI :	80
Efficacy:	91,9 lm/w	MacAdam:	3
Туре:	HIGH POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L90 B10 (Ta=25⁰C)	Gear:	Electronic
Power:	20W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es Worktitude for light


GAP

GA230MF830NI

GAP G2 2800 WW MFL INOX



PHOTOMETRIC DATA :

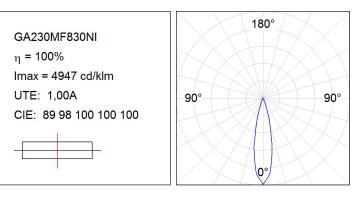

Product datasheet

GAP

ACCESORIES :

Assembly



Product code: GAREBOB

Description: GAP ACC. REC BOX



GARERIRDM

