

GA230WF830NI



**GAP G2 2800 WW WFL INOX**


**Description:**

Outdoor recessed Downlight/Uplight model GAP G2 2800, LAMP brand. Made of injected aluminium, with a cataphoresis treatment, lacquered in black colour, tempered glass and exterior ring made of stainless steel AISI 304. Model with HI-POWER LED, with 3000K colour temperature, CRI 80 and control gear included. With Wide Flood optics. It allows for a rotation from 0° to 90°, and a tilt between -30° and 30°. With a grades of protection IP67, IK10. Insulation class I. Lifetime: 50.000 L90 B10

**Finish:** Stainless steel AISI 304

**Weight:** 3.800 g

**Installation:** Floor recessed



**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	2.124 lm	<b>°K :</b>	3000
<b>Plum:</b>	23W	<b>CRI :</b>	80
<b>Efficacy:</b>	92,3 lm/w	<b>MacAdam:</b>	3
<b>Type:</b>	HIGH POWER NICHIA	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50.000 L90 B10 (Ta=25°C)	<b>Gear:</b>	Electronic
<b>Power:</b>	20W		


*Light output tolerance +/- 10%*



**CUSTOM MADE OPTIONS:**



PHOTOMETRIC DATA :

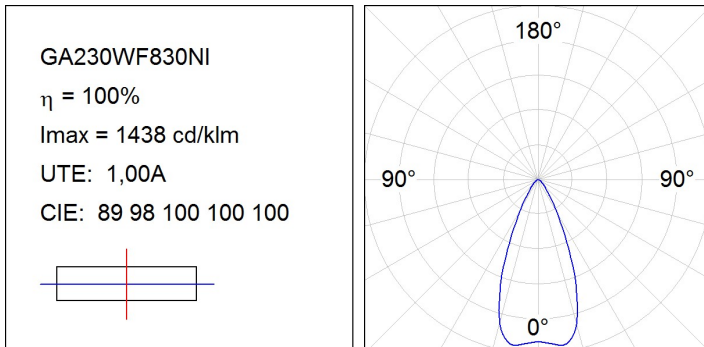

ACCESORIES :

Assembly



**Product code:**

GAREBOB

**Description:**

GAP ACC. REC BOX



**Product code:**

GARERIRDM

**Description:**

GAP ACC. REC CEILING RING

