

HANCE DOWNLIGHT

HD2RE20SP930NW



HANCE G2 DOWN REC 2000 9WW SP WH

Description:

LAMP multidirectional recessed downlight HANCE G2 DOWN REC 2000. Allowing 355° rotation and tilting up to 30°. Body and frame made of die-cast aluminium for proper thermal management. Black polycarbonate injection moulded anti-glare ring. 20° spot reflector. LED COB, 3000K and CRI90. Electronic ON OFF control gear included. IP20, IK07 ratings. Insulation Class II. LED life time: 72.000 L80B10 (Ta=25°C). Available finishes: Textured white and textured black.

Finish: Texturised white RAL 9010

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.889 lm	°K :	3000
Plum:	20,8W	CRI :	90
Efficacy:	90,8 lm/w	R9 :	60
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	72.000 L80B10 (Ta=25°C)	Gear:	Electronic
Power:	18W		


Light output tolerance +/- 10%

**CUSTOM MADE OPTIONS:**

HD2RE20SP930NW

HANCE G2 DOWN REC 2000 9WW SP WH

PHOTOMETRIC DATA :

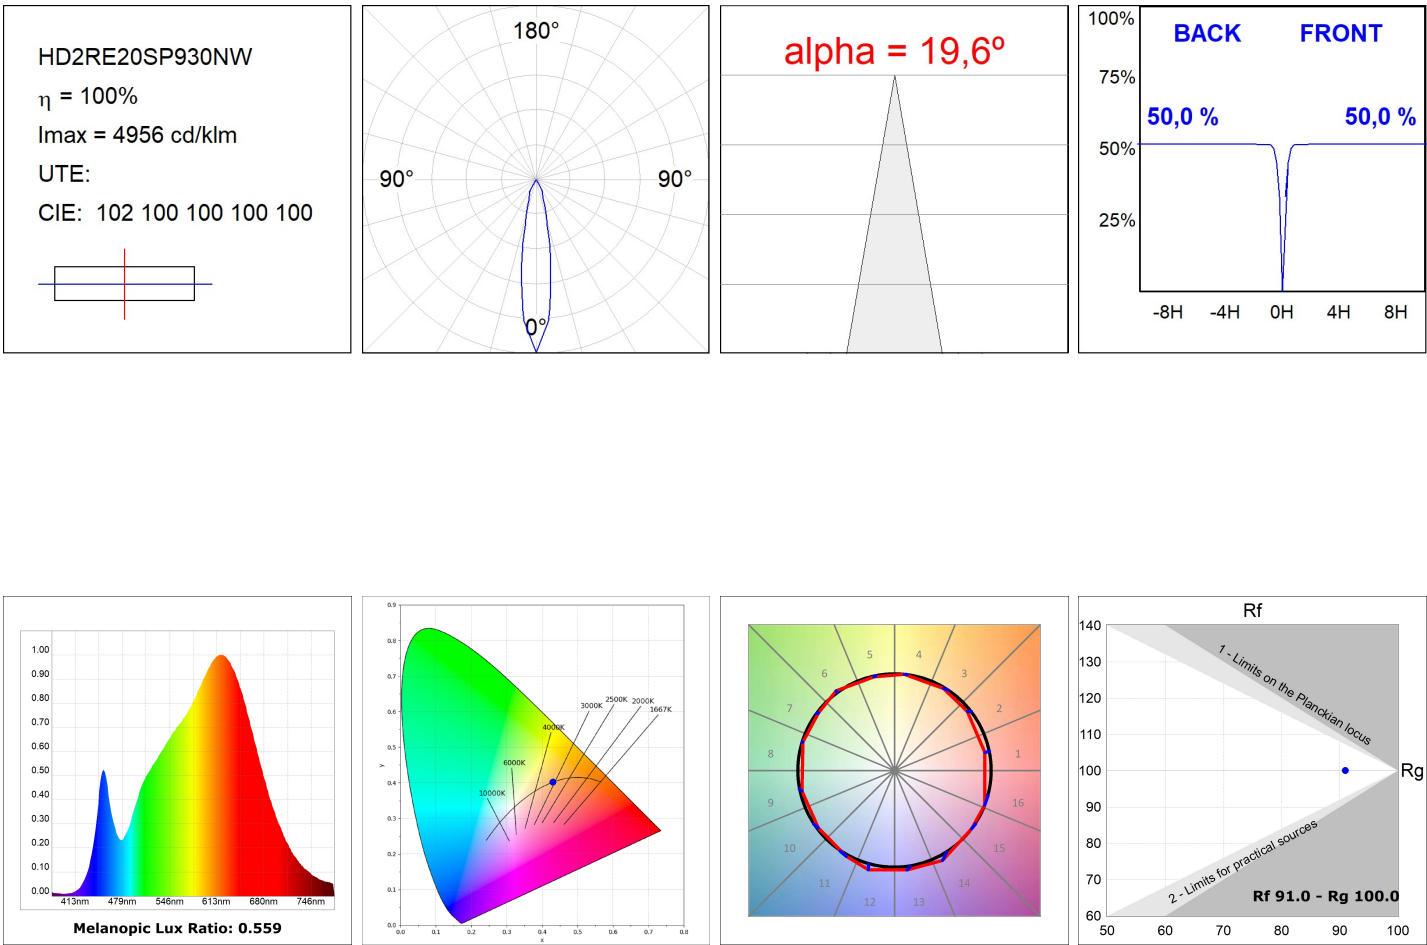

ACCESSORIES :

Optical



Product code:
HSCU50

Description:
HANCE 1000/2000 ACC. CUTTING BEAM



Product code:
HSHO50

Description:
HANCE 1000/2000 ACC. HONEYCOMB GRILLE



Product code:
HSRI65B

Description:
HANCE 1000/2000 ACC. RING DECO BK.



Product code:
HSRI65C

Description:
HANCE 1000/2000 ACC. RING DECO CO.



Product code:
HSRI65M

Description:
HANCE 1000/2000 ACC. RING DECO MET.



Product code:
HSRI65W

Description:
HANCE 1000/2000 ACC. RING DECO WH.



Product code:
HSTR50

Description:
HANCE 1000/2000 ACC. DIF TRANS