#### **Product datasheet**

## HANCE DOWNLIGHT

## HD2RE40FL940NB



## HANCE G2 DOWN REC 4000 9NW FL BK

#### **Description:**

LAMP multidirectional recessed downlight HANCE G2 DOWN REC 4000. Allowing 355° rotation and tilting up to 30°. Body and frame made of die-cast aluminium for proper thermal management. Black polycarbonate injection moulded anti-glare ring. 35° flood reflector. LED COB, 4000K and CRI90. Electronic ON OFF control gear included. IP20, IK07 ratings. Insulation Class II. LED life time: 72.000 L80B10 (Ta=25°C). Available finishes: Textured white and textured black.

155 0-30° Finish: Texturised black RAL 9011

Installation: Recessed

### **TECHNICAL SPECIFICATIONS:**

Light output:	3.800 lm	°K :	4000
Plum:	36,7W	CRI :	90
Efficacy:	103,5 lm/w	R9 :	64
Туре:	СОВ	MacAdam:	3
LED Lifetime:	72.000 L80B10 (Ta=25ºC)	Power Supply:	220-240V 50/60Hz
Power:	33W	Gear:	Electronic

#### Light output tolerance +/- 10%



## CUSTOM MADE OPTIONS:




LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es Worktitude for light


# HANCE DOWNLIGHT

HD2RE40FL940NB

HANCE G2 DOWN REC 4000 9NW FL BK



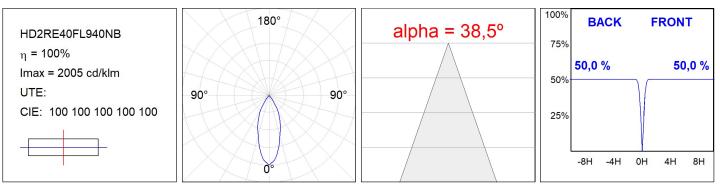

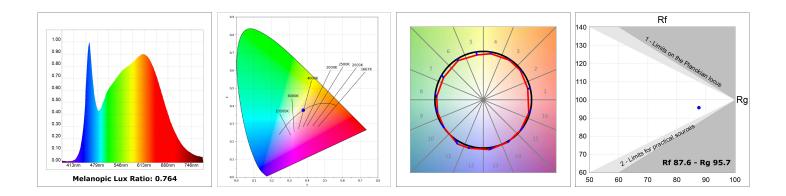

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Worktitude for light